

## DS14196

### EIA/TIA-232 5 Driver x 3 Receiver

#### General Description

The DS14196 is a five driver, three receiver device which conforms to the EIA/TIA-232-E and the ITU-T V.28 standards.


The flow-through pinout facilitates simple non-crossover board layout. The DS14196 provides a peripheral side one-chip solution for the common 9-pin serial RS-232 interface between data terminals and data communications equipment.

The DS14196 offers optimum performance when used with the DS14185 3 x 5 Driver/Receiver, a host side one-chip solution for the common 9-pin serial RS-232 interface between data terminals and data communications equipment.

#### Features


- Replaces two 1488s and one 1489
- Conforms to EIA/TIA-232-E and ITU-T V.28
- 5 drivers and 3 receivers
- Flow-through pinout
- Failsafe receiver outputs high when inputs open
- 20-pin wide SOIC package
- LapLink® compatible — 230.4 kbps data rate
- Pin compatible with: SN75196, GD75323

#### Connection Diagram

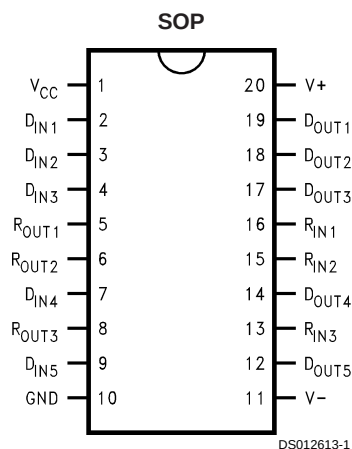

**Order Number DS14196WM**  
**See NS Package Number M20B**

#### Functional Diagram

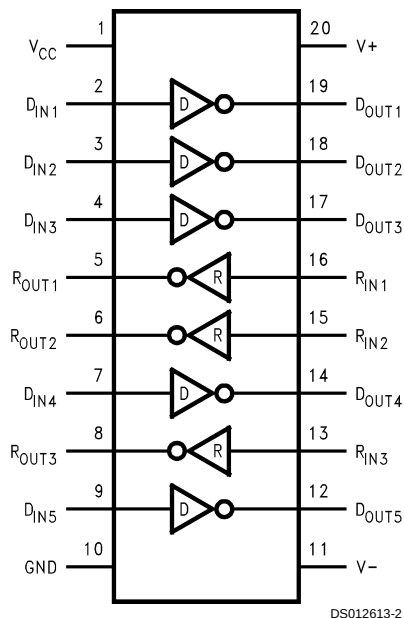

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|                                           |                       |
|-------------------------------------------|-----------------------|
| Supply Voltage ( $V_{CC}$ )               | +7V                   |
| Supply Voltage ( $V^+$ )                  | +15V                  |
| Supply Voltage ( $V^-$ )                  | -15V                  |
| Driver Input Voltage                      | 0V to $V_{CC}$        |
| Driver Output Voltage (Power Off)         | $\pm 15V$             |
| Receiver Input Voltage                    | $\pm 25V$             |
| Receiver Output Voltage ( $R_{OUT}$ )     | 0V to $V_{CC}$        |
| Maximum Power Package Dissipation @ +25°C |                       |
| M Package                                 | 1524 mW               |
| Derate M Package                          | 12.2 mW/°C above 25°C |

|                                            |                 |
|--------------------------------------------|-----------------|
| Storage Temperature Range                  | -65°C to +150°C |
| Lead Temperature Range (Soldering, 4 sec.) | +260°C          |
| ESD Ratings (HBM, 1.5 k $\Omega$ , 100 pF) | $\geq 1.5$ kV   |

**Recommended Operating Conditions**

|                                          | Min   | Nom   | Max   | Units |
|------------------------------------------|-------|-------|-------|-------|
| Supply Voltage ( $V_{CC}$ )              | +4.75 | +5.0  | +5.25 | V     |
| Supply Voltage ( $V^+$ )                 | +9.0  | +12.0 | +13.2 | V     |
| Supply Voltage ( $V^-$ )                 | -13.2 | -12.0 | -9.0  | V     |
| Operating Free Air Temperature ( $T_A$ ) | 0     | +25   | +70   | °C    |

**Electrical Characteristics** (Note 2) (Note 3)

Over recommended operating supply and temperature ranges unless otherwise specified

| Symbol                       | Parameter                                          | Conditions                                                                                      |                                                  | Min   | Typ   | Max  | Units |
|------------------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------|-------|-------|------|-------|
| DEVICE CHARACTERISTICS       |                                                    |                                                                                                 |                                                  |       |       |      |       |
| I <sub>CC</sub>              | V <sub>CC</sub> Supply Current                     | No Load, All Inputs at +5V                                                                      |                                                  |       | 13    | 22   | mA    |
| I <sup>+</sup>               | V <sup>+</sup> Supply Current                      | No Load, All Driver Inputs at 0.8V or +2V. All Receiver Inputs at 0.8V or 2.4V.                 | V <sup>+</sup> = +9V, V <sup>-</sup> = -9V       |       | 16    | 26   | mA    |
|                              |                                                    |                                                                                                 | V <sup>+</sup> = +13.2V, V <sup>-</sup> = -13.2V |       | 23    | 36   | mA    |
| I <sup>-</sup>               | V <sup>-</sup> Supply Current                      |                                                                                                 | V <sup>+</sup> = +9V, V <sup>-</sup> = -9V       |       | -18   | -26  | mA    |
|                              |                                                    |                                                                                                 | V <sup>+</sup> = +13.2V, V <sup>-</sup> = -13.2V |       | -25   | -36  | mA    |
| DRIVER CHARACTERISTICS       |                                                    |                                                                                                 |                                                  |       |       |      |       |
| V <sub>IH</sub>              | High Level Input Voltage                           |                                                                                                 |                                                  | 2.0   |       |      | V     |
| V <sub>IL</sub>              | Low Level Input Voltage                            |                                                                                                 |                                                  |       |       | 0.8  | V     |
| I <sub>IH</sub>              | High Level Input Current                           | V <sub>IN</sub> = 5V                                                                            |                                                  |       |       | 10   | μA    |
| I <sub>IL</sub>              | Low Level Input Current                            | V <sub>IN</sub> = 0V                                                                            |                                                  |       | -1.1  | -1.5 | mA    |
| V <sub>OH</sub>              | High Level Output Voltage                          | R <sub>L</sub> = 3 kΩ, V <sub>IN</sub> = 0.8V, V <sup>+</sup> = +9V, V <sup>-</sup> = -9V       |                                                  | 6     | 7     |      | V     |
|                              |                                                    | R <sub>L</sub> = 3 kΩ, V <sub>IN</sub> = 0.8V, V <sup>+</sup> = +12V, V <sup>-</sup> = -12V     |                                                  | 8     | 9     |      | V     |
|                              |                                                    | R <sub>L</sub> = 7 kΩ, V <sub>IN</sub> = 0.8V, V <sup>+</sup> = +13.2V, V <sup>-</sup> = -13.2V |                                                  | 10    | 11.5  |      | V     |
| V <sub>OL</sub>              | Low Level Output Voltage                           | R <sub>L</sub> = 3 kΩ, V <sub>IN</sub> = 2V, V <sup>+</sup> = +9V, V <sup>-</sup> = -9V         |                                                  |       | -7    | -6   | V     |
|                              |                                                    | R <sub>L</sub> = 3 kΩ, V <sub>IN</sub> = 2V, V <sup>+</sup> = +12V, V <sup>-</sup> = -12V       |                                                  |       | -10   | -8   | V     |
|                              |                                                    | R <sub>L</sub> = 7 kΩ, V <sub>IN</sub> = 2V, V <sup>+</sup> = +13.2V, V <sup>-</sup> = -13.2V   |                                                  |       | -11.5 | -10  | V     |
| I <sub>OS</sub> <sup>+</sup> | Output High Short Circuit Current (Note 4)         | V <sub>OUT</sub> = 0V, V <sub>IN</sub> = 0.8V                                                   |                                                  | -6    | -12   | -18  | mA    |
| I <sub>OS</sub> <sup>-</sup> | Output Low Short Circuit Current (Note 4)          | V <sub>OUT</sub> = 0V, V <sub>IN</sub> = 2.0V                                                   |                                                  | 6     | 12    | 18   | mA    |
| R <sub>O</sub>               | Output Resistance                                  | -2V ≤ V <sub>OUT</sub> ≤ +2V, V <sup>+</sup> = V <sup>-</sup> = V <sub>CC</sub> = 0V            |                                                  | 300   |       |      | Ω     |
|                              |                                                    | -2V ≤ V <sub>OUT</sub> ≤ +2V, V <sup>+</sup> = V <sup>-</sup> = V <sub>CC</sub> = Open Circuit  |                                                  | 300   |       |      | Ω     |
| RECEIVER CHARACTERISTICS     |                                                    |                                                                                                 |                                                  |       |       |      |       |
| V <sub>TH</sub>              | Input High Threshold (Recognized as a High Signal) | V <sub>OUT</sub> ≤ 0.4V, I <sub>O</sub> = 3.2 mA                                                |                                                  |       | 1.85  | 2.4  | V     |
| V <sub>TL</sub>              | Input Low Threshold (Recognized as a Low Signal)   | V <sub>OUT</sub> ≥ 2.5V, I <sub>O</sub> = -0.5 mA                                               |                                                  | 0.7   | 1.0   |      | V     |
| R <sub>IN</sub>              | Input Resistance                                   | V <sub>IN</sub> = ±3V to ±15V                                                                   |                                                  | 3.0   | 3.8   | 7.0  | kΩ    |
| I <sub>IN</sub>              | Input Current                                      | V <sub>IN</sub> = +15V                                                                          |                                                  | 2.1   | 4.0   | 5.0  | mA    |
|                              |                                                    | V <sub>IN</sub> = +3V                                                                           |                                                  | 0.43  | 0.7   | 1.0  | mA    |
|                              |                                                    | V <sub>IN</sub> = -15V                                                                          |                                                  | -2.1  | -4.0  | -5.0 | mA    |
|                              |                                                    | V <sub>IN</sub> = -3V                                                                           |                                                  | -0.43 | -0.7  | -1.0 | mA    |

## Electrical Characteristics (Note 2) (Note 3) (Continued)

Over recommended operating supply and temperature ranges unless otherwise specified

| Symbol                          | Parameter                          | Conditions                                                       | Min  | Typ  | Max | Units |
|---------------------------------|------------------------------------|------------------------------------------------------------------|------|------|-----|-------|
| <b>RECEIVER CHARACTERISTICS</b> |                                    |                                                                  |      |      |     |       |
| $V_{OH}$                        | High Level Output Voltage (Note 7) | $I_{OH} = -0.5 \text{ mA}, V_{IN} = -3\text{V}$                  | 2.6  | 4.0  |     | V     |
|                                 |                                    | $I_{OH} = -10 \text{ }\mu\text{A}, V_{IN} = -3\text{V}$          | 4.0  | 4.9  |     | V     |
|                                 |                                    | $I_{OH} = -0.5 \text{ mA}, V_{IN} = \text{Open Circuit}$         | 2.6  | 4.0  |     | V     |
|                                 |                                    | $I_{OH} = -10 \text{ }\mu\text{A}, V_{IN} = \text{Open Circuit}$ | 4.0  | 4.9  |     | V     |
| $V_{OL}$                        | Low Level Output Voltage           | $I_{OL} = 3.2 \text{ mA}, V_{IN} = +3\text{V}$                   |      | 0.2  | 0.4 | V     |
| $I_{OSR}$                       | Short Circuit Current              | $V_{OUT} = 0\text{V}, V_{IN} = 0\text{V}$ (Note 4)               | -1.7 | -2.7 | -4  | mA    |

## Switching Characteristics (Note 3) (Note 5) (Note 6)

$T_A = 25^\circ\text{C}$

| Symbol                          | Parameter                     | Conditions                                                                                          | Min | Typ | Max | Units |
|---------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------|-----|-----|-----|-------|
| DRIVER CHARACTERISTICS          |                               |                                                                                                     |     |     |     |       |
| t <sub>PHL</sub>                | Propagation Delay High to Low | R <sub>L</sub> = 3 kΩ, C <sub>L</sub> = 50 pF<br>(Figures 1, 2)                                     |     | 60  | 350 | ns    |
| t <sub>PLH</sub>                | Propagation Delay Low to High |                                                                                                     |     | 300 | 450 | ns    |
| t <sub>r</sub> , t <sub>f</sub> | Rise/Fall Time (Note 8)       |                                                                                                     |     | 40  |     | ns    |
| RECEIVER CHARACTERISTICS        |                               |                                                                                                     |     |     |     |       |
| t <sub>PHL</sub>                | Propagation Delay High to Low | R <sub>L</sub> = 1.5 kΩ, C <sub>L</sub> = 15 pF<br>(includes fixture plus probe),<br>(Figures 3, 4) |     | 150 | 350 | ns    |
| t <sub>PLH</sub>                | Propagation Delay Low to High |                                                                                                     |     | 240 | 350 | ns    |
| t <sub>r</sub>                  | Rise Time                     |                                                                                                     |     | 40  | 175 | ns    |
| t <sub>f</sub>                  | Fall Time                     |                                                                                                     |     | 40  | 100 | ns    |

**Note 1:** Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The table of Electrical Characteristics specifies conditions of device operation.

**Note 2:** Current into device pins is defined as positive. Current out of the device pins is defined as negative. All voltages are referenced to ground unless otherwise specified. For current, minimum and maximum values are specified as an absolute value and the sign is used to indicate direction. For voltage logic levels, the more positive value is designated as maximum. For example, if -6V is a maximum, the typical value -6.8V is more negative.

**Note 3:** All typicals are given for:  $V_{CC} = +5\text{V}$ ,  $V^+ = +12\text{V}$ ,  $V^- = -12\text{V}$ ,  $T_A = +25^\circ\text{C}$ .

**Note 4:** Only one driver output shorted at a time.


**Note 5:** Generator characteristics for driver input:  $f = 64 \text{ kHz}$  (128 kbps),  $t_r = t_f < 10 \text{ ns}$ ,  $V_{IH} = 3\text{V}$ ,  $V_{IL} = 0\text{V}$ , duty cycle = 50%.

**Note 6:** Generator characteristics for receiver input:  $f = 64 \text{ kHz}$  (128 kbps),  $t_r = t_f = 200 \text{ ns}$ ,  $V_{IH} = 3\text{V}$ ,  $V_{IL} = -3\text{V}$ , duty cycle = 50%.

**Note 7:** If receiver inputs are unconnected, receiver output is a logic high.


**Note 8:** Refer to typical curves. Driver output slew rate is measured from the +3V to the -3V level on the output waveform. Inputs not under test are connected to  $V_{CC}$  or GND. Slew rate is determined by load capacitance. To comply with a 30 V/ $\mu\text{s}$  maximum slew rate, a minimum load capacitance of 390 pF is recommended.

## Parameter Measurement Information

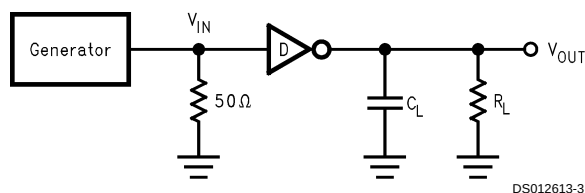


DS012613-3

**FIGURE 1. Driver Propagation Delay and Transition Time Test Circuit (Note 5)**

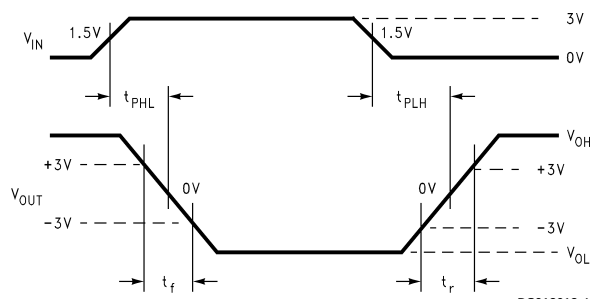


DS012613-4

**FIGURE 2. Driver Propagation Delay and Transition Time Waveforms Slew Rate (SR) = 6V/(t<sub>r</sub> or t<sub>f</sub>)**

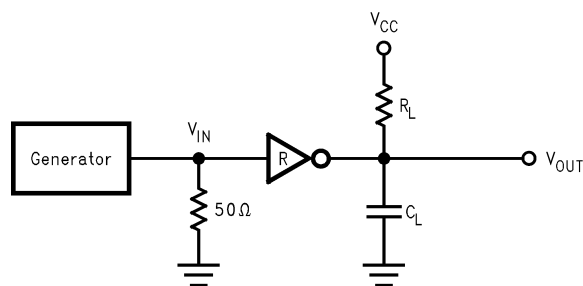

DS012613-5

**FIGURE 3. Receiver Propagation Delay and Transition Time Test Circuit (Note 6)**

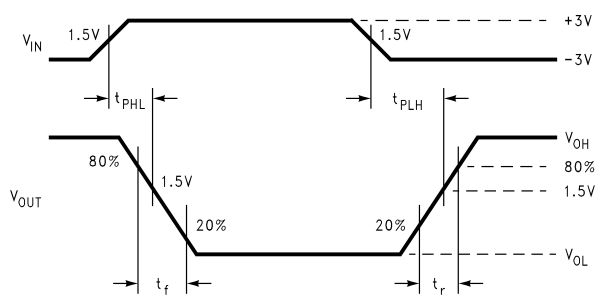

DS012613-6

**FIGURE 4. Receiver Propagation Delay and Transition Time Waveform**

## Pin Descriptions

| Pin #              | Pin Name         | Description                                               |
|--------------------|------------------|-----------------------------------------------------------|
| 2, 3, 4, 7, 9      | D <sub>IN</sub>  | Driver Input Pins                                         |
| 12, 14, 17, 18, 19 | D <sub>OUT</sub> | Driver Output Pins, RS-232 Levels                         |
| 13, 15, 16         | R <sub>IN</sub>  | Receiver Input Pins, RS-232 Levels                        |
| 5, 6, 8            | R <sub>OUT</sub> | Receiver Output Pins                                      |
| 10                 | GND              | Ground                                                    |
| 20                 | V <sup>+</sup>   | Positive Power Supply Pin (+9.0 ≤ V <sup>+</sup> ≤ +13.2) |
| 11                 | V <sup>-</sup>   | Negative Power Supply Pin (-9.0 ≤ V <sup>-</sup> ≤ -13.2) |
| 1                  | V <sub>CC</sub>  | Positive Power Supply Pin (+5V ±5%)                       |

## Applications Information

In a typical Data Terminal Equipment (DTE) to Data Circuit-Terminating Equipment (DCE) 9-pin de-facto interface implementation, 2 data lines and 6 control lines are required. The data lines are TXD and RXD. The control lines are RTS, DTR, DSR, DCD, CTS and RI.

The DS14196 is a 5 x 3 Driver/Receiver and offers a single chip solution for this DTE interface. As shown in Figure 5, this interface allows for direct flow-thru interconnect. For a more conservative design, the user may wish to insert ground traces between the signal lines to minimize cross talk.

### FAILSAFE RECEIVER OUTPUTS

The DS14196 features failsafe receiver outputs. In failsafe mode, if the receiver input becomes zero or an open-circuit, the receiver output is pulled to a high level.

### LapLink COMPATIBILITY

The DS14196 can easily provide 128 kbps data rate under maximum driver load conditions of C<sub>L</sub> = 2500 pF and R<sub>L</sub> = 3 kΩ, while power supplies are:

$$V_{CC} = +4.75V, V^+ = 10.8V, V^- = -10.8V$$

### MOUSE DRIVING

A typical mouse can be powered from the drivers. Two driver outputs connected in parallel and set to V<sub>OH</sub> can be used to supply power to the V<sup>+</sup> pin of the mouse. The third driver output is set to V<sub>OL</sub> to sink the current from the V<sup>-</sup> terminal. Refer to typical curves of V<sub>OUT</sub>/I<sub>OUT</sub>. Typical mouse specifications are:

$$10 \text{ mA at } +6V \quad 5 \text{ mA at } -6V$$

# Applications Information (Continued)


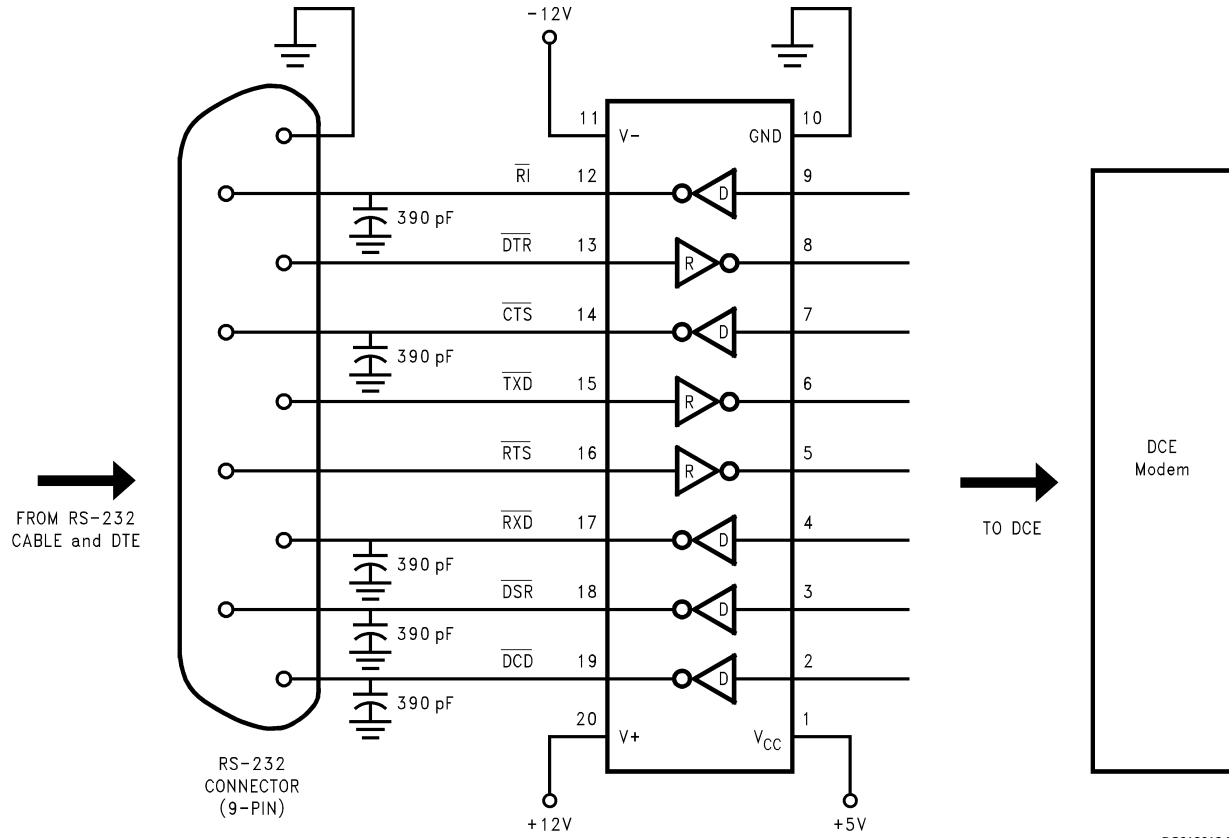


FIGURE 5. Typical DCE Application

## Typical Performance Characteristics

### Driver Output Slew Rate between +3V and -3V vs Load Capacitance


Conditions:  $V_{CC} = 5V$ ,  $R_L = 5\text{ k}\Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $f_{IN} = 64\text{ kHz}$  Square Wave

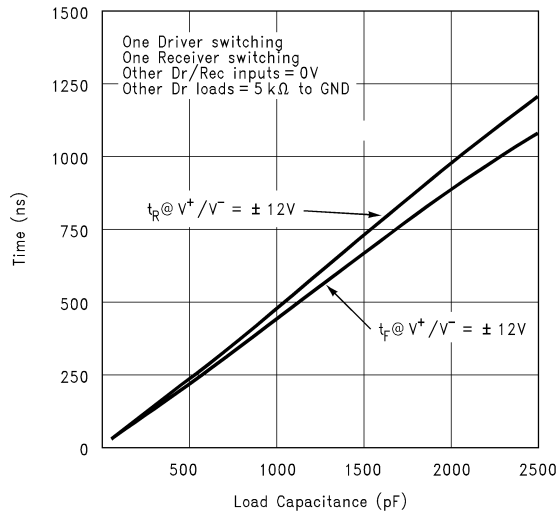

DS012613-8


### Driver Output Voltage vs Frequency and $C_L$

Conditions:  $V_{CC} = 5V$ ,  $R_L = 5\text{ k}\Omega$ ,  $T_A = 25^\circ\text{C}$

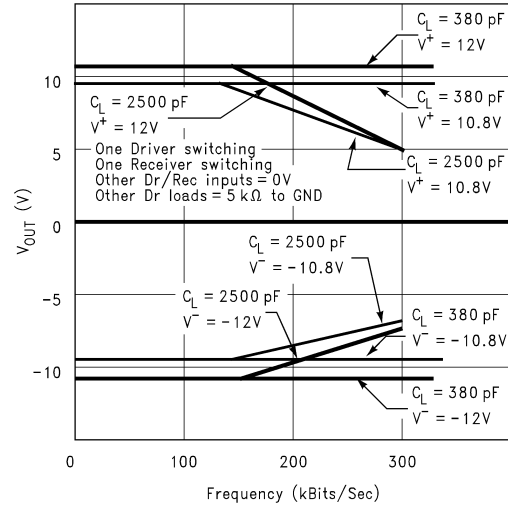


DS012613-9

### Driver Output Current vs Output Voltage

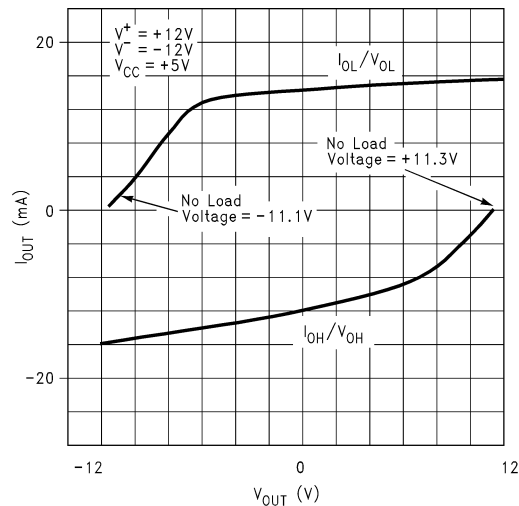

DS012613-10

# Physical Dimensions inches (millimeters) unless otherwise noted

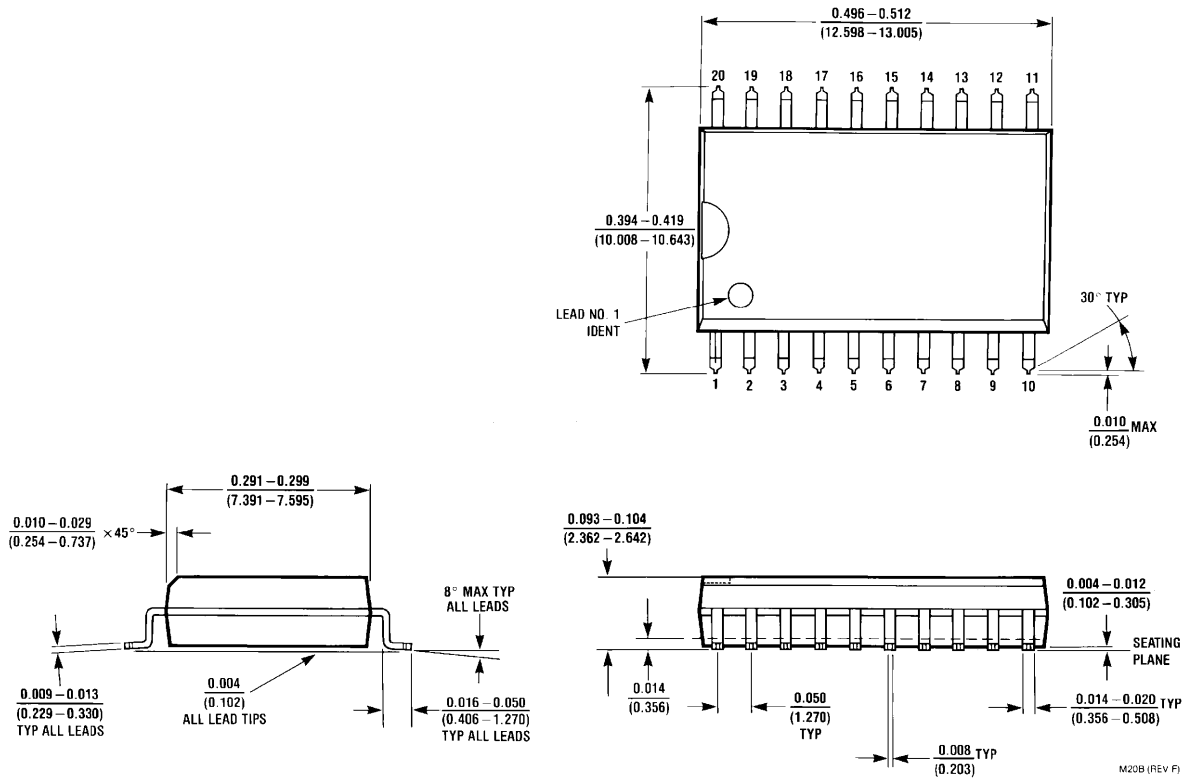

**20-Lead (0.300" Wide) Molded Small Outline Package, JEDEC**  
**Order Number DS14196WM**  
**NS Package Number M20B**

## LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
Americas  
Tel: 1-800-272-9959  
Fax: 1-800-737-7018  
Email: support@nsc.com  
www.national.com

**National Semiconductor Europe**  
Fax: +49 (0) 180-530 85 86  
Email: europe.support@nsc.com  
Deutsch Tel: +49 (0) 69 9508 6208  
English Tel: +44 (0) 870 24 0 2171  
Français Tel: +33 (0) 1 41 91 8790

**National Semiconductor Asia Pacific Customer Response Group**  
Tel: 65-2544466  
Fax: 65-2504466  
Email: ap.support@nsc.com

**National Semiconductor Japan Ltd.**  
Tel: 81-3-5639-7560  
Fax: 81-3-5639-7507