

DP7303/DP8303

6501126 NATL SEMICOND, (MEMORY)

42C 42954

D



Bus Transceivers



T-52-31

DP7303/DP8303 8-Bit TRI-STATE® Bidirectional Transceiver (Inverting)

Features

- 8-bit bidirectional data flow reduces system package count
- Bidirectional TRI-STATE inputs/outputs interface with bus oriented systems
- PNP inputs reduce input loading
- Output high voltage interfaces with TTL, MOS, and CMOS
- 48 mA/300 pF bus drive capability
- Pinouts simplify system interconnections
- Transmit/Receive and chip disable simplify control logic
- Compact 20-pin dual-in-line package
- Bus port glitch free power up/down

Logic and Connection Diagrams

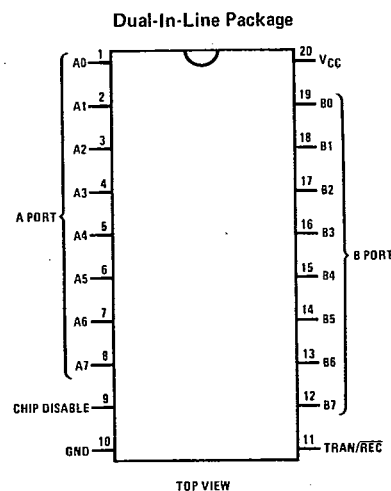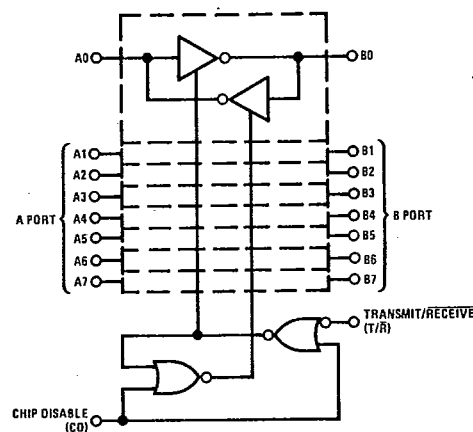

Order Number DP7303J, DP8303J,
or DP8303N
See NS Package J20A or N20A

Logic Table

INPUTS		RESULTING CONDITIONS	
Chip Disable	Transmit/Receive	A Port	B Port
0	0	OUT	IN
0	1	IN	OUT
1	X	TRI-STATE	TRI-STATE

X = Don't care

6501126 NATL SEMICOND, (MEMORY)

42C 42955 D

Absolute Maximum Ratings (Note 1)

Supply Voltage	7V
Input Voltage	5.5V
Output Voltage	5.5V
Storage Temperature	-65°C to +150°C
Maximum Power Dissipation* at 25°C	
Cavity Package	1667 mW
Molded Package	1832 mW
Lead Temperature (soldering, 10 seconds)	300°C

*Derate cavity package 11.1 mW/°C above 25°C; derate molded package 14.7 mW/°C.

Recommended Operating Conditions

	Min	Max	Units
Supply Voltage (V _{CC})			
DP7303	4.5	5.5	V
DP8303	4.75	5.25	V
Temperature (T _A)			
DP7303	-55	125	°C
DP8303	0	70	°C

T-52-31

DC Electrical Characteristics (Notes 2 and 3)

Parameter		Conditions		Min	Typ	Max	Units
A Port (A0-A7)							
V _{IH}	Logical "1" Input Voltage	CD = V _{IL} , T/ $\bar{R}$ = 2.0V		2.0			V
V _{IL}	Logical "0" Input Voltage	CD = V _{IL} , T/ $\bar{R}$ = 2.0V	DP8303			0.8	V
			DP7303			0.7	V
V _{OH}	Logical "1" Output Voltage	CD = T/ $\bar{R}$ = V _{IL}	I _{OH} = -0.4 mA	V _{CC} -1.15	V _{CC} -0.7		V
			I _{OH} = -3 mA	2.7	3.95		V
V _{OL}	Logical "0" Output Voltage	CD = T/ $\bar{R}$ = V _{IL}	I _{OL} = 16 mA (8303)		0.35	0.5	V
			I _{OL} = 8 mA (both)		0.3	0.4	V
I _{OS}	Output Short Circuit Current	CD = V _{IL} , T/ $\bar{R}$ = V _{IL} , V _O = 0V, V _{CC} = max, Note 4		-10	-38	-75	mA
I _{IH}	Logical "1" Input Current	CD = V _{IL} , T/ $\bar{R}$ = 2.0V, V _{IH} = 2.7V			0.1	80	μ A
I _I	Input Current at Maximum Input Voltage	CD = 2.0V, V _{CC} = max, V _{IH} = 5.25V				1	mA
I _{IL}	Logical "0" Input Current	CD = V _{IL} , T/ $\bar{R}$ = 2.0V, V _{IN} = 0.4V			-70	-200	μ A
V _{CLAMP}	Input Clamp Voltage	CD = 2.0V, I _{IN} = -12 mA			-0.7	-1.5	V
I _{OD}	Output/Input TRI-STATE Current	CD = 2.0V	V _{IN} = 0.4V			-200	μ A
			V _{IN} = 4.0V			80	μ A
B Port (B0-B7)							
V _{IH}	Logical "1" Input Voltage	CD = V _{IL} , T/ $\bar{R}$ = V _{IL}		2.0			V
V _{IL}	Logical "0" Input Voltage	CD = V _{IL} , T/ $\bar{R}$ = V _{IL}	DP8303			0.8	V
			DP7303			0.7	V
V _{OH}	Logical "1" Output Voltage	CD = V _{IL} , T/ $\bar{R}$ = 2.0V	I _{OH} = -0.4 mA	V _{CC} -1.15	V _{CC} -0.8		V
			I _{OH} = -5 mA	2.7	3.9		V
			I _{OH} = -10 mA	2.4	3.6		V
V _{OL}	Logical "0" Output Voltage	CD = V _{IL} , T/ $\bar{R}$ = 2.0V	I _{OL} = 20 mA		0.3	0.4	V
			I _{OL} = 48 mA		0.4	0.5	V
I _{OS}	Output Short Circuit Current	CD = V _{IL} , T/ $\bar{R}$ = 2.0V, V _O = 0V, V _{CC} = max, Note 4		-25	-50	-150	mA
I _{IH}	Logical "1" Input Current	CD = V _{IL} , T/ $\bar{R}$ = V _{IL} , V _{IH} = 2.7V			0.1	80	μ A
I _I	Input Current at Maximum Input Voltage	CD = 2.0V, V _{CC} = max, V _{IH} = 5.25V				1	mA
I _{IL}	Logical "0" Input Current	CD = V _{IL} , T/ $\bar{R}$ = V _{IL} , V _{IN} = 0.4V			-70	-200	μ A
V _{CLAMP}	Input Clamp Voltage	CD = 2.0V, I _{IN} = -12 mA			-0.7	-1.5	V
I _{OD}	Output/Input TRI-STATE Current	CD = 2.0V	V _{IN} = 0.4V			-200	μ A
			V _{IN} = 4.0V			+200	μ A

DP7303/DP8303

DC Electrical Characteristics (cont'd.) (Notes 2 and 3)

T-52-31

Parameter	Conditions	Min	Typ	Max	Units
Control Inputs CD, T/R					
V _{IH} Logical "1" Input Voltage		2.0			V
V _{IL} Logical "0" Input Voltage	DP8303			0.8	V
	DP7303			0.7	V
I _{IH} Logical "1" Input Current	V _{IH} = 2.7V		0.5	20	μA
I _I Maximum Input Current	V _{CC} = max, V _{IH} = 5.25V			1.0	mA
I _{IL} Logical "0" Input Current	V _{IL} = 0.4V	T/R	-0.1	-0.25	mA
		CD	-0.25	-0.5	mA
V _{CLAMP} Input Clamp Voltage	I _{IN} = -12 mA		-0.8	-1.5	V
Power Supply Current					
I _{CC} Power Supply Current	CD = 2.0V = V _{IN} , V _{CC} = max		70	100	mA
	CD = 0.4V, V _{INA} = T/R = 2V, V _{CC} = max		100	150	mA

AC Electrical Characteristics V_{CC} = 5V, T_A = 25°C

Parameter	Conditions	Min	Typ	Max	Units
A Port Data/Mode Specifications					
t _{PDHLA} Propagation Delay to a Logical "0" from B Port to A Port	CD = 0.4V, T/R = 0.4V (figure A) R1 = 1k, R2 = 5k, C1 = 30 pF		8	12	ns
t _{PDLHA} Propagation Delay to a Logical "1" from B Port to A Port	CD = 0.4V, T/R = 0.4V (figure A) R1 = 1k, R2 = 5k, C1 = 30 pF		11	16	ns
t _{PLZA} Propagation Delay from a Logical "0" to TRI-STATE from CD to A Port	B0 to B7 = 2.4V, T/R = 0.4V (figure C) S3 = 1, R5 = 1k, C4 = 15 pF		10	15	ns
t _{PHZA} Propagation Delay from a Logical "1" to TRI-STATE from CD to A Port	B0 to B7 = 0.4V, T/R = 0.4V (figure C) S3 = 0, R5 = 1k, C4 = 15 pF		8	15	ns
t _{PZLA} Propagation Delay from TRI-STATE to a Logical "0" from CD to A Port	B0 to B7 = 2.4V, T/R = 0.4V (figure C) S3 = 1, R5 = 1k, C4 = 30 pF		20	30	ns
t _{PZHA} Propagation Delay from TRI-STATE to a Logical "1" from CD to A Port	B0 to B7 = 0.4V, T/R = 0.4V (figure C) S3 = 0, R5 = 5k, C4 = 30 pF		19	30	ns
B Port Data/Mode Specifications					
t _{PDHLB} Propagation Delay to a Logical "0" from A Port to B Port	CD = 0.4V, T/R = 2.4V (figure A) R1 = 100 Ω, R2 = 1k, C1 = 300 pF R1 = 667 Ω, R2 = 5k, C1 = 45 pF		12	18	ns
			7	12	ns
t _{PDLHB} Propagation Delay to a Logical "1" from A Port to B Port	CD = 0.4V, T/R = 2.4V (figure A) R1 = 100 Ω, R2 = 1k, C1 = 300 pF R1 = 667 Ω, R2 = 5k, C1 = 45 pF		15	20	ns
			9	14	ns
t _{PLZB} Propagation Delay from a Logical "0" to TRI-STATE from CD to B Port	A0 to A7 = 2.4V, T/R = 2.4V (figure C) S3 = 1, R5 = 1k, C4 = 15 pF		13	18	ns
t _{PHZB} Propagation Delay from a Logical "1" to TRI-STATE from CD to B Port	A0 to A7 = 0.4V, T/R = 2.4V (figure C) S3 = 0, R5 = 1k, C4 = 15 pF		8	15	ns
t _{PZLB} Propagation Delay from TRI-STATE to a Logical "0" from CD to B Port	A0 to A7 = 2.4V, T/R = 2.4V (figure C) S3 = 1, R5 = 100 Ω, C4 = 300 pF S3 = 1, R5 = 667 Ω, C4 = 45 pF		25	35	ns
			16	25	ns
t _{PZHB} Propagation Delay from TRI-STATE to a Logical "1" from CD to B Port	A0 to A7 = 0.4V, T/R = 2.4V (figure C) S3 = 0, R5 = 1k, C4 = 300 pF S3 = 0, R5 = 5k, C4 = 45 pF		22	35	ns
			14	25	ns

AC Electrical Characteristics (cont'd.)

 $V_{CC} = 5V, T_A = 25^\circ C$

T-52-31

Parameter	Conditions	Min	Typ	Max	Units
Transmit/Receive Mode Specifications					
t_{TRL}	Propagation Delay from Transmit Mode to Receive a Logical "0," T/ $\bar{R}$ to A Port CD = 0.4 V (figure B) S1 = 1, R4 = 100 Ω , C3 = 5 pF S2 = 1, R3 = 1k, C2 = 30 pF		23	35	ns
t_{TRH}	Propagation Delay from Transmit Mode to Receive a Logical "1," T/ $\bar{R}$ to A Port CD = 0.4 V (figure B) S1 = 0, R4 = 100 Ω , C3 = 5 pF S2 = 0, R3 = 5k, C2 = 30 pF		22	35	ns
t_{RTL}	Propagation Delay from Receive Mode to Transmit a Logical "0," T/ $\bar{R}$ to B Port CD = 0.4 V (figure B) S1 = 1, R4 = 100 Ω , C3 = 300 pF S2 = 1, R3 = 300 Ω , C2 = 5 pF		26	35	ns
t_{RTH}	Propagation Delay from Receive Mode to Transmit a Logical "1," T/ $\bar{R}$ to B Port CD = 0.4 V (figure B) S1 = 0, R4 = 1k, C3 = 300 pF S2 = 0, R3 = 300 Ω , C2 = 5 pF		27	35	ns



Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of "Electrical Characteristics" provide conditions for actual device operation.

Note 2: Unless otherwise specified, min/max limits apply across the supply and temperature range listed in the table of Recommended Operating Conditions. All typical values given are for $V_{CC} = 5V$ and $T_A = 25^\circ C$.

Note 3: All currents into device pins are positive; all currents out of device pins are negative. All voltages are referenced to ground unless otherwise specified.

Note 4: Only one output at a time should be shorted.

Switching Time Waveforms and AC Test Circuits

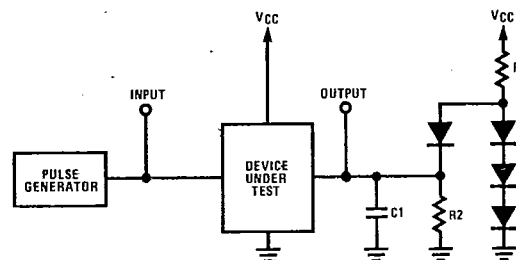
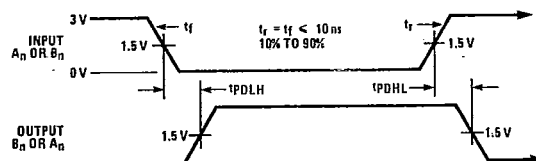


NOTE: C1 INCLUDES TEST FIXTURE CAPACITANCE.

FIGURE A. Propagation Delay from A Port to B Port or from B Port to A Port



DP7303/DP8303

Switching Time Waveforms and AC Test Circuits (cont'd.) T-52-31

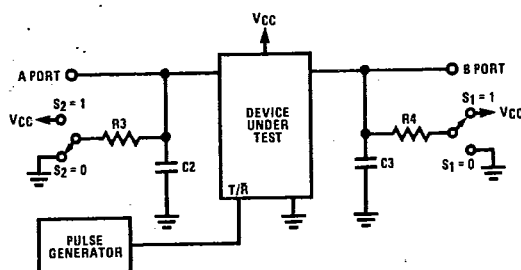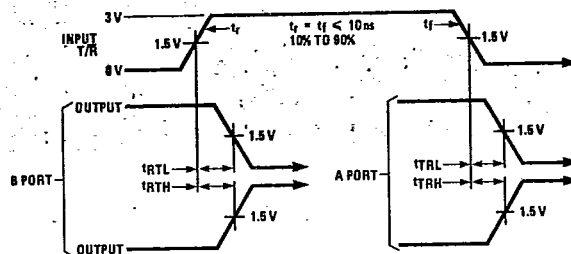

NOTE: C2 AND C3 INCLUDE TEST FIXTURE CAPACITANCE.

FIGURE B. Propagation Delay from T/R to A Port or B Port

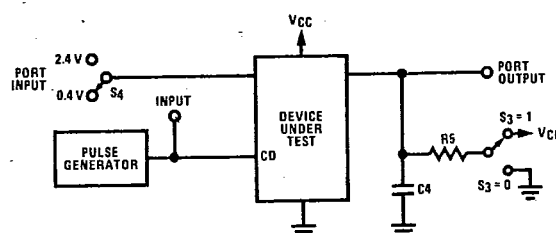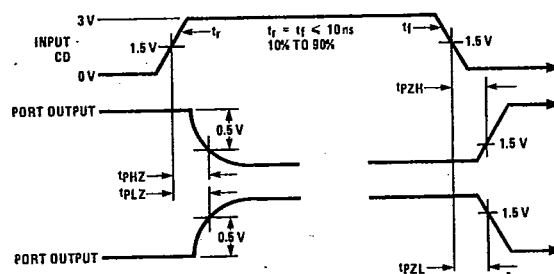

NOTE: C4 INCLUDES TEST FIXTURE CAPACITANCE.
PORT INPUT IS IN A FIXED LOGICAL
CONDITION. SEE AC TABLE.

FIGURE C. Propagation Delay to/from TRI-STATE® from CD to A Port or B Port