


Low Cost SMT Dual Band Diplexer 400-700/1100-1940 MHz



Features

- Small Size and Low Profile
- Industry Standard SOW-16 SMT Plastic Package
- Superior Repeatability
- Passbands 400-700 MHz and 1100-1940 MHz
- Typical Passband Insertion Loss: 0.5 dB
- 2 Watt Power Handling
- Low Cost

SOW-16

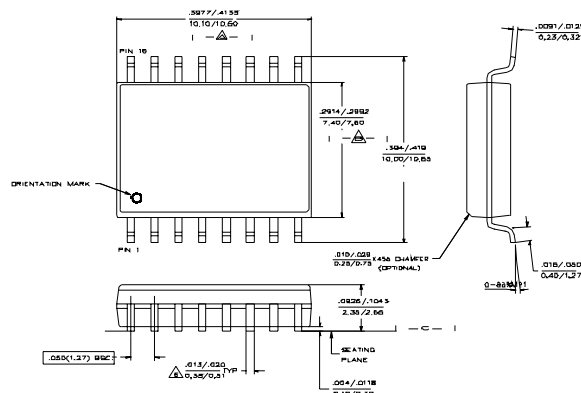

16-Lead SOP outline dimensions
Wide body (.300)
(All dimensions per JEDEC No. MS-013-AA, Issue C)
Dimensions in () are in mm.
Unless Otherwise Noted: .xxx = ± 0.010 (.xx = ± 0.25)
 xxx = ± 0.02 (xx = ± 0.5)

Description

M/A-COM's DP52-0004 is an IC-based monolithic Diplexer in a low cost SOW-16 plastic package. This Diplexer is ideally suited for applications where small size, low insertion loss, superior repeatability and low cost are required. Typical applications include WMT/PCS and dual mode portable devices.

The DP52-0004 is fabricated using a passive-integrated circuit process. The process features full-chip passivation for increased performance and reliability.

Ordering Information

Part Number	Package
DP52-0004	S0W-16 Lead Plastic Package
DP52-0004-TR	Forward Tape and Reel ¹

1. If specific reel size is required, consult factory for part number assignment.

400MHz/1100-1940MHz Typical Electrical Specifications¹, T_A = +25°C

Parameter	Units	Min	Typ	Max
Passband Insertion Loss	dB	—	1.8	2.8
Stopband Isolation	dB	21	30	—
Passband VSWR	—	—	1.88	2.06


1. All specifications apply with a 50-Ohm source and load impedance.

Absolute Maximum Ratings¹


Parameter	Absolute Maximum
Input Power	2 W CW
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

1. Exceeding these limits may cause permanent damage.

Functional Diagram

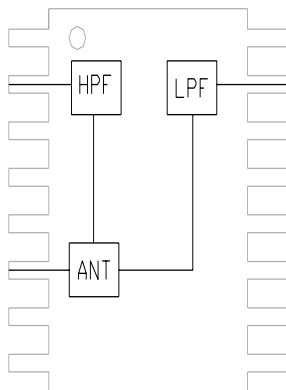


Recommended PCB Configuration

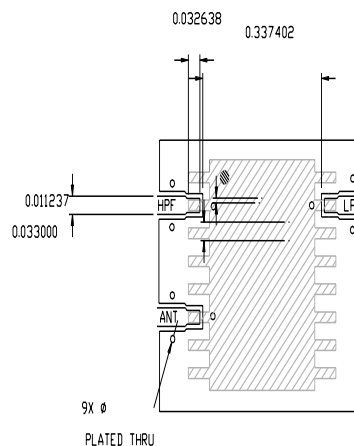


DP52-0004-G PCB LAYOUT (SDIC-16 CASE)
SCALE: 1X
CIRCUIT MATERIAL: FR4, .028 THICK
ALL PORTS ARE 50 OHMS

Typical Performance @ +25°C

Insertion Loss vs Frequency

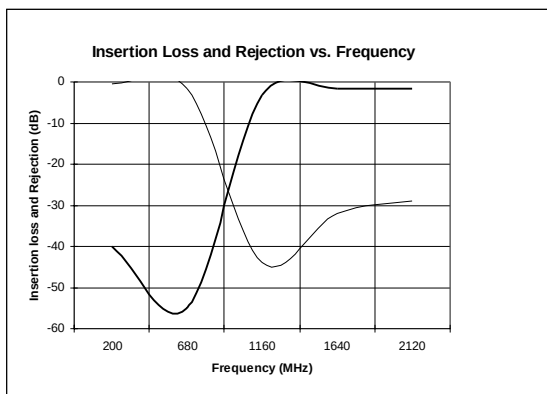

VSWR vs Frequency

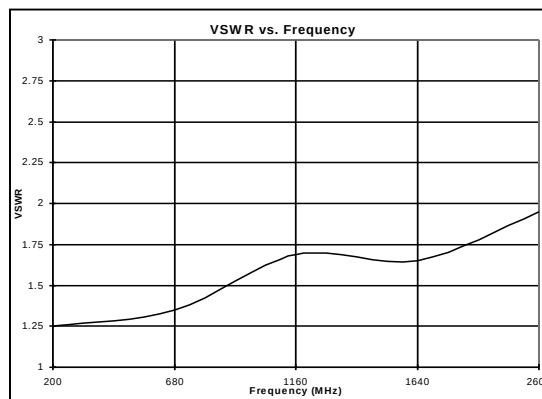

V1.00



www.macom.com

M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel. +85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax +44 (1344) 300 020

AMP and Connecting at a Higher Level are trademarks.
Specifications subject to change without notice.

