



9312/DM9312 One of Eight Line Data Selectors/Multiplexers

General Description


These data selectors/multiplexers contain inverter/drivers to supply full complementary, on-chip, binary decoded data selection.

The 9312 is a single 8-bit multiplexer with complementary outputs and a strobe control. When the strobe is low, the function is enabled. When a high logic level is applied to the strobe, the output is forced to the logic zero state regardless of the logic level of the data inputs.

Features

- Selects one-of-eight data sources
- Performs parallel to serial conversion
- Strobe controlled outputs
- Complementary outputs

Connection Diagram

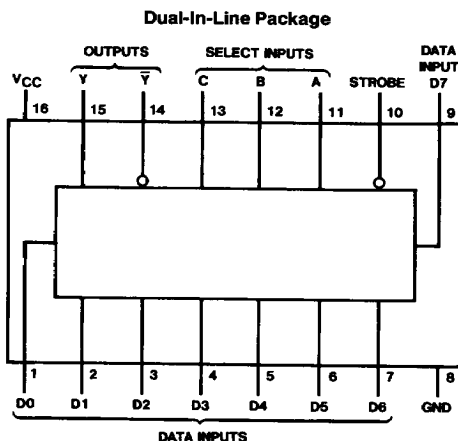

TL/F/6605-1

Order Number 9312DMQB, 9312FMQB or DM9312N
See NS Package Number J16A, N16E or W16A

Function Table

Inputs				Outputs	
Select			Strobe	Y	Ȳ
C	B	A	G		
X	X	X	H	L	H
L	L	L	L	D0	D0̄
L	L	H	L	D1	D1̄
L	H	L	L	D2	D2̄
L	H	H	L	D3	D3̄
H	L	L	L	D4	D4̄
H	L	H	L	D5	D5̄
H	H	L	L	D6	D6̄
H	H	H	L	D7	D7̄

H = High Level, L = Low Level, X = Don't Care.
D0, D1 ... D7 = The level of the respective D input.

Absolute Maximum Ratings (Note)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input Voltage	5.5V
Operating Free Air Temperature Range	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Storage Temperature Range	−65°C to +150°C

Note: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Recommended Operating Conditions

Symbol	Parameter	Military			Commercial			Units
		Min	Nom	Max	Min	Nom	Max	
V _{CC}	Supply Voltage	4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High Level Input Voltage	2			2			V
V _{IL}	Low Level Input Voltage			0.8			0.8	V
I _{OH}	High Level Output Current			−0.8			−0.8	mA
I _{OL}	Low Level Output Current			16			16	mA
T _A	Free Air Operating Temperature	−55		125	0		70	°C

Electrical Characteristics over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 1)	Max	Units
V _I	Input Clamp Voltage	V _{CC} = Min, I _I = −12 mA			−1.5	V
V _{OH}	High Level Output Voltage	V _{CC} = Min, I _{OH} = Max V _{IL} = Max, V _{IH} = Min	2.4	3.4		V
V _{OL}	Low Level Output Voltage	V _{CC} = Min, I _{OL} = Max V _{IH} = Min, V _{IL} = Max		0.2	0.4	V
I _I	Input Current @ Max Input Voltage	V _{CC} = Max, V _I = 5.5V			1	mA
I _{IH}	High Level Input Current	V _{CC} = Max, V _I = 2.4V			40	μA
I _{IL}	Low Level Input Current	V _{CC} = Max, V _I = 0.4V			−1.6	mA
I _{OS}	Short Circuit Output Current	V _{CC} = Max (Note 2)	MIL −20 COM −30		−70 −85	mA
I _{CC}	Supply Current	V _{CC} = Max, (Note 3)		27	44	mA

Note 1: All typicals are at V_{CC} = 5V, T_A = 25°C.

Note 2: Not more than one output should be shorted at a time.


Note 3: I_{CC} is measured with the STROBE and DATA SELECT inputs 4.5V and all other inputs and outputs open.

Switching Characteristics at $V_{CC} = 5V$ and $T_A = 25^\circ C$ (See Section 1 for Test Waveforms and Output Load)

Symbol	Parameter	From (Input) To (Output)	Military		Commercial		Units
			$R_L = 400\Omega, C_L = 15\text{ pF}$				
			Min	Max	Min	Max	
t _{PLH}	Propagation Delay Time Low to High Level Output	Select to Y		34		33	ns
t _{PHL}	Propagation Delay Time High to Low Level Output	Select to Y		34		35	ns
t _{PLH}	Propagation Delay Time Low to High Level Output	Select to $\bar{Y}$		24		28	ns
t _{PHL}	Propagation Delay Time High to Low Level Output	Select to $\bar{Y}$		26		25	ns
t _{PLH}	Propagation Delay Time Low to High Level Output	Data to Y		24		23	ns
t _{PHL}	Propagation Delay Time High to Low Level Output	Data to Y		24		25	ns
t _{PLH}	Propagation Delay Time Low to High Level Output	Data to $\bar{Y}$		14		13	ns
t _{PHL}	Propagation Delay Time High to Low Level Output	Data to $\bar{Y}$		16		13	ns
t _{PLH}	Propagation Delay Time Low to High Level Output	Strobe to Y		30		33	ns
t _{PHL}	Propagation Delay Time High to Low Level Output	Strobe to Y		30		32	ns
t _{PLH}	Propagation Delay Time Low to High Level Output	Strobe to $\bar{Y}$		20		19	ns
t _{PHL}	Propagation Delay Time High to Low Level Output	Strobe to $\bar{Y}$		23		21	ns

Logic Diagram

9312

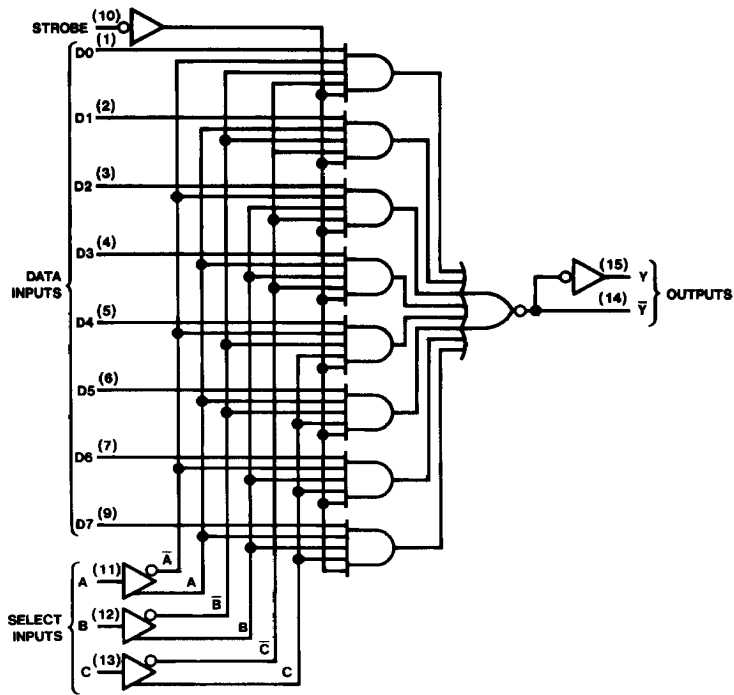

TL/F/6605-2