

MAXIM

Quad SPST CMOS Analog Switches

General Description

The MAX331, DG201A and DG211 are normally closed, quad single-pole-single-throw (SPST) analog switches. These CMOS switches can be continuously operated with power supplies ranging from $\pm 4.5V$ to $\pm 18V$. Maxim guarantees that these switches will not latch-up if the power supplies are disconnected with input signals still connected.


All three devices have guaranteed break-before-make switching. The MAX331 and DG201A differ with the DG211 primarily in switching speeds. The MAX331 and DG201A have a maximum turn-off time of 450ns and a maximum turn-on time of 600ns. The DG211 has a maximum turn-off time of 500ns and a maximum turn-on time of 1000ns.

Compared to the original manufacturer's products, Maxim's DG201A and DG211 consume significantly lower power, making them better suited for portable applications. By specifying the MAX331, the customer is guaranteed low power consumption units. Maxim has also eliminated the need for the third (V_L) power supply that is required for the operation of the original manufacturer's DG211.

Applications

Winchester Disk Drives
Test Equipment
Communications Systems
PBX, PABX
Guidance and Control Systems
Head up Displays
Military Radios

Typical Operating Circuit

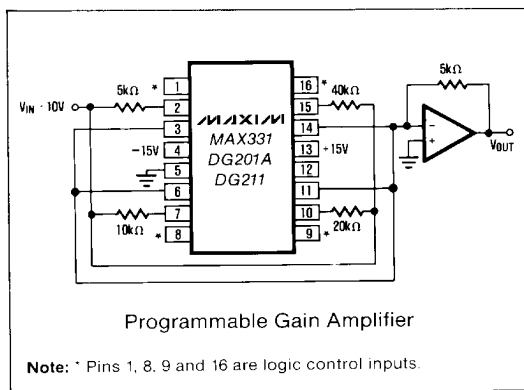

Features


- ◆ Improved 2nd Source! (See pages 3 and 5 for "MAXIM Advantage™")
- ◆ Guaranteed $\pm 4.5V$ to $\pm 18V$ Operation
- ◆ No V_L Supply Required
- ◆ Non-Latching with Supplies Turned-off and Input Signals Present
- ◆ CMOS and TTL Logic Compatible
- ◆ Monolithic, Low Power CMOS Design

Ordering Information

PART	TEMP. RANGE	PACKAGE
MAX331MJE	-55°C to +125°C	16 Lead Cerdip
DG201AAK	-55°C to +125°C	16 Lead Cerdip
DG201ABK	-25°C to +85°C	16 Lead Cerdip
DG201ACK	0°C to +70°C	16 Lead Cerdip
DG201ACJ	0°C to +70°C	16 Lead Plastic DIP
DG201ACSE	0°C to +70°C	16 Lead Small Outline
DG201C/D	0°C to +70°C	Dice
DG211CJ	0°C to +70°C	16 Lead Plastic DIP
DG211CSE	0°C to +70°C	16 Lead Small Outline
DG211C/D	0°C to +70°C	Dice

Pin Configuration

Top View



LOGIC	SWITCH
0	ON
1	OFF

Note: * Pin 12 can be left open or connected to a logic supply voltage.

MAXIM

Maxim Integrated Products 1

Call toll free 1-800-998-8800 for free samples or literature.

MAX331/DG201A/DG211

Quad SPST CMOS Analog Switches

ABSOLUTE MAXIMUM RATINGS (DG211)

V^+ to V^-	40V
V_{IN} to Ground	V^- , V^+
V_I to Ground	-0.3V, 25V
V_S or V_D to V^+	0, -40V
V_S or V_D to V^-	0, 40V
V^+ to Ground	25V
V^- to Ground	-25V
Current, Any Terminal Except S or D	30mA
Continuous Current, S or D	20mA
Peak Current, S or D (Pulsed at 1msec, 10% duty cycle max)	70mA

Storage Temperature	-65°C to +125°C
Operating Temperature	0°C to +70°C
Power Dissipation (Note 1)	
16 Pin Plastic DIP (Note 2)	470mW
16 Pin Small Outline (SE) (Note 3)	400mW

Note 1: Device mounted with all leads soldered to PC board.

Note 2: Derate 6.5mW/°C above +25°C.

Note 3: Derate 7mW/°C above +25°C.

Stresses listed under "Absolute Maximum Ratings" may be applied (one at a time) to devices without resulting in permanent damage. These are stress ratings only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum ratings conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS (DG211)

($V^+ = +15V$, $V^- = -15V$, GND = 0V, $T_A = +25^\circ\text{C}$, unless otherwise noted)

	PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
				MIN (Note 4)	TYP (Note 5)	MAX	
SWITCH	Analog Signal Range	V_{ANALOG}		-15		15	V
	Drain-Source ON Resistance	$r_{DS(on)}$	$V_D = \pm 10V$, $V_{IN} = 0.8V$, $I_S = 1mA$		115	175	Ω
	Source OFF Leakage Current	$I_{S(off)}$	$V_{IN} = 2.4V$ $V_S = 14V$, $V_D = -14V$ $V_S = -14V$, $V_D = 14V$		0.01 -0.02	5.0	nA
	Drain OFF Leakage Current	$I_{D(off)}$	$V_{IN} = 2.4V$ $V_S = 14V$, $V_D = -14V$ $V_S = -14V$, $V_D = 14V$		0.01 -0.02	5.0	
	Drain ON Leakage Current (Note 6)	$I_{D(on)}$	$V_S = V_D = 14V$, $V_{IN} = 0.8V$ $V_S = V_D = -14V$, $V_{IN} = 0.8V$		0.1 -0.15	5.0	
INPUT	Input Current With Input Voltage High	I_{INH}	$V_{IN} = 2.4V$ $V_{IN} = 15V$	-1.0	-0.0004		μA
	Input Current With Input Voltage Low	I_{INL}	$V_{IN} = 0V$	-1.0	-0.0004	1.0	
DYNAMIC	Turn-ON Time	t_{on}	See Switching Time Test Circuit $V_S = 2V$, $R_L = 1k\Omega$, $C_L = 35pF$		460	1000	ns
	Turn-OFF Time	t_{off1}			360	500	
		t_{off2}			450		
	Source OFF Capacitance	$C_{S(off)}$	$V_S = 0V$, $V_{IN} = 5V$, $f = 1MHz$		5		pF
	Drain OFF Capacitance	$C_{D(off)}$	$V_D = 0V$, $V_{IN} = 5V$, $f = 1MHz$		5		
	Channel ON Capacitance	$C_{D-S(on)}$	$V_D = V_S = 0V$, $V_{IN} = 0V$, $f = 1MHz$		16		dB
SUPPLY	OFF Isolation (Note 7)	OIRR	$V_{IN} = 5V$, $R_L = 1k\Omega$, $C_L = 15pF$, $V_S = 1VRMS$, $f = 100kHz$		70		
	Crosstalk (Channel to Channel)	CCRR			90		
	Positive Supply Current	I^+			0.35	0.48	mA
	Negative Supply Current	I^-			0.30	0.48	
	Logic Supply Current	I_L	$V_{IN} = 0V$ and $2.4V$		0.5	1.2	

Note 4: The algebraic convention whereby the most negative value is a minimum, and the most positive is a maximum, is used in this data sheet.

Note 5: Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

Note 6: $I_{D(on)}$ is leakage from driver into "ON" switch.

Note 7: OFF Isolation = $20 \log \frac{V_S}{V_D}$, V_S = input to OFF switch, V_D = output.

The electrical characteristics above are a reproduction of a portion of Siliconix's copyrighted 1985 data book. This information does not constitute any representation by Maxim that Siliconix's products will perform in accordance with these specifications. The "Electrical Characteristics Table" along with descriptive excerpts from the original manufacturer's data sheet have been included in this data sheet solely for comparative purposes.



Quad SPST CMOS Analog Switches

◆ Significantly Reduced Power Consumption

◆ Third (Logic) Supply Not Required

◆ Fault Protected

ABSOLUTE MAXIMUM RATINGS (DG211) This device conforms to the Absolute Maximum Ratings on the adjacent page.

ELECTRICAL CHARACTERISTICS (DG211): Specifications below satisfy or exceed all "tested" parameters on adjacent page.

($V^+ = +15V$, $V^- = -15V$, GND = 0V, $T_A = +25^\circ C$, unless otherwise noted)

	PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
				MIN (Note 4)	TYP (Note 5)	MAX	
SWITCH	Analog Signal Range	V_{ANALOG}		-15		15	V
	Drain-Source ON Resistance	$r_{DS(on)}$	$V_D = \pm 10V$, $V_{IN} = 0.8V$, $I_S = 1mA$		115	175	Ω
	Source OFF Leakage Current	$I_{S(off)}$	$V_{IN} = 2.4V$ $V_S = 14V$, $V_D = -14V$ $V_S = -14V$, $V_D = 14V$		0.01 -5.0	5.0 -0.02	nA
	Drain OFF Leakage Current	$I_{D(off)}$	$V_{IN} = 2.4V$ $V_S = 14V$, $V_D = -14V$ $V_S = -14V$, $V_D = 14V$		0.01 -5.0	5.0 -0.02	
	Drain ON Leakage Current (Note 6)	$I_{D(on)}$	$V_S = V_D = 14V$, $V_{IN} = 0.8V$		0.1	5.0	
			$V_S = V_D = -14V$, $V_{IN} = 0.8V$		-5.0	-0.15	
INPUT	Input Current With Input Voltage High	I_{INH}	$V_{IN} = 2.4V$ $V_{IN} = 15V$	-1.0	-0.0004		μA
	Input Current With Input Voltage Low	I_{INL}	$V_{IN} = 0V$	-1.0	-0.0004	1.0	
DYNAMIC	Turn-ON Time	t_{on}	See Switching Time Test Circuit $V_S = 2V$, $R_L = 1k\Omega$, $C_L = 35pF$		460	1000	ns
	Turn-OFF Time	t_{off1}			360	500	
		t_{off2}			450		
	Source OFF Capacitance	$C_{S(off)}$	$V_S = 0V$, $V_{IN} = 5V$, $f = 1MHz$		5		pF
	Drain OFF Capacitance	$C_{D(off)}$	$V_D = 0V$, $V_{IN} = 5V$, $f = 1MHz$		5		
	Channel ON Capacitance	$C_{D+S(on)}$	$V_D = V_S = 0V$, $V_{IN} = 0V$, $f = 1MHz$		16		dB
	OFF Isolation (Note 8)	OIRR	$V_{IN} = 5V$, $R_L = 1k\Omega$, $C_L = 15pF$, $V_S = 1VRMS$, $f = 100kHz$		70		
	Crosstalk (Channel to Channel)	CCRR			90		
SUPPLY	Positive Supply Current	I^+	$V_{IN} = 0V$ and $2.4V$		0.02	0.1	mA
	Negative Supply Current	I^-			0.01	0.1	
	Logic Supply Current	I_L			0.0	0.0	
	Power Supply Range for Continuous Operation	V_{OP}		± 4.5		± 18	V

Note 8: Electrical characteristics, such as ON Resistance, will change when power supplies, other than $\pm 15V$, are used.

MAX331/DG201A/DG211

Quad SPST CMOS Analog Switches

ABSOLUTE MAXIMUM RATINGS (MAX331, DG201A)

Voltages Referenced to V ⁻	Storage Temperature	-65°C to +150°C
V ⁺	Power Dissipation (Note 2)	
GND	16 Pin CERDIP (Note 3)	900mW
Digital Inputs (Note 1), V _S , V _D	16 Pin Plastic DIP (Note 4)	470mW
or 20mA, whichever occurs first	16 Pin Small Outline (SE) (Note 5)	400mW
Current, Any Terminal Except S or D		
Continuous Current, S or D		
Peak Current, S or D		
(Pulsed at 1msec, 10% duty cycle max.)		
Operating Temperature		
DG201A (A Suffix)		
(B Suffix)		
(C Suffix)		
MAX331MJE		

Stresses listed under "Absolute Maximum Ratings" may be applied (one at a time) to devices without resulting in permanent damage. These are stress ratings only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum ratings conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS (DG201A)

(V⁺ = +15V, V⁻ = -15V, GND = 0V, T_A = +25°C, unless otherwise noted)

	PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS						UNITS	
				DG201AA			DG201AB,C				
				MIN (Note 6)	TYP (Note 7)	MAX	MIN (Note 6)	TYP (Note 7)	MAX		
SWITCH	Analog Signal Range	V _{ANALOG}			-15		15	-15		15	V
	Drain-Source ON Resistance	r _{DS (on)}	V _D = ±10V, V _{IN} = 0.8V, I _S = 1mA			115	175		115	200	Ω
	Source OFF Leakage Current	I _{S (off)}	V _{IN} = 2.4V	V _S = 14V, V _D = -14V V _S = -14V, V _D = 14V	0.01	1.0		0.01	5.0	nA	
	Drain OFF Leakage Current	I _{D (off)}	V _{IN} = 2.4V	V _S = 14V, V _D = -14V V _S = -14V, V _D = 14V	0.01	1.0		0.01	5.0		
	Drain ON Leakage Current (Note 8)	I _{D (on)}	V _S = -14V, V _{IN} = 0.8V V _D = 14V, V _{IN} = 0.8V	0.1	1.0		0.1	5.0			
INPUT	Input Current With Input Voltage High	I _{INH}	V _{IN} = 2.4V V _{IN} = 15V	-1.0	-0.0004		-1.0	-0.0004		μA	
	Input Current With Input Voltage Low	I _{INL}	V _{IN} = 0V	-1.0	-0.0004		-1.0	-0.0004			
DYNAMIC	Turn-ON Time	t _{on}	See Switching Time Test Circuit	480	600		480	600		ns	
	Turn-OFF Time	t _{off1}		370	450		370	450			
	Charge Injection	Q	C _L = 1000pF, V _{GEN} = 0V, R _{GEN} = 0Ω		20		20		pC		
	Source OFF Capacitance	C _{S (off)}	V _S = 0V, V _{IN} = 5V f = 140kHz	5		5		pF			
	Drain OFF Capacitance	C _{D (off)}		5		5					
	Channel ON Capacitance	C _{D (on)} + C _{S (on)}	V _D = V _S = 0V, V _{IN} = 0V	16		16					
	OFF Isolation		V _{IN} = 5V, Z _L = 75Ω	70		70		dB			
Crosstalk (Channel to Channel)		V _S = 2.0V, f = 100kHz	90		90						
SUP-PLY	Positive Supply Current	I ⁺	All Channels ON or OFF	0.9	2		0.9	2	mA		
	Negative Supply Current	I ⁻		-1	-0.3		-1	-0.3			

Note 6: The algebraic convention whereby the most negative value is a minimum, and the most positive is a maximum, is used in this data sheet.

Note 7: Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

Note 8: I_{D(on)} is leakage from driver into "ON" switch.

The electrical characteristics above are a reproduction of a portion of Siliconix's copyrighted 1985 data book. This information does not constitute any representation by Maxim that Siliconix's products will perform in accordance with these specifications. The "Electrical Characteristics Table" along with descriptive excerpts from the original manufacturer's data sheet have been included in this data sheet solely for comparative purposes.



Quad SPST CMOS Analog Switches

- ◆ Significantly Reduced Power Consumption
- ◆ Lower Input Current Over Temperature
- ◆ No Input Current Spike

ABSOLUTE MAXIMUM RATINGS (MAX331, DG201A) This device conforms to the Absolute Maximum Ratings on the adjacent page.

ELECTRICAL CHARACTERISTICS (MAX331, DG201A): Specifications below satisfy or exceed all "tested" parameters on adjacent page.

(V⁺ = +15V, V⁻ = -15V, GND = 0V, T_A = +25°C, unless otherwise noted)

	PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS						UNITS		
				MAX331/DG201AA			DG201AB,C					
				MIN (Note 6)	TYP (Note 7)	MAX	MIN (Note 8)	TYP (Note 7)	MAX			
SWITCH	Analog Signal Range	V _{ANALOG}				-15		15	-15		15	V
	Drain-Source ON Resistance (Note 9)	r _{DS(on)}	V _D = ±10V, V _{IN} = 0.8V, I _S = 1mA				115	175		115	200	Ω
	Source OFF Leakage Current	I _{S(off)}	V _{IN} = 2.4V	V _S = 14V, V _D = -14V V _S = -14V, V _D = 14V		-1.0	-0.02		-5.0	-0.02		nA
	Drain OFF Leakage Current	I _{D(off)}	V _{IN} = 2.4V	V _S = 14V, V _D = -14V V _S = -14V, V _D = 14V		-1.0	-0.02		-5.0	-0.02		
	Drain ON Leakage Current (Note 8)	I _{D(on)}	V _S = -14V, V _{IN} = 0.8V V _D = 14V, V _{IN} = 0.8V		-1.0	-0.15		-5.0	-0.15			
INPUT	Input Current With Input Voltage High	I _{INH}	V _{IN} = 2.4V V _{IN} = 15V		-1.0	-0.0004		-1.0	-0.0004		μA	
	Input Current With Input Voltage Low	I _{INL}	V _{IN} = 0V		-1.0	-0.0004		-1.0	-0.0004			
DYNAMIC	Turn-ON Time	t _{on}	See Switching Time Test Circuit			480	600		480	600	ns	
	Turn-OFF Time	t _{off1}				370	450		370	450		
	Charge Injection	Q	C _L = 1000pF, V _{GEN} = 0V, R _{GEN} = 0Ω				20		20	pC		
	Source OFF Capacitance	C _{S(off)}	V _S = 0V, V _{IN} = 5V			5		5		pF		
	Drain OFF Capacitance	C _{D(off)}	f = 140kHz			5		5				
	Channel ON Capacitance	C _{D(on)} + C _{S(on)}			V _D = V _S = 0V, V _{IN} = 0V			16			16	
	OFF Isolation		V _{IN} = 5V, Z _L = 75Ω				70		70		dB	
Crosstalk (Channel to Channel)		V _S = 2.0V, f = 100kHz				90		90				
SUPPLY	Positive Supply Current	I ⁺	All Channels ON or OFF			0.02	0.1		0.02	0.1	mA	
	Negative Supply Current	I ⁻	All Channels ON or OFF			-0.1	-0.01		-0.1	-0.01		
	Power Supply Range for Continuous Operation	V _{OP}				±4.5		±18	±4.5		±18	V

Note 6: The algebraic convention whereby the most negative value is a minimum, and the most positive is a maximum, is used in this data sheet.

Note 7: Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

Note 8: I_{D(on)} is leakage from driver into "ON" switch.

Note 9: Electrical characteristics, such as ON Resistance, will change when power supplies other than ±15V, are used.

MAX331/DG201A/DG211



Quad SPST CMOS Analog Switches

ELECTRICAL CHARACTERISTICS (DG201A) (V⁺ = +15V, V⁻ = -15V, GND = 0V, T_A = Full Operating Temperature Range)

	PARAMETER	SYMBOL	TEST CONDITIONS		LIMITS						UNITS
					DG201AA			DG201AB,C			
					MIN	TYP	MAX	MIN	TYP	MAX	
					(Note 6)	(Note 7)		(Note 6)	(Note 7)		
SWITCH	Analog Signal Range	V _{ANALOG}			-15		15	-15		15	V
	Drain-Source ON Resistance	r _{DS(on)}	V _D = ±10V, V _{IN} = 0.8V, I _S = 1mA				250			250	Ω
	Source OFF Leakage Current	I _{S(off)}	V _{IN} = 2.4V	V _S = 14V, V _D = -14V			100			100	nA
			V _S = -14V, V _D = 14V	-100			-100				
	Drain OFF Leakage Current	I _{D(off)}	V _{IN} = 2.4V	V _S = 14V, V _D = -14V			100			100	
			V _S = -14V, V _D = 14V	-100			-100				
Drain ON Leakage Current (Note 10)	I _{D(on)}	V _S = -14V, V _{IN} = 0.8V				200			200		
		V _D = 14V, V _{IN} = 0.8V		-200			-200				
INPUT	Input Current With Input Voltage High	I _{INH}	V _{IN} = 2.4V		-1.0			-10			μA
			V _{IN} = 15V				-10			-10	
	Input Current With Input Voltage Low	I _{INL}	V _{IN} = 0V		-10			-10			


Note 10: I_{D(on)} is leakage from driver into "ON" switch.

The electrical characteristics above are a reproduction of a portion of Siliconix's copyrighted 1985 data book. This information does not constitute any representation by Maxim that Siliconix's products will perform in accordance with these specifications. The "Electrical Characteristics Table" along with descriptive excerpts from the original manufacturer's data sheet have been included in this data sheet solely for comparative purposes.

Switching Time Test Circuit

Switch output waveform shown for V_S = constant with logic input waveform as shown. Note that V_S may be +ve or -ve as per switching times test circuit.

V_O is the steady state output with switch on. Feed-through via gate capacitance may result in spikes at leading and trailing edge of output waveform.

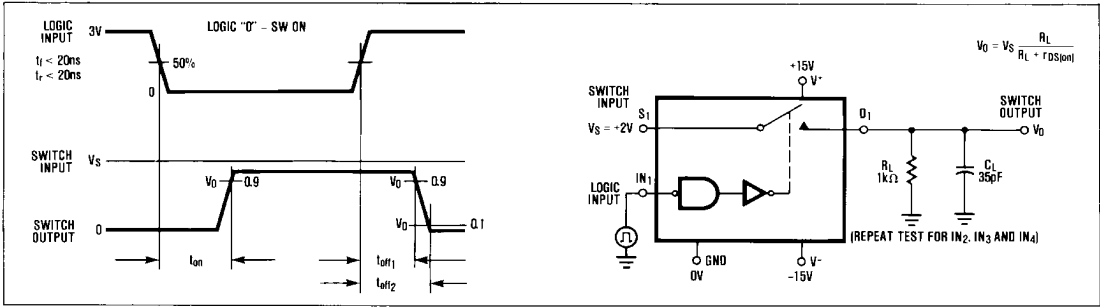

Typical R_{DS(ON)} vs. Power Supplies for Maxim's MAX331, DG201A and DG211

POWER SUPPLIES	R _{DS(ON)} AT ANALOG SIGNAL LEVEL					
	-5V	+5V	-10V	+10V	-15V	+15V
±5V	350Ω	380Ω				
±10V			165Ω	250Ω		
±15V			125Ω	160Ω	135Ω	155Ω



Quad SPST CMOS Analog Switches

ELECTRICAL CHARACTERISTICS (MAX331, DG201A):

($V^+ = +15V$, $V^- = -15V$, $GND = 0V$, T_A = full operating temperature range)

	PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS						UNITS
				MAX331/DG201AA			DG201AB,C			
				MIN	TYP	MAX	MIN	TYP	MAX	
				(Note 6)	(Note 7)		(Note 6)	(Note 7)		
SWITCH	Analog Signal Range	V _{ANALOG}				-15		15		V
	Drain-Source ON Resistance (Note 11)	r _{DS (on)}	V _D = ±10V, V _{IN} = 0.8V, I _S = 1mA			250			250	Ω
	Source OFF Leakage Current	I _{S (off)}	V _{IN} = 2.4V	V _S = 14V, V _D = -14V		100			100	nA
			V _S = -14V, V _D = 14V		-100			-100		
	Drain OFF Leakage Current	I _{D (off)}	V _{IN} = 2.4V	V _S = 14V, V _D = -14V		100			100	
			V _S = -14V, V _D = 14V		-100			-100		
Drain ON Leakage Current (Note 10)	I _{D (on)}	V _S = -14V, V _{IN} = 0.8V			200			200		
			V _D = 14V, V _{IN} = 0.8V			-200			-200	
INPUT	Input Current With Input Voltage High	I _{INH}	V _{IN} = 2.4V			-1.0			-1.0	μA
			V _{IN} = 15V			1.0			1.0	
	Input Current With Input Voltage Low	I _{INL}	V _{IN} = 0V			-1.0			-1.0	

Note 10: $I_{D(on)}$ is leakage from driver into "ON" switch.

Note 11: Electrical characteristics, such as ON Resistance, will change when power supplies other than $\pm 15V$, are used.

Protecting Against Fault Conditions

Fault conditions occur when power supplies are turned off when input signals are still present or when over voltages occur at the inputs during normal operation. In either case, source-to-body diodes can be forward biased and conduct current from the signal source. If this current is required to be kept to low (μA) levels then the addition of external protection diodes is recommended.

To provide protection for over-voltages up to 20V above the supplies, a 1N4001 or 1N914 type diode should be placed in series with the positive and negative supplies as shown in Fig. 1. The addition of these diodes will reduce the analog signal range to 1 volt below the positive supply and 1 volt above the negative supply.


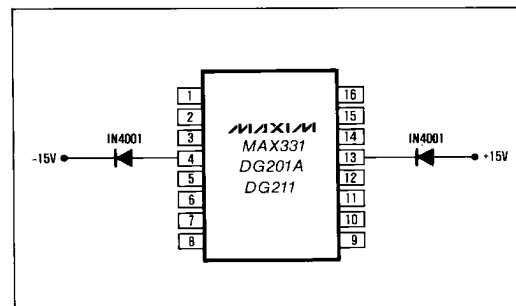


Figure 1. Protection Against Fault Conditions


Quad SPST CMOS Analog Switches

MAX331/DG201A/DG211

Chip Topography

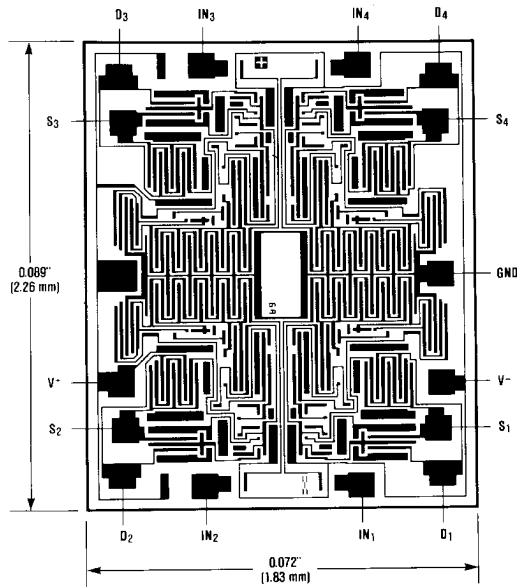


Package Information

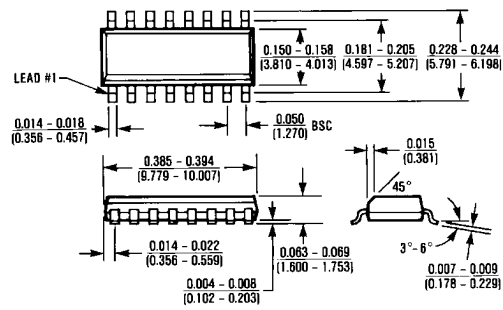


16 Lead Small Outline (SE)

$\theta_{JA} = 110^{\circ}\text{C/W}$
 $\theta_{JC} = 60^{\circ}\text{C/W}$

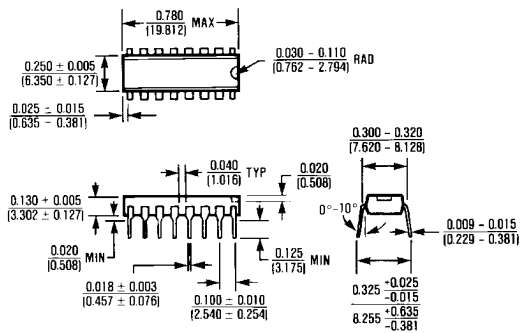

16 Lead Plastic DIP

$\theta_{JA} = 135^{\circ}\text{C/W}$
 $\theta_{JC} = 65^{\circ}\text{C/W}$

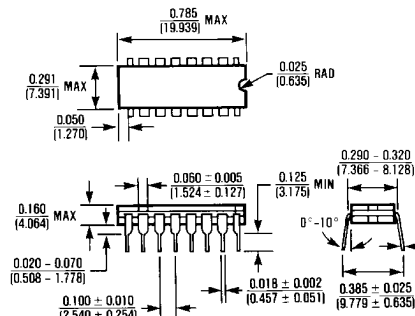

16 Lead CERP

$\theta_{JA} = 100^{\circ}\text{C/W}$
 $\theta_{JC} = 60^{\circ}\text{C/W}$

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

© 1995 Maxim Integrated Products

Printed USA

MAXIM is a registered trademark of Maxim Integrated Products.