

## LM2936 Ultra-Low Quiescent Current 5V Regulator


### General Description

The LM2936 ultra-low quiescent current regulator features low dropout voltage and low current in the standby mode. With less than 15  $\mu\text{A}$  quiescent current at a 100  $\mu\text{A}$  load, the LM2936 is ideally suited for automotive and other battery operated systems. The LM2936 retains all of the features that are common to low dropout regulators including a low dropout PNP pass device, short circuit protection, reverse battery protection, and thermal shutdown. The LM2936 has a 40V operating voltage limit,  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  operating temperature range, and  $\pm 3\%$  output voltage tolerance over the entire output current, input voltage, and temperature range. The LM2936 is available in both a TO-92 package and an 8-pin surface mount package with a fixed 5V output.

### Features

- Ultra low quiescent current ( $I_Q \leq 15 \mu\text{A}$  for  $I_O \leq 100 \mu\text{A}$ )
- Fixed 5V, 50 mA output
- Output tolerance  $\pm 3\%$  over line, load, and temperature
- Dropout voltage typically 200 mV @  $I_O = 50 \text{ mA}$
- Reverse battery protection
- $-50\text{V}$  reverse transient protection
- Internal short circuit current limit
- Internal thermal shutdown protection
- 40V operating voltage limit

### Typical Application

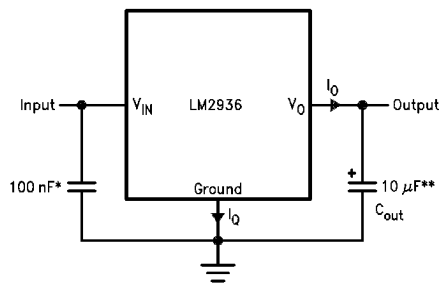


DS009759-1

\* Required if regulator is located more than 2" from power supply filter capacitor.

\*\* Required for stability. Must be rated for 10  $\mu\text{F}$  minimum over intended operating temperature range. Effective series resistance (ESR) is critical, see curve. Locate capacitor as close as possible to the regulator output and ground pins. Capacitance may be increased without bound.

### Connection Diagrams


#### TO-92 Plastic Package (Z)



DS009759-2

**Bottom View**  
Order Number LM2936Z-5.0  
See NS Package Number Z03A

#### 8-Pin SO (M)



DS009759-6

**Top View**  
Order Number LM2936M-5.0  
See NS Package Number M08A

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|                                     |                    |
|-------------------------------------|--------------------|
| Input Voltage (Survival)            | +60V, -50V         |
| ESD Susceptibility (Note 2)         | 1900V              |
| Power Dissipation (Note 3)          | Internally limited |
| Junction Temperature ( $T_{Jmax}$ ) | 150°C              |

|                                          |                 |
|------------------------------------------|-----------------|
| Storage Temperature Range                | -65°C to +150°C |
| Lead Temperature<br>(Soldering, 10 sec.) | 260°C           |

## Operating Ratings

|                                     |                 |
|-------------------------------------|-----------------|
| Operating Temperature Range         | -40°C to +125°C |
| Maximum Input Voltage (Operational) | 40V             |

## Electrical Characteristics

$V_{IN} = 14V$ ,  $I_O = 10\text{ mA}$ ,  $T_J = 25^\circ\text{C}$ , unless otherwise specified. **Boldface** limits apply over entire operating temperature range

| Parameter                                     | Conditions                                                             | Typical<br>(Note 4) | Tested<br>Limit<br>(Note 5) | Units               |
|-----------------------------------------------|------------------------------------------------------------------------|---------------------|-----------------------------|---------------------|
| Output Voltage                                | $5.5V \leq V_{IN} \leq 26V$ ,<br>$I_O \leq 50\text{ mA}$ (Note 6)      |                     | <b>4.85</b>                 | $V_{min}$           |
|                                               |                                                                        | 5                   |                             | V                   |
|                                               |                                                                        |                     | <b>5.15</b>                 | $V_{max}$           |
| Line Regulation                               | $9V \leq V_{IN} \leq 16V$                                              | 5                   | 10                          | $mV_{max}$          |
|                                               | $6V \leq V_{IN} \leq 40V$ , $I_O = 1\text{ mA}$                        | 10                  | 30                          |                     |
| Load Regulation                               | $100\text{ }\mu\text{A} \leq I_O \leq 5\text{ mA}$                     | 10                  | 30                          | $mV_{max}$          |
|                                               | $5\text{ mA} \leq I_O \leq 50\text{ mA}$                               | 10                  | 30                          |                     |
| Output Impedance                              | $I_O = 30\text{ mAdc}$ and $10\text{ mArms}$ ,<br>$f = 1000\text{ Hz}$ | 450                 |                             | $m\Omega$           |
| Quiescent Current                             | $I_O = 100\text{ }\mu\text{A}$ , $8V \leq V_{IN} \leq 24V$             | 9                   | 15                          | $\mu\text{A}_{max}$ |
|                                               | $I_O = 10\text{ mA}$ , $8V \leq V_{IN} \leq 24V$                       | 0.20                | 0.50                        | $\text{mA}_{max}$   |
|                                               | $I_O = 50\text{ mA}$ , $8V \leq V_{IN} \leq 24V$                       | 1.5                 | 2.5                         | $\text{mA}_{max}$   |
| Output Noise Voltage                          | 10 Hz–100 kHz                                                          | 500                 |                             | $\mu\text{V}_{rms}$ |
| Long Term Stability                           |                                                                        | 20                  |                             | $mV/1000\text{ Hr}$ |
| Ripple Rejection                              | $V_{ripple} = 1\text{ V}_{rms}$ , $f_{ripple} = 120\text{ Hz}$         | 60                  | 40                          | $\text{dB}_{min}$   |
| Dropout Voltage                               | $I_O = 100\text{ }\mu\text{A}$                                         | 0.05                | 0.10                        | $V_{max}$           |
|                                               | $I_O = 50\text{ mA}$                                                   | 0.20                | 0.40                        | $V_{max}$           |
| Reverse Polarity<br>DC Input Voltage          | $R_L = 500\Omega$ , $V_O \geq -0.3V$                                   |                     | -15                         | $V_{min}$           |
| Reverse Polarity<br>Transient Input Voltage   | $R_L = 500\Omega$ , $T = 1\text{ ms}$                                  | -80                 | -50                         | $V_{min}$           |
| Output Leakage with<br>Reverse Polarity Input | $V_{IN} = -15V$ , $R_L = 500\Omega$                                    | -0.1                | -600                        | $\mu\text{A}_{max}$ |
| Maximum Line Transient                        | $R_L = 500\Omega$ , $V_O \leq 5.5V$ , $T = 40\text{ ms}$               |                     | 60                          | $V_{min}$           |
| Short Circuit<br>Current                      | $V_O = 0V$                                                             | 120                 | 250                         | $\text{mA}_{max}$   |
|                                               |                                                                        |                     | 65                          | $\text{mA}_{min}$   |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. DC and AC electrical specifications do not apply when operating the device beyond its specified operating ratings.

**Note 2:** Human body model, 100 pF discharge through a 1.5 k $\Omega$  resistor.

**Note 3:** The maximum power dissipation is a function of  $T_{Jmax}$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_D = (T_{Jmax} - T_A)/\theta_{JA}$ . If this dissipation is exceeded, the die temperature will rise above 150°C and the LM2936 will go into thermal shutdown. For the LM2936Z, the junction-to-ambient thermal resistance ( $\theta_{JA}$ ) is 195°C/W. For the LM2936M,  $\theta_{JA}$  is 160°C/W.


**Note 4:** Typicals are at 25°C (unless otherwise specified) and represent the most likely parametric norm.

**Note 5:** Tested limits are guaranteed to National's AOQL (Average Outgoing Quality Level) and 100% tested.


**Note 6:** To ensure constant junction temperature, pulse testing is used.

## Typical Performance Characteristics


**Maximum Power Dissipation (TO-92)**




**Dropout Voltage**




**Dropout Voltage**




**Quiescent Current**




**Quiescent Current**




**Quiescent Current**




**Quiescent Current**




**Quiescent Current**




**Output Capacitor ESR**




**Peak Output Current**



**Peak Output Current**




**Current Limit**




## Typical Performance Characteristics (Continued)


**Line Transient Response**




**Output at Voltage Extremes**




**Ripple Rejection**




**Load Transient Response**



**Low Voltage Behavior**



**Output Impedance**




## Applications Information

Unlike other PNP low dropout regulators, the LM2936 remains fully operational to 40V. Owing to power dissipation characteristics of the TO-92 package, full output current cannot be guaranteed for all combinations of ambient temperature and input voltage. As an example, consider an LM2936 operating at 25°C ambient. Using the formula for maximum allowable power dissipation given in (Note 3), we find that  $P_{Dmax} = 641 \text{ mW}$  at 25°C. Including the small contribution of the quiescent current to total power dissipation the maximum input voltage (while still delivering 50 mA output current) is 17.3V. The device will go into thermal shutdown if it attempts to deliver full output current with an input voltage of more than 17.3V. Similarly, at 40V input and 25°C ambient the LM2936 can deliver 18 mA maximum.


Under conditions of higher ambient temperatures, the voltage and current calculated in the previous examples will drop. For instance, at the maximum ambient of 125°C the LM2936 can only dissipate 128 mW, limiting the input voltage to 7.34V for a 50 mA load, or 3.5 mA output current for a 40V input.


While the LM2936 maintains regulation to 60V, it will not withstand a short circuit above 40V because of safe operating area limitations in the internal PNP pass device. Above 60V the LM2936 will break down with catastrophic effects on the regulator and possibly the load as well. Do not use this device in a design where the input operating voltage may exceed 40V, or where transients are likely to exceed 60V.

# Equivalent Schematic Diagram

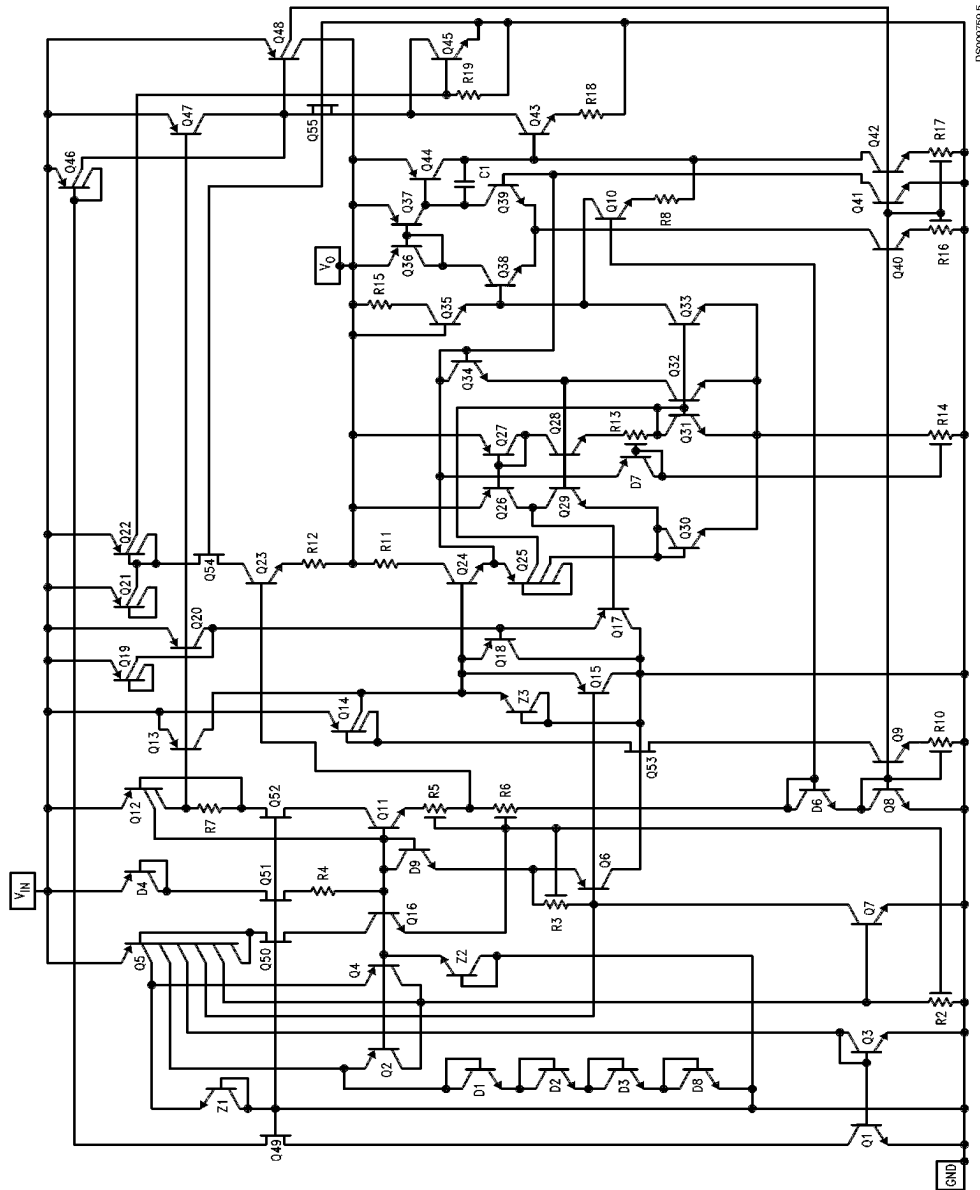


DS90C03/04



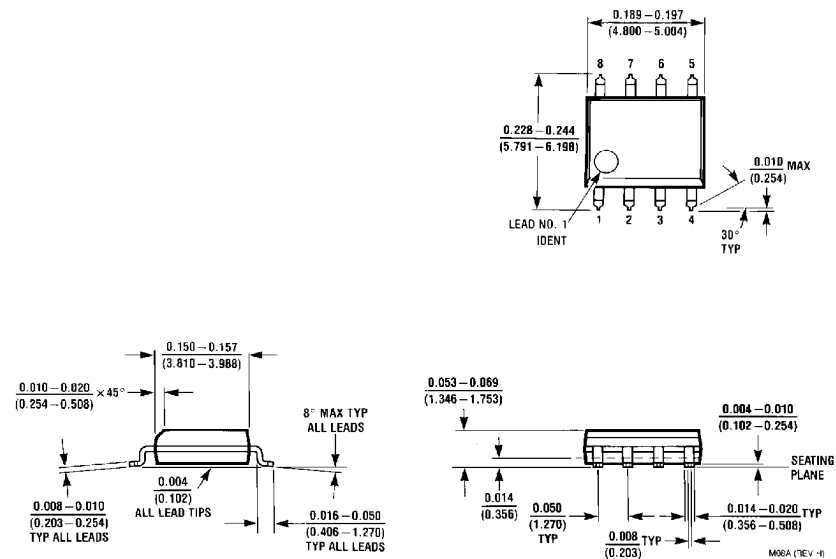**Physical Dimensions** inches (millimeters) unless otherwise noted

**8-Lead Small Outline Molded Package (M)**  
**NS Package Number M08A**

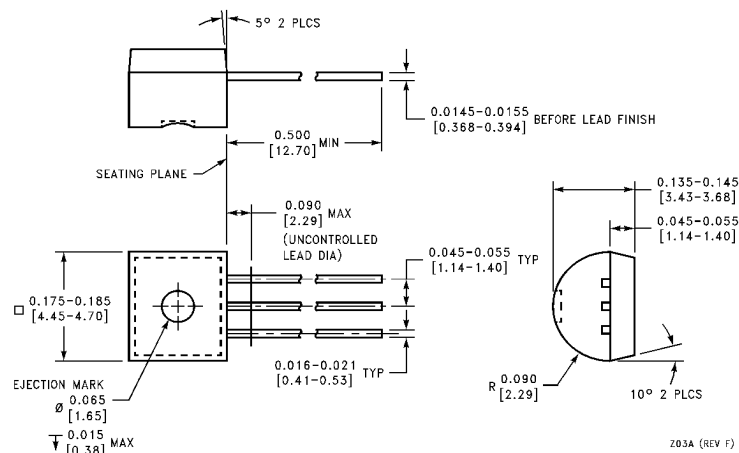

**3-Lead TO-92 Plastic Package (Z)**  
**NS Package Number Z03A**