

LM148, LM248, LM348 QUADRUPLE OPERATIONAL AMPLIFIERS

SLOS058A – OCTOBER 1979 – REVISED DECEMBER 1992


- μ A741 Operating Characteristics
- Low Supply Current Drain . . . 0.6 mA Typ (per amplifier)
- Low Input Offset Voltage
- Low Input Offset Current
- Class AB Output Stage
- Input/Output Overload Protection
- Designed to Be Interchangeable With National LM148, LM248, and LM348

description


The LM148, LM248, and LM348 are quadruple, independent, high-gain, internally compensated operational amplifiers designed to have operating characteristics similar to the μ A741. These amplifiers exhibit low supply current drain, and input bias and offset currents that are much less than those of the μ A741.

The LM148 is characterized for operation over the full military temperature range of -55°C to 125°C , the LM248 is characterized for operation from -25°C to 85°C , and the LM348 is characterized for operation from 0°C to 70°C .


symbol (each amplifier)



LM148 . . . J PACKAGE
LM248, LM348 . . . D, N, OR PW PACKAGE
(TOP VIEW)



LM148 . . . FK PACKAGE
(TOP VIEW)



NC – No internal connection

AVAILABLE OPTIONS

T _A	V _{IO} max AT 25°C	PACKAGE				
		SMALL OUTLINE (D)	CHIP CARRIER (FK)	CERAMIC DIP (J)	PLASTIC DIP (N)	TSSOP (PW)
0°C to 70°C	6 mV	LM348D	—	—	LM348N	LM348PW
-25°C to 85°C	6 mV	LM248D	—	—	LM248N	—
-55°C to 125°C	5 mV	—	LM148FK	LM148J	—	—

The D package is available taped and reeled. Add the suffix R to the device type (e.g., LM348DR).

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1992, Texas Instruments Incorporated

8961724 0092723 608

2-25

LM148, LM248, LM348 QUADRUPLE OPERATIONAL AMPLIFIERS

SLOS058A – OCTOBER 1979 – REVISED DECEMBER 1992

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

	LM148	LM248	LM348	UNIT
Supply voltage, V_{CC+} (see Note 1)	22	18	18	V
Supply voltage, V_{CC-} (see Note 1)	-22	-18	-18	V
Differential input voltage, V_{ID} (see Note 2)	44	36	36	V
Input voltage, V_I (either input, see Notes 1 and 3)	± 22	± 18	± 18	V
Duration of output short circuit (see Note 4)	unlimited	unlimited	unlimited	
Continuous total power dissipation	See Dissipation Rating Table			
Operating free-air temperature range, T_A	-55 to 125	-25 to 85	0 to 70	°C
Storage temperature range	-65 to 150	-65 to 150	-65 to 150	°C
Case temperature for 60 seconds	FK package	260		°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds	J package	300		°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	D, N, or PW package		260	°C

- NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between V_{CC+} and V_{CC-} .
2. Differential voltages are at $IN+$ with respect to $IN-$.
3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or the value specified in the table, whichever is less.
4. The output may be shorted to ground or either power supply. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR	DERATE ABOVE T_A	$T_A = 70^\circ\text{C}$ POWER RATING	$T_A = 85^\circ\text{C}$ POWER RATING	$T_A = 125^\circ\text{C}$ POWER RATING
D	900 mW	7.6 mW/°C	32°C	608 mW	494 mW	N/A
FK	900 mW	11.0 mW/°C	68°C	880 mW	715 mW	275 mW
J	900 mW	11.0 mW/°C	68°C	880 mW	715 mW	275 mW
N	900 mW	9.2 mW/°C	52°C	736 mW	598 mW	N/A
PW	700 mW	5.6 mW/°C	N/A	448 mW	N/A	N/A

recommended operating conditions

	MIN	MAX	UNIT
Supply voltage, V_{CC+}	4	18	V
Supply voltage, V_{CC-}	-4	-18	V

8961724 0092724 544

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

LM148, LM248, LM348 QUADRUPLE OPERATIONAL AMPLIFIERS

SLOS058A—OCTOBER 1979—REVISED DECEMBER 1992

electrical characteristics at specified free-air temperature, $V_{CC} \pm = \pm 15$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	LM148			LM248			LM348			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_O = 0$ 25°C Full range		1	5		1	6		1	6	mV
I_{IO} Input offset current	$V_O = 0$ 25°C Full range		4	25		4	50		4	50	nA
I_{IB} Input bias current	$V_O = 0$ 25°C Full range		30	100		30	200		30	200	nA
V_{ICR} Common-mode input voltage range	Full range	± 12			± 12			± 12			V
V_{OM} Maximum peak output voltage swing	$R_L = 10$ k Ω 25°C	± 12	± 13		± 12	± 13		± 12	± 13		V
	$R_L \geq 10$ k Ω Full range	± 12			± 12			± 12			
	$R_L = 2$ k Ω 25°C	± 10	± 12		± 10	± 12		± 10	± 12		
	$R_L \geq 2$ k Ω Full range	± 10			± 10			± 10			
A_{VD} Large-signal differential voltage amplification	$V_O = \pm 10$ V, $R_L \geq 2$ k Ω 25°C	50	160		25	160		25	160		V/mV
	Full range	25			15			15			
r_i Input resistance†	25°C	0.8	2.5		0.8	2.5		0.8	2.5		M Ω
B_1 Unity-gain bandwidth	$A_{VD} = 1$ 25°C		1			1			1		MHz
ϕ_m Phase margin	$A_{VD} = 1$ 25°C		60°			60°			60°		
CMRR Common-mode rejection ratio	$V_{IC} = V_{ICRmin}$, $V_O = 0$ 25°C	70	90		70	90		70	90		dB
	Full range	70			70			70			
kSVR Supply-voltage rejection ratio ($\Delta V_{CC}/\Delta V_{IO}$)	$V_{CC} \pm = \pm 9$ V to ± 15 V, $V_O = 0$ 25°C	77	96		77	96		77	96		dB
I_{OS} Short-circuit output current	Full range	77			77			77			
	25°C		± 25			± 25			± 25		mA
I_{CC} Supply current (four amplifiers)	No load $V_O = 0$ 25°C										
	$V_O = V_{OM}$		2.4	3.6		2.4	4.5		2.4	4.5	mA
V_{O1}/V_{O2} Crosstalk attenuation	$f = 1$ Hz to 20 kHz		120			120			120		dB

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. Full range for T_A is -55°C to 125°C for LM148, -25°C to 85°C for LM248, and 0°C to 70°C for LM348.

‡ This parameter is not production tested.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-27

8961724 0092725 480

LM148, LM248, LM348

QUADRUPLE OPERATIONAL AMPLIFIERS

SLOS058A – OCTOBER 1979 – REVISED DECEMBER 1992

operating characteristics, $V_{CC\pm} = \pm 15\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SR Slew rate at unity gain	$R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, See Figure 1		0.5		V/ μs

PARAMETER MEASUREMENT INFORMATION

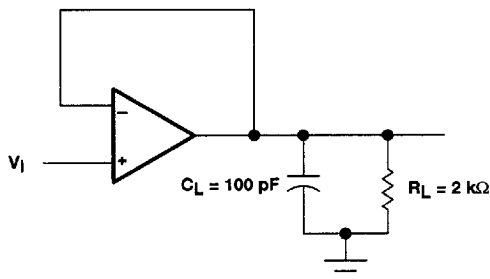


Figure 1. Unity-Gain Amplifier

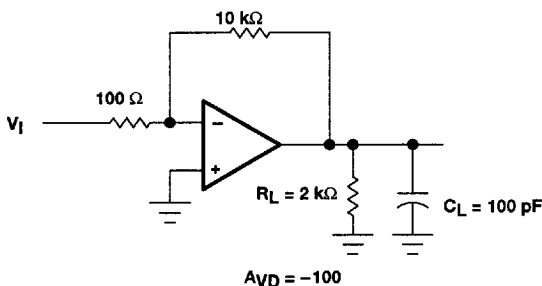


Figure 2. Inverting Amplifier