

ADVANCE INFORMATION

All information in this data sheet is preliminary and subject to change.

6/95

EVALUATION KIT WILL BE AVAILABLE

MAXIM

325MHz High-Speed Op Amp

MAX476

General Description

The MAX476 is a wide bandwidth, fast settling, unity-gain-stable op amp featuring low noise, low differential gain and phase errors, high slew rate, high precision, and high output current. The device architecture uses a standard voltage-feedback topology that can be configured into any desired gain setting, as with other general-purpose op amps.


Unlike high-speed amplifiers using current-mode feedback architectures, the MAX476 has a unique input stage that combines the benefits of the voltage-feedback design (flexibility in choice of feedback resistor, two high-impedance inputs) with those of the current-feedback design. It also has the precision of voltage-feedback amplifiers, characterized by low input-offset voltage and bias current, low noise, and high common-mode and power-supply rejection.

The MAX476 is ideally suited for driving 50Ω or 75Ω loads. In addition, the device incorporates a high-speed shutdown mode to disable the output in multiplexed applications and to conserve power. Packages include 8-pin DIP, SO, and μMAX.

Applications

Broadcast and High-Definition TV Systems
Video Switching and Routing
Communications
Medical Imaging
Precision DAC/ADC Buffer

Typical Operating Circuit

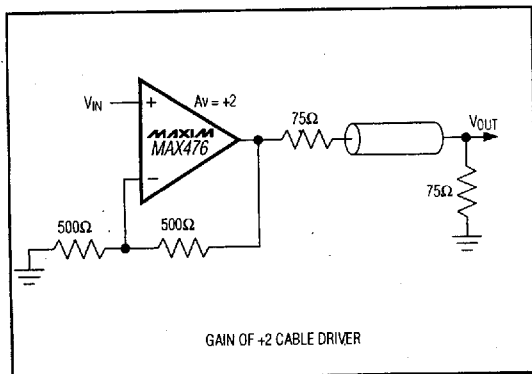

Features

- ♦ High Speed:
 - 325MHz Small-Signal Bandwidth ($A_v = 1$)
 - 150MHz Full-Power Bandwidth ($A_v = 1$, $V_o = 2V_{p-p}$)
 - 1800V/μs Slew Rate
 - 100MHz 0.1dB Gain Flatness
- ♦ Low Differential Phase/Gain Error 0.01°/0.01%
- ♦ 8mA Quiescent Current (400μA in shutdown)
- ♦ High-Impedance Output in Shutdown Mode
- ♦ Low Input-Referred Voltage Noise: 5nV/√Hz
- ♦ Low Input-Offset Voltage: 0.5mV
- ♦ 2μA Input Bias Current (either input)
- ♦ Voltage-Feedback Topology for Simple Design Configurations


Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
MAX476CPA	0°C to +70°C	8 Plastic DIP
MAX476CSA	0°C to +70°C	8 SO
MAX476CUA	0°C to +70°C	8 μMAX
MAX476C/D	0°C to +70°C	Dice*
MAX476EPA	-40°C to +85°C	8 Plastic DIP
MAX476ESA	-40°C to +85°C	8 SO
MAX476EUA	-40°C to +85°C	8 μMAX
MAX476MJA	-55°C to +125°C	8 CERDIP**

* Dice are specified at $T_A = +25^\circ\text{C}$, DC parameters only.

** Contact factory for availability.

Pin Configuration

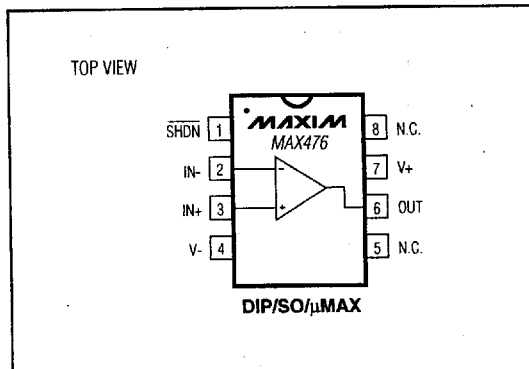

MAXIM

Maxim Integrated Products 8-43

Call toll free 1-800-998-8800 for free samples or literature.

5876651 0012032 9T9