


Three Phase Ultrafast Bridges 800 & 801 Series

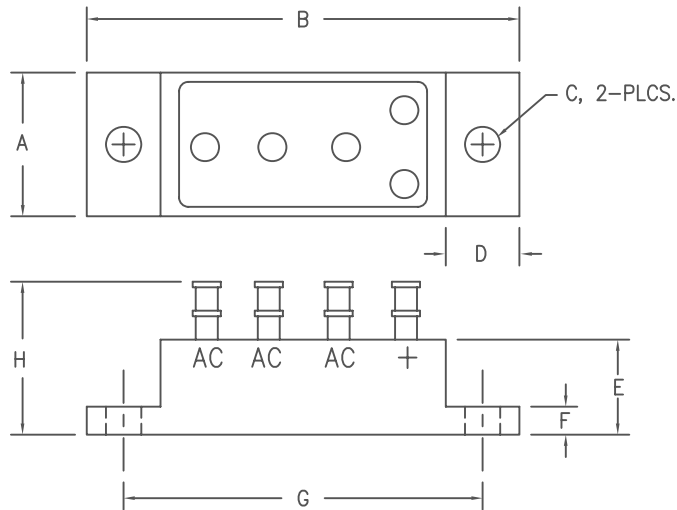

Dim.	Inches	Millimeter
A	.740-.760	18.80-19.30
B	2.240-2.260	56.90-57.40
C	.164-.174 DIA.	4.17-4.42 DIA.
D	.370-.390	9.40-9.91
E	.486-.506	12.34-12.85
F	.115-.135	2.92-3.43
G	1.870-1.880	47.50-47.75
H	.820 MAX.	20.83 MAX.

Microsemi
Catalog Number

Working Peak
Reverse Voltage

800-1, 801-1

50V

800-2, 801-2

100V

800-3, 801-3

125V

800-4, 801-4

150V

- Current ratings to 40A
- V_{RRM} to 150V
- Only fused-in-glass diodes used
- 150°C junction temperature
- Surge ratings to 250A
- Recovery time: 25nS
- Electrically isolated Aluminum case
- MIL-PRF-19500 Similarity
- SN/Pb terminations

Electrical Characteristics

		800	801
Maximum DC output current- $T_C = 55^\circ\text{C}$	I_O	40A	25A
Maximum DC output current- $T_C = 100^\circ\text{C}$	I_O	20A	16A
Maximum surge current	I_{FSM}	250A	125A
Max peak forward voltage per leg @ 25°C	V_{FM}	.95V @ 10A*	.95V @ 6A*
Max peak reverse current per leg @ 25°C, V_{RRM}	I_{RM}	20uA	10uA
Max peak reverse current per leg @ 100°C, V_{RRM}	I_{RM}	1000uA	300uA
Max. recovery time per leg 1A, 1A, 0.5A	t_{rr}	50nS	50nS

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range	T_{STG}	-65°C to 150°C
Operating temperature range	T_J	-65°C to 150°C
Maximum thermal resistance - 800 series	$R_{\theta JC}$	1.5°C/W junction to case
Maximum thermal resistance - 801 series	$R_{\theta JC}$	3.0°C/W junction to case
Max. thermal resistance junction to ambient	$R_{\theta JA}$	20°C/W
Weight		30 grams



8700 East Thomas Road, P.O. Box 1390
Scottsdale, AZ 85252
PH: (480) 941-6300
FAX: (480) 947-1503
www.microsemi.com

06-01-07 Rev. 3

800 & 801

Figure 1
Typical Forward Characteristics – Per Leg
800 Series

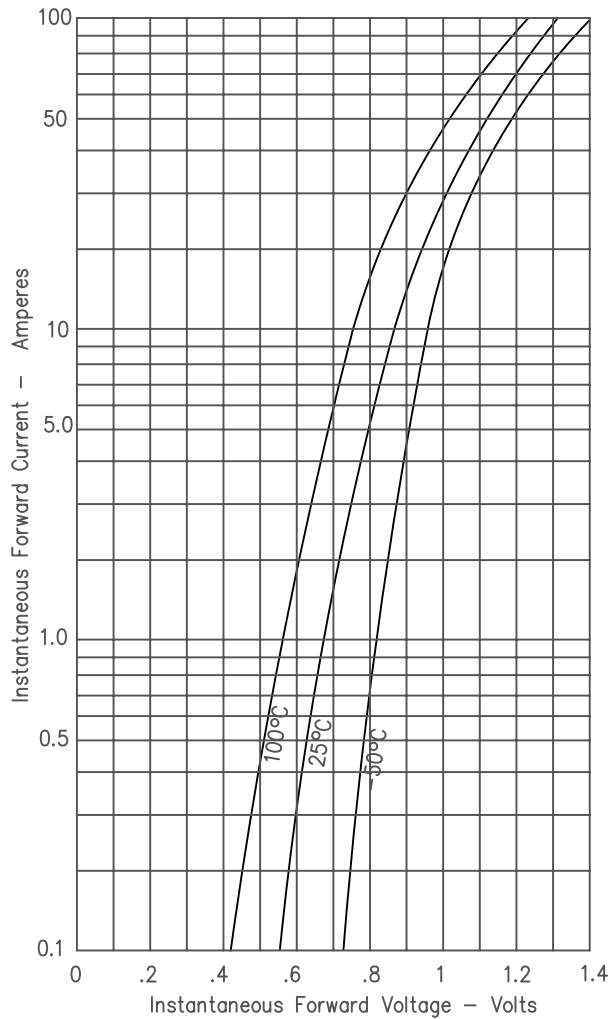


Figure 3
Current Derating


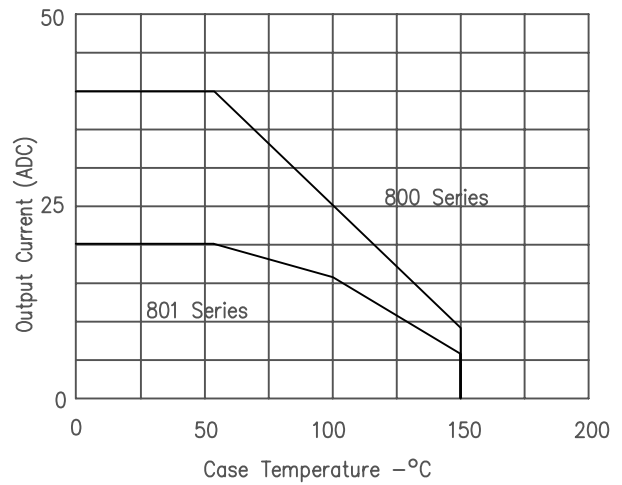


Figure 2
Typical Reverse Leakage Current – Per Leg
800 Series

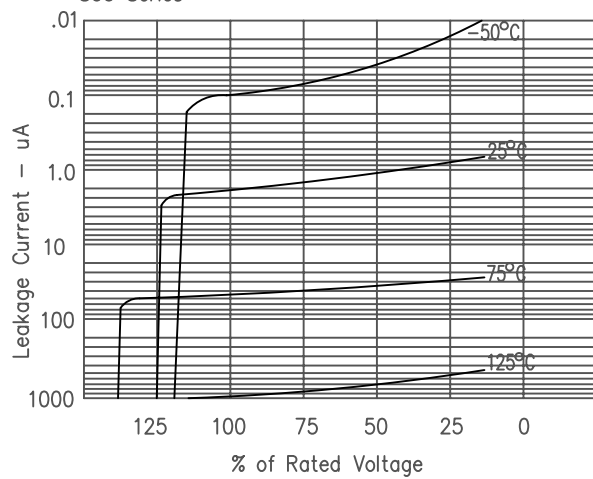

800 & 801

Figure 1
Typical Forward Characteristics – Per Leg
801 Series

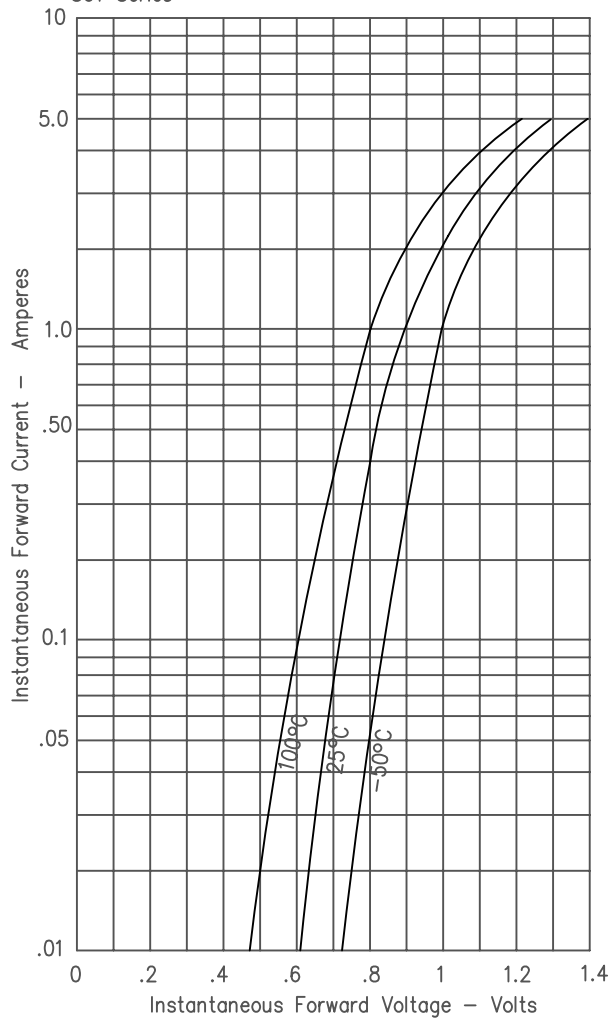


Figure 2
Typical Reverse Leakage Current – Per Leg
801 Series

