

LA8510 and LA8515N

Speech Network Chip Set

FEATURES

The LA8510, designed for use with ceramic microphone elements, interfaces directly to a ceramic receiver, and the LA8515N, to a low-impedance receiver.

Mute function allows switching between DTMF and voice signal inputs for transmission.

Automatic transmitter and receiver gain control


Gain control can be adjusted manually to reduce excessive gain.

Key-tone input

Low operating current allows several devices to be powered from a single line.

20-pin DIP

LA8515N BLOCK DIAGRAM

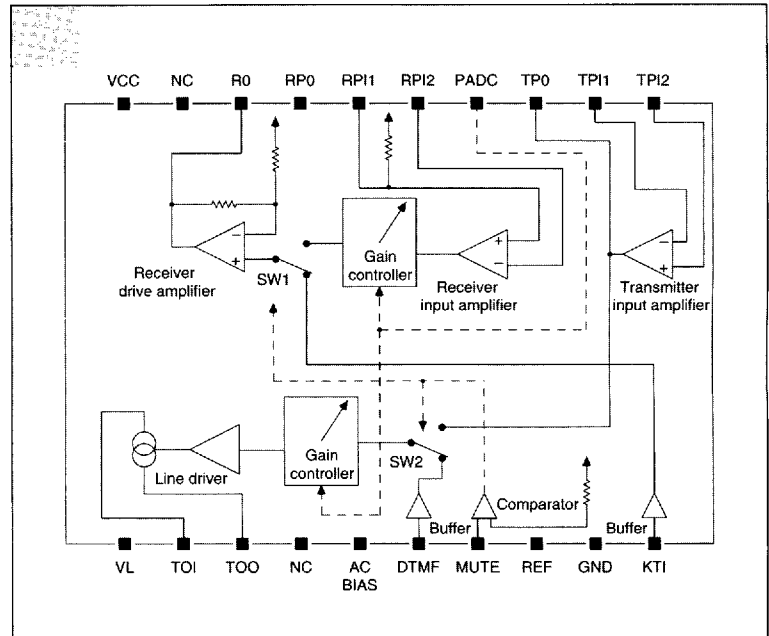

TYPICAL APPLICATION

