



CYPRESS

CY2255

Pentium™ Processor Compatible Clock/Synthesizer for OPTi Viper™ Chipset

Features

- Multiple clock outputs to meet requirements of OPTi Viper™ chipset
 - Five CPU clocks @ 66.66 MHz, 60 MHz, and 50 MHz, pin selectable
 - One Early clock, leads CPU clocks by 2 to 5 ns
 - Six PCI clocks (CPUCLK/2)
 - Two Ref. clocks @ 14.318 MHz
 - Ref. 14.318 MHz Xtal oscillator input
- CPU clock jitter ≤ 250 ps cycle-to-cycle
- Low skew outputs
 - ≤ 250 ps between CPU clocks
 - ≤ 500 ps between PCI clocks
 - ≤ 750 ps between CPU clocks and PCI clocks
- Freq. stability = 0.01% (max.)
- Output duty cycle 40% min. to 60% max.
- Test mode support
- 3.3V operation


CMOS technology

Functional Description

The CY2255 is a Clock Synthesizer/Driver chip with multiple output clocks, for the OPTi Viper™ chipset. The CY2255 outputs six CPU clocks at pin-selectable frequencies of 50, 60, and 66.66 MHz. One CPU clock leads the rest by 2 to 5 ns, and is denoted as Early Clock (ECLK). Two of the remaining five CPU clocks are three-stateable, controlled by an active-HIGH Output Enable (OE) pin. The CY2255 has six synchronous PCI clock outputs, each having a frequency of CPUCLK/2. The CY2255 also outputs two copies of the Reference clock.

The CY2255 has low-skew outputs (≤ 250 ps between the CPU clocks, ≤ 500 ps between the PCI Clocks). In addition, the CY2255 CPU clock outputs have less than 250 ps cycle-to-cycle RMS jitter. Finally, both the PCI and CPU clock outputs meet the 1V/ns slew rate requirement of a Pentium™ processor-based system.

The CY2255 accepts a 14.318 MHz reference signal as its input, and uses it to generate the CPU and PCI clocks from a single PLL. The CY2255 runs off a 3.3V supply.

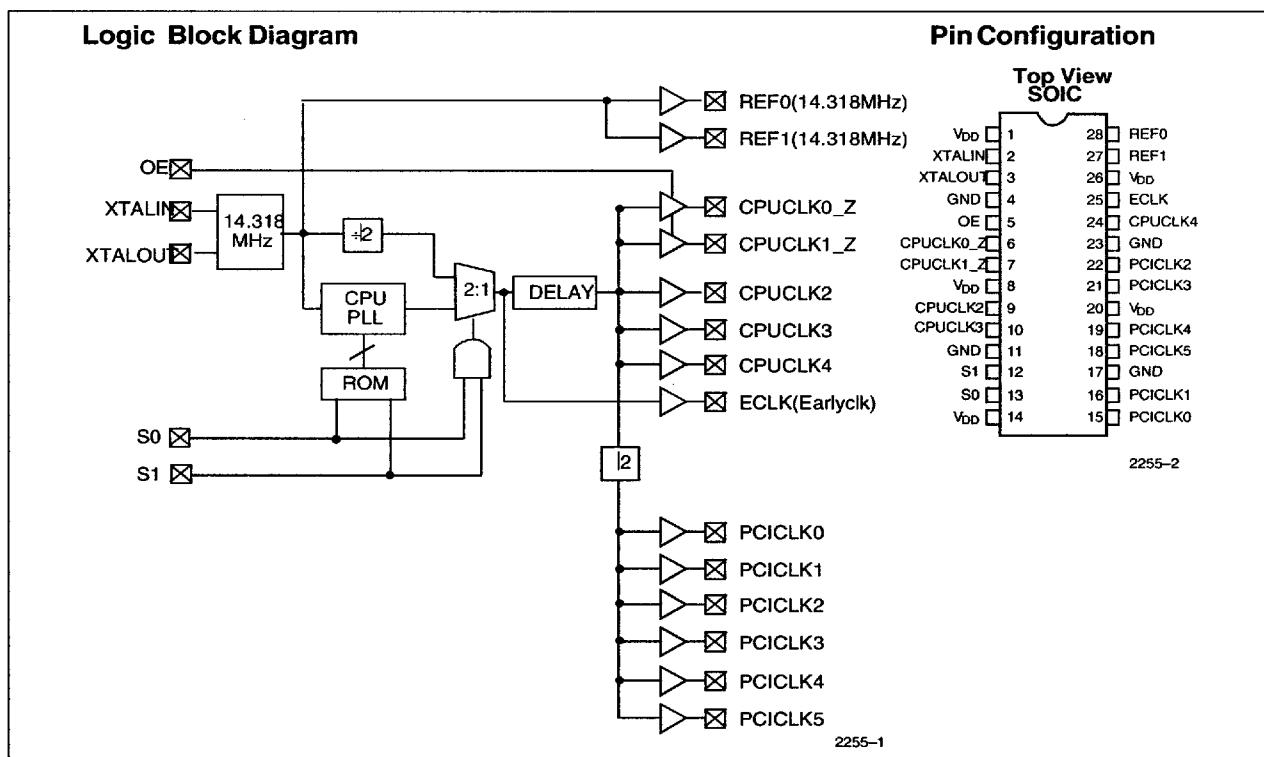

Pentium is a trademark of Intel Corporation.
Viper is a trademark of OPTi.

Pin Summary

Name	Number	Description
V _{DD}	1	Digital voltage supply
XTALIN ^[1]	2	Reference crystal input
XTALOUT ^[1]	3	Reference crystal feedback
GND	4	Ground
OE	5	Output Enable, Active HIGH
CPUCLK0_Z	6	CPU clock output, three-stateable by OE
CPUCLK1_Z	7	CPU clock output, three-stateable by OE
V _{DD}	8	Digital voltage supply
CPUCLK2	9	CPU clock output
CPUCLK3	10	CPU clock output
GND	11	Ground
S1	12	CPU clock select input, bit 1
S0	13	CPU clock select input, bit 0
V _{DD}	14	Digital voltage supply
PCICLK0	15	PCI clock output
PCICLK1	16	PCI clock output
GND	17	Ground
PCICLK5	18	PCI clock output
PCICLK4	19	PCI clock output
V _{DD}	20	Digital voltage supply
PCICLK3	21	PCI clock output
PCICLK2	22	PCI clock output
GND	23	Ground
CPUCLK4	24	CPU clock output
ECLK	25	Early clock output, leads CPU clocks by 2 to 5 ns
V _{DD}	26	Digital voltage supply
REF1	27	Reference clock output (14.318 MHz)
REF0	28	Reference clock output (14.318 MHz)

Notes:

1. For best accuracy, use a parallel-resonant crystal, assume C_{LOAD} = 17 pF.

Function Table

OE	S0	S1	XTALIN Input	CPUCLK_Z [0:1]	ECLK, CPUCLK [2:4]	PCICLK	Ref. Clock Output
0	0	0	14.318 MHz	High-Z	50 MHz	CPUCLK/2	14.318 MHz
0	0	1	14.318 MHz	High-Z	60 MHz	CPUCLK/2	14.318 MHz
0	1	0	14.318 MHz	High-Z	66.66 MHz	CPUCLK/2	14.318 MHz
0	1	1	TCLK ^[2]	High-Z	TCLK/2	TCLK/4	TCLK
1	0	0	14.318 MHz	50 MHz	50 MHz	CPUCLK/2	14.318 MHz
1	0	1	14.318 MHz	60 MHz	60 MHz	CPUCLK/2	14.318 MHz
1	1	0	14.318 MHz	66.66 MHz	66.66 MHz	CPUCLK/2	14.318 MHz
1	1	1	TCLK ^[2]	TCLK/2	TCLK/2	TCLK/4	TCLK

PCI/CPU Clock Driver Strength Requirements

- Matched impedances on both rising and falling edges on the output drivers

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Supply Voltage -0.5 to +7.0V

Input Voltage -0.5V to $V_{DD}+0.5$

Storage Temperature (Non-Condensing) -65°C to +150°C

Max. Soldering Temperature (10 sec) +260°C

Junction Temperature +150°C

Static Discharge Voltage >2000V
(per MIL-STD-883, Method 3015)

Operating Range

Ambient Temperature	V_{DD}
$0^{\circ}\text{C} \leq T_{\text{AMBIENT}} \leq 70^{\circ}\text{C}$	$3.3\text{V} \pm 5\%$

Operating Conditions^[3]

Parameter	Description	Min.	Max.	Unit
V_{DD}	Supply Voltage	3.135	3.465	V
T_A	Ambient Temperature	0	70	°C
C_L	Max. Capacitive Load on CPUCLK PCICLK REF0 REF1		20 30 30 15	pF
$f_{(\text{REF})}$	Reference Frequency, Oscillator Nominal Value	14.318	14.318	MHz

Notes:

2. TCLK is a test clock on the XTALIN input during test mode.
3. Electrical parameters are guaranteed with these operating conditions.

Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions			Min.	Max.	Unit
V_{OH}	HIGH-level Output Voltage	$V_{DD} = V_{DD} \text{ Min.}$	$I_{OH} = 6 \text{ mA}$	CPUCLK, ECLK	2.4		V
			$I_{OH} = 12 \text{ mA}$	PCICLK, REF0			
			$I_{OH} = 8 \text{ mA}$	REF1			
V_{OL}	LOW-level Output Voltage	$V_{DD} = V_{DD} \text{ Min.}$	$I_{OL} = 6 \text{ mA}$	CPUCLK, ECLK		0.4	V
			$I_{OL} = 12 \text{ mA}$	PCICLK, REF0			
			$I_{OL} = 8 \text{ mA}$	REF1			
V_{IH}	HIGH-level Input Voltage	Except Crystal Inputs			2.0		V
V_{IL}	LOW-level Input Voltage	Except Crystal Inputs				0.8	V
I_{IH}	Input HIGH Current	$V_{IH} = V_{DD} - 0.5V$			-5	+5	μA
I_{IL}	Input LOW Current	$V_{IL} = 0.5V$			-5	+5	μA
I_{OZ}	Output Leakage Current	Three-state outputs			-10	+10	μA
I_{DD}	Power Supply Current	$V_{DD} = 3.465, V_{IN} = 0 \text{ or } V_{DD}$				90	mA

Switching Characteristics^[4]


Parameter	Output	Name	Description	Min.	Max.	Unit
t_1	All	Output Duty Cycle ^[5]	$t_1 = t_{1A} + t_{1B}$	40%	60%	
t_2	CPUCLK, ECLK, PCICLK	Output Slew Rate	0.4–2.4V	1		V/ns
t_3	REF0	Rise Time	20% – 80% of V_{DD}		2.5	ns
t_3	REF1	Rise Time	20% – 80% of V_{DD}		4	ns
t_4	REF0	Fall Time	20% – 80% of V_{DD}		2.5	ns
t_4	REF1	Fall Time	20% – 80% of V_{DD}		4	ns
t_5	CPUCLK	CPU Skew	CPU-CPU clock skew		250	ps
t_6	ECLK, CPUCLK	ECLK Skew	Early-CPU clock skew (ECLK leads)	2	5	ns
t_7	PCICLK	PCI Skew	PCI-PCI clock skew		500	ps
t_8	CPUCLK, PCICLK	CPU-PCI Skew	CPU to PCI clock skew (CPU leads)		750	ps
t_9	CPUCLK	Cycle-Cycle Clock Jitter	Clock jitter		250	ps

Notes:


4. All parameters specified with outputs fully loaded.
5. Duty cycle is measured at 1.5V.

Switching Waveforms


Duty Cycle Timing

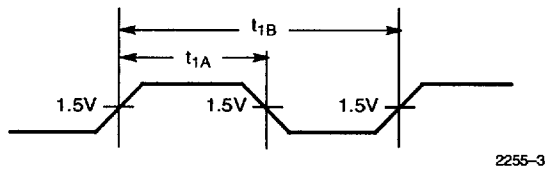


All Outputs Rise/Fall Time



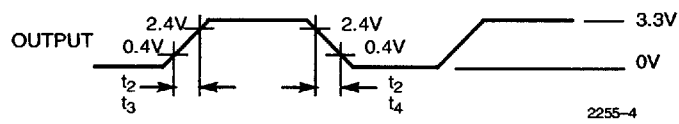


CPU-CPU Clock Skew

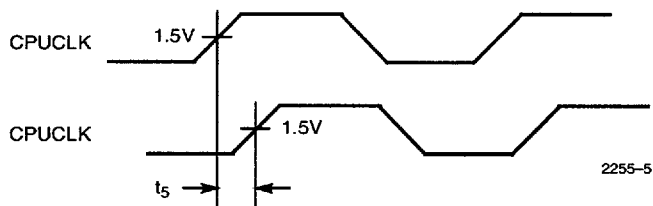

Early-CPU Clock Skew

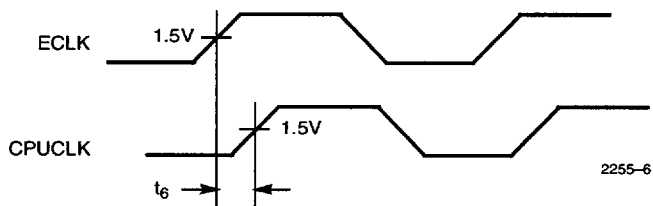

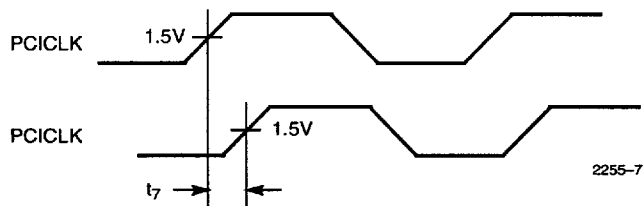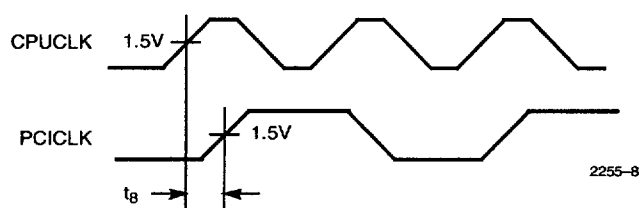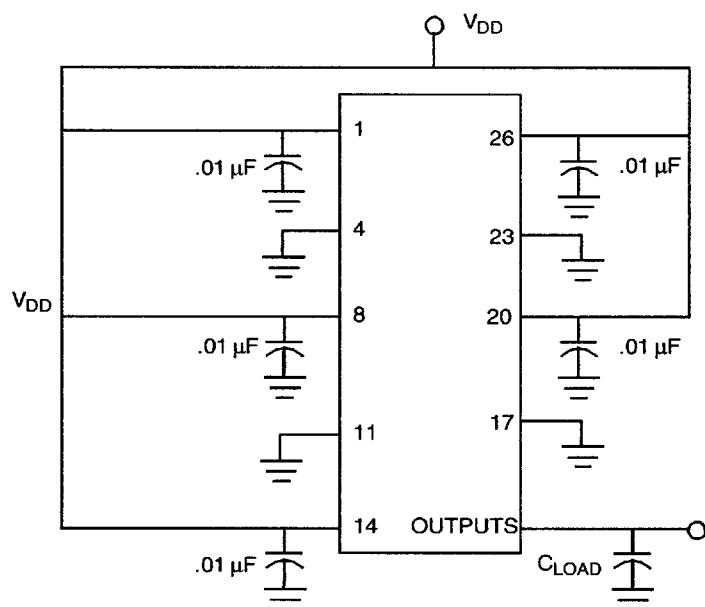Switching Waveforms (continued)
PCI-PCI Clock Skew

CPU-PCI Clock Skew

Test Circuit


Note: All capacitors should be placed as close to each pin as possible.




Ordering Information

Ordering Code	Package Name	Package Type	Operating Range
CY2255	S21	28-Pin SOIC	Commercial

Document #: 38-00442-A

Package Diagram

28-Lead (300-Mil) Molded SOIC S21

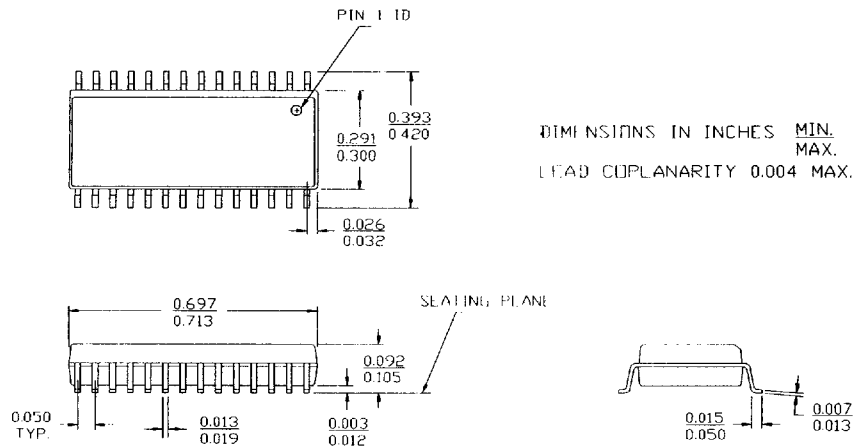

© Cypress Semiconductor Corporation, 1997. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress Semiconductor product. Nor does it convey or imply any license under patent or other rights. Cypress Semiconductor does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress Semiconductor products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress Semiconductor against all charges.