

# XC6207 Series



High Speed "Green Operation" LDO Voltage Regulators

☆GO-Compatible

May 17, 2005 V4

- ◆CMOS Low Power Consumption
- ◆Dropout Voltage : 40mV@30mA  
120mV@100mA
- ◆Output Voltage Range : 1.2V ~ 5.0V
- ◆Output Current : 300mA <Up to 380mA (TYP.)>
- ◆Low ESR Capacitor Compatible
- ◆High Ripple Rejection, Low Output Noise
- ◆Regulators with Green Operation (GO) Function
- ◆CL High-Speed Auto-Discharge (XC6207B)

## ■GENERAL DESCRIPTION

The XC6207 series are precise, low noise, high speed, low dropout regulators with green operation (GO) function. They are fabricated using Torex's CMOS process. Performance features of the series include high ripple rejection and low dropout voltage, and the series include a reference voltage source, an error amplifier, a current limiter, and a phase compensation circuit.

Output voltage is selectable in 50mV increments within a range of 1.2V~5.0V, using laser trimming technologies.


The series' output stabilization capacitor (CL) is also compatible with low ESR ceramic capacitors.

GO provides high speed operation, low power consumption and high efficiencies by automatically switching between a high speed mode (HS) and a power save mode (PS) depending upon the load current level. The switching point of the GO to the output current is being fixed inside the IC. The IC operates when the GO pin is low-level. When only high-speed operation is required, it can be fixed by inputting a high level signal to the GO pin, thus providing operating conditions with the most suitable level of supply current for the application.

The CE function enables the output to be turned off resulting in greatly reduced power consumption. In this state, with the XC6207B series, the IC turns on the internal switch located between the VOUT and VSS pins. This short enables the electric charge at the output capacitor (CL) to be discharged via the internal auto-discharge resistance, and as a result the VOUT pin quickly returns to the VSS level.

The constant current limit circuit and the current limiter's foldback circuit also operate as a short circuit protection for the output current limiter and the output pin.

## ■TYPICAL APPLICATION CIRCUIT

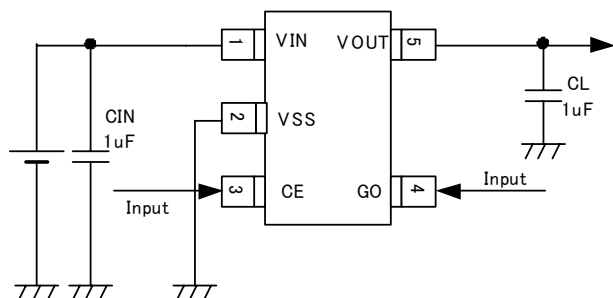

## ■APPLICATIONS

- Cellular phones
- Cordless phones, Wireless communication equipment
- Portable games
- Cameras, VCRs
- Portable AV equipment
- PDAs

## ■FEATURES

**Maximum Output Current** : 300mA <Up to 380mA (TYP.)>

**Dropout Voltage** : 120mV@ IOUT=100mA

**Operating Voltage Range**: 2.0V ~ 6.0V

**Output Voltage Setting Range**: 1.2V ~ 5.0V (50mV increments)

**Accuracy** : ±2% (HS Mode: VOUT > 1.5V)

+2%, -3% (PS Mode: VOUT > 1.5V)

±30mV (HS Mode: VOUT ≤ 1.5V)

+30mV, -45mV (PS Mode: VOUT ≤ 1.5V)

**Low Power Consumption** : 5.5 μA (TYP.)(PS mode)

50 μA (TYP.)(HS mode)

**Standby Current** : Less than 0.1 μA

**High Ripple Rejection** : 70dB @ 1kHz

**Operating Temperature Range**: -40°C ~ 85°C

**Low ESR Capacitor** : Ceramic capacitor compatible

**Ultra Small Packages** : SOT-89-5

SOT-25


USP-6C

## ■TYPICAL PERFORMANCE CHARACTERISTICS


- Supply Current vs. Output Current

XC6207A182xx

VIN=CE, VSS=GO=0V  
VIN=2.8V, CIN=CL=1.0μF, Ta=25°C

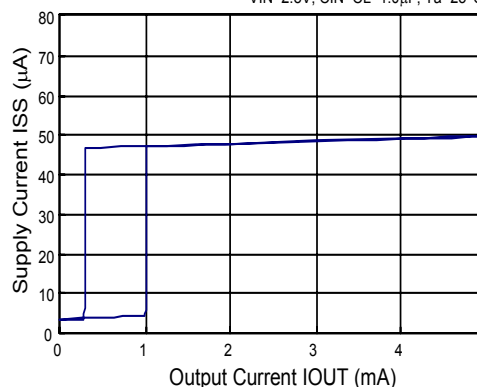

## PIN CONFIGURATION

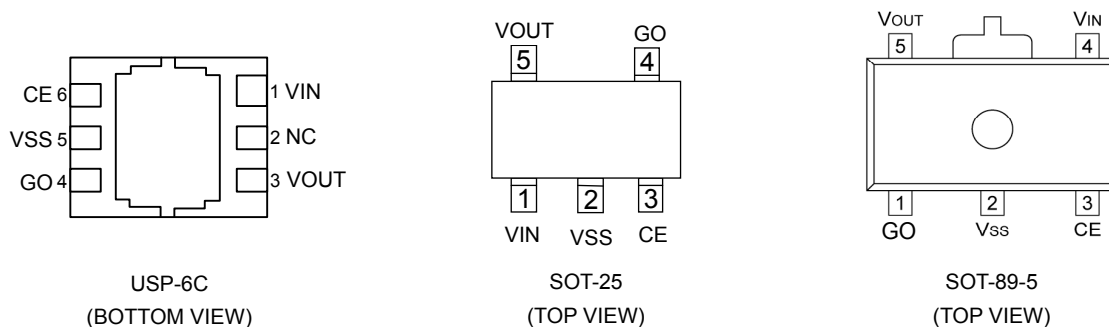

\*The dissipation pad for the USP-6C package should be solder-plated in recommended mount pattern and metal masking so as to enhance mounting strength and heat release.  
If the pad needs to be connected to other pins, it should be connected to the VSS pin, No. 5.

## PIN ASSIGNMENT

| PIN NUMBER |        |          | PIN NAME | FUNCTIONS                   |
|------------|--------|----------|----------|-----------------------------|
| USP-6C     | SOT-25 | SOT-89-5 |          |                             |
| 1          | 1      | 4        | VIN      | Power Input                 |
| 2          | -      | -        | NC       | No Connection               |
| 3          | 5      | 5        | VOUT     | Output                      |
| 4          | 4      | 1        | GO       | Green Operation Mode Switch |
| 5          | 2      | 2        | VSS      | Ground                      |
| 6          | 3      | 3        | CE       | ON/OFF Control              |

## FUNCTIONS CHART

### ●CE pin

| CE | FUNCTION  |
|----|-----------|
| H  | Operation |
| L  | Stand by  |


\*For the XC6207B series, the output capacitor (CL) is discharged via the internal auto-discharge resistance when the CE is at low level.

### ●GO pin

| GO | FUNCTION                                                                                                                      |
|----|-------------------------------------------------------------------------------------------------------------------------------|
| H  | High Speed Mode                                                                                                               |
| L  | Green Operation (HS/PS Mode Automatic Switching)<br>$IGO \leq IO_{UT}$ High Speed Mode<br>$IGOR \geq IO_{UT}$ Power Save Mode |


## ■ PACKAGING INFORMATION

## ●USP-6C

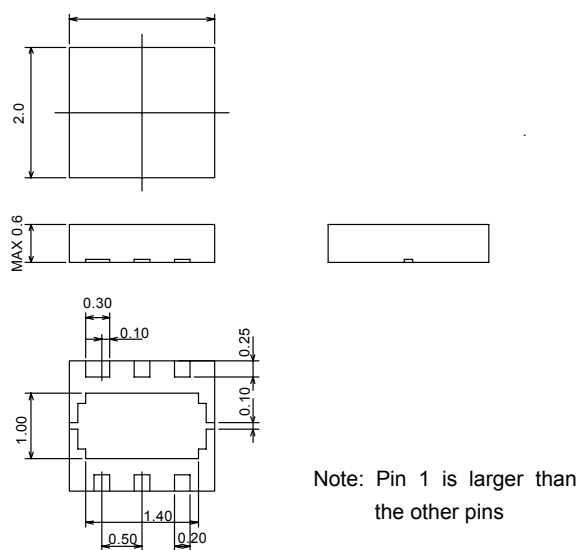


Note: Pin 1 is larger than the other pins


●SOT-89-5

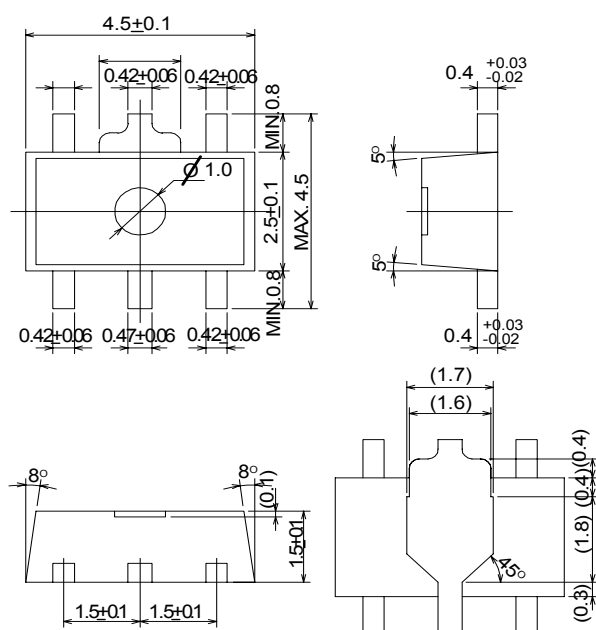


●SOT-25 (SOT-23-5)

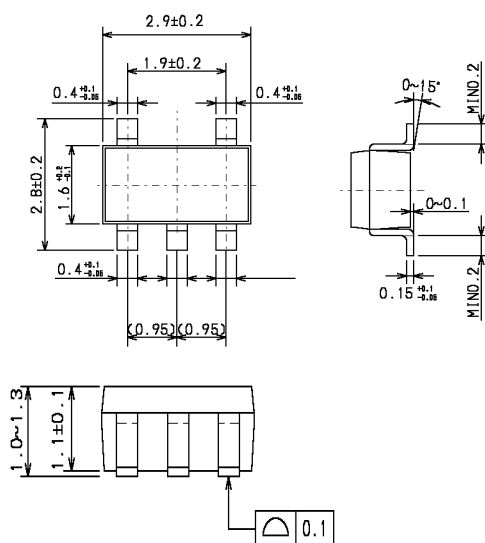

## MARKING RULE



SOT-25  
(TOP VIEW)



SOT-89-5  
(TOP VIEW)

①Represents product series

| MARK | PRODUCT SERIES |
|------|----------------|
| 7    | XC6207xxxxxx   |

②Represents type of regulator

| MARK                         |                             | PRODUCT SERIES |
|------------------------------|-----------------------------|----------------|
| OUTPUT VOLTAGE<br>100mV step | OUTPUT VOLTAGE<br>50mV step |                |
| A                            | N                           | XC6207Axxxxx   |
| B                            | P                           | XC6207Bxxxxx   |


③Represents output voltage

| MARK | OUTPUT VOLTAGE(V) |     |      |      | MARK | OUTPUT VOLTAGE(V) |     |      |      |
|------|-------------------|-----|------|------|------|-------------------|-----|------|------|
| 0    | -                 | 3.1 | -    | 3.15 | F    | 1.6               | 4.6 | 1.65 | 4.65 |
| 1    | -                 | 3.2 | -    | 3.25 | H    | 1.7               | 4.7 | 1.75 | 4.75 |
| 2    | -                 | 3.3 | -    | 3.35 | K    | 1.8               | 4.8 | 1.85 | 4.85 |
| 3    | -                 | 3.4 | -    | 3.45 | L    | 1.9               | 4.9 | 1.95 | 4.95 |
| 4    | -                 | 3.5 | -    | 3.55 | M    | 2.0               | 5.0 | 2.05 | -    |
| 5    | -                 | 3.6 | -    | 3.65 | N    | 2.1               | -   | 2.15 | -    |
| 6    | -                 | 3.7 | -    | 3.75 | P    | 2.2               | -   | 2.25 | -    |
| 7    | 0.8               | 3.8 | 0.85 | 3.85 | R    | 2.3               | -   | 2.35 | -    |
| 8    | 0.9               | 3.9 | 0.95 | 3.95 | S    | 2.4               | -   | 2.45 | -    |
| 9    | 1.0               | 4.0 | 1.05 | 4.05 | T    | 2.5               | -   | 2.55 | -    |
| A    | 1.1               | 4.1 | 1.15 | 4.15 | U    | 2.6               | -   | 2.65 | -    |
| B    | 1.2               | 4.2 | 1.25 | 4.25 | V    | 2.7               | -   | 2.75 | -    |
| C    | 1.3               | 4.3 | 1.35 | 4.35 | X    | 2.8               | -   | 2.85 | -    |
| D    | 1.4               | 4.4 | 1.45 | 4.45 | Y    | 2.9               | -   | 2.95 | -    |
| E    | 1.5               | 4.5 | 1.55 | 4.55 | Z    | 3.0               | -   | 3.05 | -    |

④Represents production lot number

0 to 9, A to Z reverse character 0 to 9, A to Z repeated  
(G, I, J, O, Q, W excepted)

## ■ MARKING RULE (Continued)



USP-6C  
(TOP VIEW)

①②Represents product series

| MARK |   | PRODUCT SERIES |
|------|---|----------------|
| ①    | ② |                |
| 0    | 7 | XC6207xxxxxx   |

③Represents type of regulator

| MARK | TYPE                                                               | PRODUCT SERIES |
|------|--------------------------------------------------------------------|----------------|
| A    | High Active with No Pull-Down Resistor, No CL Discharge Resistor   | XC6207AxxxDx   |
| B    | High Active with No Pull-Down Resistor, with CL Discharge Resistor | XC6207BxxxDx   |

④Represents integer of the output voltage

ex)

| MARK | VOLTAGE (V) | PRODUCT SERIES |
|------|-------------|----------------|
| 3    | 3.X         | XC6207x3xxDx   |
| 5    | 5.X         | XC6207x5xxDx   |

⑤Represents decimal number of the output voltage

| MARK | VOLTAGE(V) | PRODUCT SERIES | MARK | VOLTAGE(V) | PRODUCT SERIES |
|------|------------|----------------|------|------------|----------------|
| 0    | X.0        | XC6207xx02/1Dx | A    | X.05       | XC6207xx0A/BDx |
| 1    | X.1        | XC6207xx12/1Dx | B    | X.15       | XC6207xx1A/BDx |
| 2    | X.2        | XC6207xx22/1Dx | C    | X.25       | XC6207xx2A/BDx |
| 3    | X.3        | XC6207xx32/1Dx | D    | X.35       | XC6207xx3A/BDx |
| 4    | X.4        | XC6207xx42/1Dx | E    | X.45       | XC6207xx4A/BDx |
| 5    | X.5        | XC6207xx52/1Dx | F    | X.55       | XC6207xx5A/BDx |
| 6    | X.6        | XC6207xx62/1Dx | H    | X.65       | XC6207xx6A/BDx |
| 7    | X.7        | XC6207xx72/1Dx | K    | X.75       | XC6207xx7A/BDx |
| 8    | X.8        | XC6207xx82/1Dx | L    | X.85       | XC6207xx8A/BDx |
| 9    | X.9        | XC6207xx92/1Dx | M    | X.95       | XC6207xx9A/BDx |

⑥Represents production lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excepted)

Note: No character inversion used.

# XC6207 Series

## ■PRODUCT CLASSIFICATION


### ●Ordering Information

XC6207 ①②③④⑤⑥


| DESIGNATOR | DESCRIPTION        | SYMBOL  | DESCRIPTION                                                                                                                                                                                                                                                       |
|------------|--------------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ①          | Type of Regulator  | A       | : CE High Active, no resistor for fixing pin's electrical potential, no CL discharge resistor                                                                                                                                                                     |
|            |                    | B       | : CE High Active, no resistor for fixing pin's electrical potential, with CL discharge resistor                                                                                                                                                                   |
| ② ③        | Output Voltage     | 12 ~ 50 | : ex.) $V_{OUT}(T) = 3.0V \rightarrow ② = 3, ③ = 0$                                                                                                                                                                                                               |
| ④          | Output Accuracy    | 2       | : Output voltage 100mV step setting<br>When $1.2V \leq V_{OUT}(T) \leq 1.5V$ , HS mode : Accuracy $\pm 30mV$<br>PS mode : Accuracy $+30mV$ or $-45mV$<br>When $1.5V < V_{OUT}(T) \leq 5.0V$ , HS mode : Accuracy $\pm 2\%$<br>PS mode : Accuracy $+2\%$ or $-3\%$ |
|            |                    | A       | : Output voltage 50mV step setting<br>When $1.2V \leq V_{OUT}(T) \leq 1.5V$ , HS mode : Accuracy $\pm 30mV$<br>PS mode : Accuracy $+30mV$ or $-45mV$<br>When $1.5V < V_{OUT}(T) \leq 5.0V$ , HS mode : Accuracy $\pm 2\%$<br>PS mode : Accuracy $+2\%$ or $-3\%$  |
| ⑤          | Package            | E       | : USP-6C                                                                                                                                                                                                                                                          |
|            |                    | M       | : SOT-25                                                                                                                                                                                                                                                          |
|            |                    | P       | : SOT-89-5                                                                                                                                                                                                                                                        |
| ⑥          | Device Orientation | R       | : Embossed tape, standard feed                                                                                                                                                                                                                                    |
|            |                    | L       | : Embossed tape, reverse feed                                                                                                                                                                                                                                     |

## ■BLOCK DIAGRAMS

### ●XC6207A Series

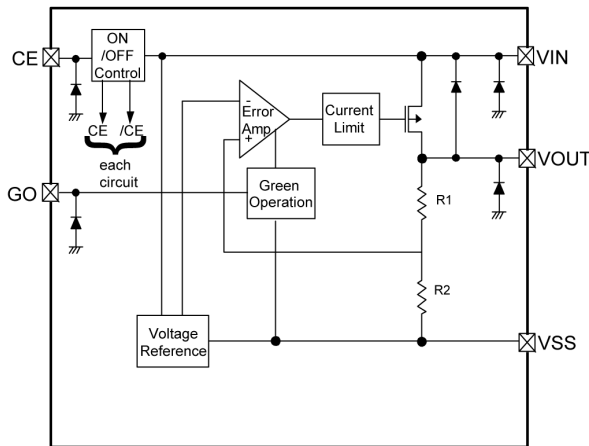

### ●XC6207B Series

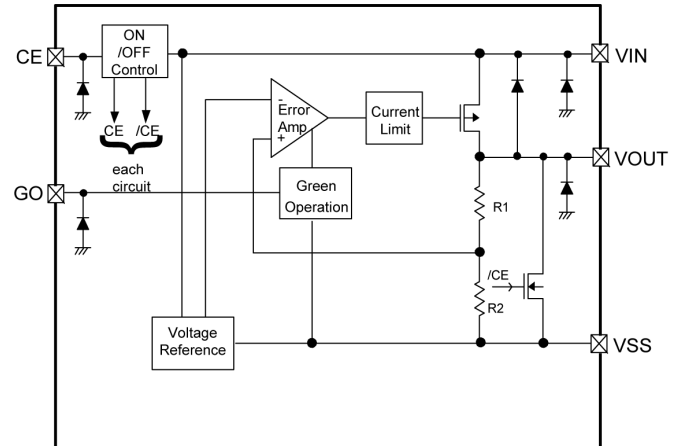

\*Diodes inside the circuit are an ESD protection diode and a parasitic diode.

## ■ABSOLUTE MAXIMUM RATINGS

Ta=25°C

| PARAMETER                     | SYMBOL   | RATINGS               | UNITS |
|-------------------------------|----------|-----------------------|-------|
| Input Voltage                 | VIN      | -0.3 ~ 7.0            | V     |
| Output Current                | IOUT     | 500*                  | mA    |
| Output Voltage                | VOUT     | VSS - 0.3 ~ VIN + 0.3 | V     |
| CE Input Voltage              | VCE      | VSS - 0.3 ~ 7.0       | V     |
| GO Input Voltage              | VGO      | VSS - 0.3 ~ 7.0       | V     |
| Power Dissipation             | SOT-89-5 | 500                   | mW    |
|                               | SOT-25   | 250                   |       |
|                               | USP-6C   | 100                   |       |
| Operational Temperature Range | Topr     | - 40 ~ + 85           | °C    |
| Storage Temperature Range     | Tstg     | - 55 ~ +125           | °C    |

\* IOUT=Pd / (VIN-VOUT)

# ELECTRICAL CHARACTERISTICS

●XC6207A/B series

Ta=25°C

| PARAMETER                                                     | SYMBOL                                               | CONDITIONS                                                                                                                                                                                                      | MIN. | TYP.  | MAX. | UNITS  | CIRCUIT |
|---------------------------------------------------------------|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------|--------|---------|
| Output Voltage                                                | V <sub>OUT</sub> (E)<br>(* 3)                        | V <sub>GO</sub> = V <sub>IN</sub> , V <sub>C</sub> E=V <sub>IN</sub><br>I <sub>OUT</sub> =10mA: High Speed (HS) mode                                                                                            | (*9) | E-0   | (*9) | V      | 1       |
|                                                               |                                                      | V <sub>GO</sub> =V <sub>SS</sub> , V <sub>C</sub> E=V <sub>IN</sub><br>I <sub>OUT</sub> =0.1mA: Power Save (PS) mode                                                                                            | (*9) | E-1   | (*9) |        |         |
| Maximum Output Current                                        | I <sub>OUT</sub> MAX                                 | V <sub>C</sub> E=V <sub>IN</sub>                                                                                                                                                                                | 300  | -     | -    | mA     | 1       |
| Load Regulation                                               | ΔV <sub>OUT</sub>                                    | V <sub>GO</sub> =V <sub>IN</sub> (HS mode), V <sub>C</sub> E=V <sub>IN</sub><br>1mA ≤ I <sub>OUT</sub> ≤ 100mA                                                                                                  | -    | 15    | 60   | mV     | 1       |
| Dropout Voltage (* 4)                                         | V <sub>dif</sub> 1                                   | V <sub>GO</sub> = V <sub>IN</sub> , (HS mode), V <sub>C</sub> E=V <sub>IN</sub> ,<br>I <sub>OUT</sub> =30mA                                                                                                     | E-2  |       |      | mV     | 1       |
|                                                               | V <sub>dif</sub> 2                                   | V <sub>GO</sub> = V <sub>IN</sub> (HS mode), V <sub>C</sub> E=V <sub>IN</sub> ,<br>I <sub>OUT</sub> =100mA                                                                                                      | E-3  |       |      |        |         |
| Supply Current 1                                              | I <sub>SS</sub> 1                                    | V <sub>GO</sub> =V <sub>IN</sub> (HS mode),<br>V <sub>IN</sub> =V <sub>C</sub> E=6.0V, No load                                                                                                                  | 35   | 50    | 80   | μ A    | 2       |
| Supply Current 2                                              | I <sub>SS</sub> 2                                    | V <sub>GO</sub> =V <sub>SS</sub> (PS mode),<br>V <sub>IN</sub> =V <sub>C</sub> E=6.0V, No load                                                                                                                  | -    | 5.5   | 8.0  | μ A    | 2       |
| Standby Current                                               | I <sub>STBY</sub>                                    | V <sub>IN</sub> =6.0V, V <sub>C</sub> E=V <sub>SS</sub>                                                                                                                                                         | -    | 0     | 0.1  | μ A    | 2       |
| Line Regulation<br>1.2V ≤ V <sub>OUT</sub> (T) < 4.5V         | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$ | V <sub>GO</sub> =V <sub>IN</sub> (HS mode),<br>V <sub>OUT</sub> (T)+1.0V ≤ V <sub>IN</sub> ≤ 6.0V<br>V <sub>C</sub> E=V <sub>IN</sub> , I <sub>OUT</sub> =30mA                                                  | -    | 0.01  | 0.20 | % / V  | 1       |
| Line Regulation<br>4.5V ≤ V <sub>OUT</sub> (T) ≤ 5.0V         |                                                      | V <sub>GO</sub> =V <sub>IN</sub> (HS mode)<br>5.5V ≤ V <sub>IN</sub> ≤ 6.0V<br>V <sub>C</sub> E=V <sub>IN</sub> , I <sub>OUT</sub> =30mA                                                                        |      |       |      |        |         |
| Input Voltage                                                 | V <sub>IN</sub>                                      | -                                                                                                                                                                                                               | 2.0  | -     | 6.0  | V      | 1       |
| Output Voltage<br>Temperature Characteristics                 | $\frac{\Delta V_{OUT}}{\Delta T_a \cdot V_{OUT}}$    | V <sub>GO</sub> =V <sub>IN</sub> (HS mode)<br>-40°C ≤ T <sub>a</sub> ≤ 85°C, V <sub>C</sub> E=V <sub>IN</sub> , I <sub>OUT</sub> =30mA                                                                          | -    | ± 100 | -    | ppm/°C | 1       |
| Ripple Rejection Rate<br>1.2V ≤ V <sub>OUT</sub> (T) ≤ 1.25V  | PSRR                                                 | V <sub>GO</sub> = V <sub>IN</sub> (HS mode), V <sub>C</sub> E=V <sub>IN</sub> ,<br>I <sub>OUT</sub> =30mA, V <sub>IN</sub> =2.25V <sub>DC</sub> +0.5V <sub>p</sub> -pAC<br>f=1kHz                               | -    | 70    | -    | dB     | 3       |
| Ripple Rejection Rate<br>1.25V < V <sub>OUT</sub> (T) < 4.75V |                                                      | V <sub>GO</sub> = V <sub>IN</sub> (HS mode),<br>V <sub>C</sub> E=V <sub>IN</sub> , I <sub>OUT</sub> =30mA ,<br>V <sub>IN</sub> = {V <sub>OUT</sub> (T)+1.0V} V <sub>DC</sub> +0.5V <sub>p</sub> -pAC,<br>f=1kHz |      |       |      |        |         |
| Ripple Rejection Rate<br>4.75V ≤ V <sub>OUT</sub> (T) ≤ 5.0V  |                                                      | V <sub>GO</sub> = V <sub>IN</sub> (HS mode), V <sub>C</sub> E=V <sub>IN</sub> ,<br>I <sub>OUT</sub> =30mA, V <sub>IN</sub> =5.75V <sub>DC</sub> +0.5V <sub>p</sub> -pAC<br>f=1kHz                               |      |       |      |        |         |
| Limit Current                                                 | I <sub>lim</sub>                                     | V <sub>GO</sub> = V <sub>IN</sub> (HS mode), V <sub>C</sub> E=V <sub>IN</sub>                                                                                                                                   | 300  | 380   | -    | mA     | 1       |
| Short Current                                                 | I <sub>short</sub>                                   | V <sub>GO</sub> = V <sub>IN</sub> (HS mode), V <sub>C</sub> E=V <sub>IN</sub><br>V <sub>OUT</sub> is short-circuited at the V <sub>SS</sub> level.                                                              | -    | 50    | -    | mA     | 1       |
| PS Switching Current                                          | I <sub>GOR</sub>                                     | V <sub>C</sub> E=V <sub>IN</sub> , V <sub>GO</sub> =V <sub>SS</sub> ,<br>(HS/PS automatic switching)<br>I <sub>OUT</sub> : heavy to light load                                                                  | 0.3  | -     | -    | mA     | 6       |
| HS Switching Current                                          | I <sub>GO</sub>                                      | V <sub>C</sub> E=V <sub>IN</sub> , V <sub>GO</sub> =V <sub>SS</sub><br>(HS/PS automatic switching)<br>I <sub>OUT</sub> : light to heavy load                                                                    | -    | -     | 2.0  | mA     | 6       |

## ■ ELECTRICAL CHARACTERISTICS (Continued)

### ● XC6207A/B series (Continued)

Ta=25°C

| PARAMETER                          | SYMBOL              | CONDITIONS                                                                                                                                                  | MIN. | TYP. | MAX. | UNITS | CIRCUIT |
|------------------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|-------|---------|
| Switch Current Hysteresis Range    | IGO <sub>hys</sub>  | IGO <sub>hys</sub> =IGO- IGOR                                                                                                                               | -    | 1.0  | -    | mA    | 6       |
| PS Switching Delay Time            | TDPS                | V <sub>CE</sub> =V <sub>IN</sub> , V <sub>GO</sub> =V <sub>SS</sub><br>(HS/PS automatic switching)<br>Time until HS mode is changed-over to PS mode by IGOR | -    | -    | 900  | μ sec | 6       |
| CE High Level Voltage              | V <sub>CEH</sub>    | V <sub>GO</sub> =V <sub>IN</sub> , no load<br>Voltage which enters into the state of operation when the CE is applied voltage                               | 1.6  | -    | -    | V     | 4       |
| CE Low Level Voltage               | V <sub>CEL</sub>    | V <sub>GO</sub> =V <sub>IN</sub> , no load<br>Voltage which enters into the state of standby when the CE is applied voltage                                 | -    | -    | 0.25 | V     | 4       |
| GO High Level Voltage (* 7)        | V <sub>GOH</sub>    | V <sub>CE</sub> =V <sub>IN</sub> , no load<br>Voltage which changes into high speed mode when the GO is applied voltage.                                    | 1.6  | -    | -    | V     | 4       |
| GO Low Level Voltage (* 7)         | V <sub>GOL</sub>    | V <sub>CE</sub> =V <sub>IN</sub> , no load<br>Voltage which changes into HS/PS automatic switching mode when the GO is applied voltage.                     | -    | -    | 0.25 | V     | 4       |
| CE High Level Current              | I <sub>CEH</sub>    | V <sub>CE</sub> =V <sub>IN</sub> , V <sub>GO</sub> =V <sub>IN</sub>                                                                                         | -0.1 | -    | 0.1  | μ A   | 5       |
| CE Low Level Current               | I <sub>CEL</sub>    | V <sub>CE</sub> =V <sub>SS</sub> , V <sub>GO</sub> =V <sub>IN</sub>                                                                                         | -0.1 | -    | 0.1  | μ A   | 5       |
| GO High Level Current              | I <sub>GOH</sub>    | V <sub>GO</sub> =V <sub>IN</sub> , V <sub>CE</sub> =V <sub>IN</sub>                                                                                         | -0.1 | -    | 0.1  | μ A   | 5       |
| GO Low Level Current               | I <sub>GOL</sub>    | V <sub>GO</sub> =V <sub>SS</sub> , V <sub>CE</sub> =V <sub>IN</sub> ,                                                                                       | -0.1 | -    | 0.1  | μ A   | 5       |
| CL Auto-Discharge Resistance (* 8) | R <sub>dischg</sub> | V <sub>IN</sub> =6.0V, V <sub>OUT</sub> =6.0V, V <sub>CE</sub> =V <sub>GO</sub> =V <sub>SS</sub>                                                            | -    | 470  | -    | Ω     | 7       |

#### NOTE:

- \* 1: Unless otherwise stated, V<sub>IN</sub>=V<sub>OUT</sub>(T)+1.0V.
- \* 2: V<sub>OUT</sub> (T) = Specified output voltage
- \* 3: V<sub>OUT</sub> (E) = Effective output voltage  
(I.e. the output voltage when an amply stabilized "V<sub>OUT</sub> (T)+1.0V" is provided at the V<sub>IN</sub> pin while maintaining a certain I<sub>OUT</sub> value.)  
High Speed (HS) mode: The voltage of V<sub>GOH</sub> or more is input to the GO pin, or the voltage of V<sub>GOL</sub> or less is input to the GO pin when the output current is IGO or more.  
Power Save (PS) mode: The voltage of V<sub>GOL</sub> or less is input to the GO pin when the output current is IGOR or less.
- \* 4: V<sub>dif</sub>={V<sub>IN</sub>1(\*6)-V<sub>OUT</sub>1(\*5)}
- \* 5: V<sub>OUT</sub>1=A voltage equal to 98% of the output voltage whenever an amply stabilized I<sub>OUT</sub> {V<sub>OUT</sub>(T)+1.0V} is input in the HS mode.
- \* 6: V<sub>IN</sub>1=The input voltage when V<sub>OUT</sub>1 appears as Input Voltage is gradually decreased.
- \* 7: With the GO pin input voltage, the fixed HS mode or Green Operation (GO) is selectable.
- \* 8: For the XC6207B series only. The XC6207A series discharges by resistors R1 and R2 only as shown in the block diagrams.
- \* 9: The rated value of the output voltage when V<sub>OUT</sub>(T)≤1.5V is shown below.  
HS mode : V<sub>OUT</sub> (T)-30mV≤V<sub>OUT</sub> (E)≤V<sub>OUT</sub> (T)+30mV  
PS mode : V<sub>OUT</sub> (T)-45mV≤V<sub>OUT</sub> (E)≤V<sub>OUT</sub> (T)+30mV
- \*10: Recommended conditions for C<sub>IN</sub> and CL  
1.2V≤V<sub>OUT</sub> (T)<1.8V : C<sub>IN</sub>=1.0 μ F, CL=4.7 μ F (ceramic cap.)  
1.8V≤V<sub>OUT</sub> (T)<2.5V : C<sub>IN</sub>=1.0 μ F, CL=1.0 μ F (ceramic cap.)  
2.5V≤V<sub>OUT</sub> (T)≤5.0V : C<sub>IN</sub>=2.2 μ F, CL=1.0 μ F (ceramic cap.)

# DROPOUT VOLTAGE CHART

| SYMBOL                           | E-0                                |      |       | E-1                                |      |       | E-2                                    |      | E-3                                     |      |
|----------------------------------|------------------------------------|------|-------|------------------------------------|------|-------|----------------------------------------|------|-----------------------------------------|------|
| SETTING<br>OUTPUT VOLTAGE<br>(V) | OUTPUT VOLTAGE<br>(HS MODE)<br>(V) |      |       | OUTPUT VOLTAGE<br>(PS MODE)<br>(V) |      |       | DROPOUT<br>VOLTAGE 1<br>IOUT=30mA (mV) |      | DROPOUT<br>VOLTAGE 2<br>IOUT=100mA (mV) |      |
| VOUT (T)                         | Vout(E)                            |      |       | Vout(E)                            |      |       | Vdif1                                  |      | Vdif2                                   |      |
|                                  | MIN.                               | TYP. | MAX.  | MIN.                               | TYP. | MAX.  | TYP.                                   | MAX. | TYP.                                    | MAX. |
| 1.20                             | 1.170                              | 1.20 | 1.230 | 1.1550                             | 1.20 | 1.230 | 800                                    | 850  | 810                                     | 860  |
| 1.25                             | 1.220                              | 1.25 | 1.280 | 1.2050                             | 1.25 | 1.280 |                                        |      |                                         |      |
| 1.30                             | 1.270                              | 1.30 | 1.330 | 1.2550                             | 1.30 | 1.330 | 700                                    | 750  | 710                                     | 760  |
| 1.35                             | 1.320                              | 1.35 | 1.380 | 1.3050                             | 1.35 | 1.380 |                                        |      |                                         |      |
| 1.40                             | 1.370                              | 1.40 | 1.430 | 1.3550                             | 1.40 | 1.430 | 600                                    | 650  | 610                                     | 660  |
| 1.45                             | 1.420                              | 1.45 | 1.480 | 1.4050                             | 1.45 | 1.480 |                                        |      |                                         |      |
| 1.50                             | 1.470                              | 1.50 | 1.530 | 1.4550                             | 1.50 | 1.530 | 500                                    | 550  | 510                                     | 560  |
| 1.55                             | 1.519                              | 1.55 | 1.581 | 1.5035                             | 1.55 | 1.581 |                                        |      |                                         |      |
| 1.60                             | 1.568                              | 1.60 | 1.632 | 1.5520                             | 1.60 | 1.632 | 400                                    | 450  | 410                                     | 460  |
| 1.65                             | 1.617                              | 1.65 | 1.683 | 1.6005                             | 1.65 | 1.683 |                                        |      |                                         |      |
| 1.70                             | 1.666                              | 1.70 | 1.734 | 1.6490                             | 1.70 | 1.734 | 300                                    | 350  | 310                                     | 360  |
| 1.75                             | 1.715                              | 1.75 | 1.785 | 1.6975                             | 1.75 | 1.785 |                                        |      |                                         |      |
| 1.80                             | 1.764                              | 1.80 | 1.836 | 1.7460                             | 1.80 | 1.836 | 200                                    | 250  | 210                                     | 260  |
| 1.85                             | 1.813                              | 1.85 | 1.887 | 1.7945                             | 1.85 | 1.887 |                                        |      |                                         |      |
| 1.90                             | 1.862                              | 1.90 | 1.938 | 1.8430                             | 1.90 | 1.938 | 100                                    | 150  | 200                                     | 250  |
| 1.95                             | 1.911                              | 1.95 | 1.989 | 1.8915                             | 1.95 | 1.989 |                                        |      |                                         |      |
| 2.00                             | 1.960                              | 2.00 | 2.040 | 1.9400                             | 2.00 | 2.040 | 60                                     | 90   | 180                                     | 245  |
| 2.05                             | 2.009                              | 2.05 | 2.091 | 1.9885                             | 2.05 | 2.091 |                                        |      |                                         |      |
| 2.10                             | 2.058                              | 2.10 | 2.142 | 2.0370                             | 2.10 | 2.142 |                                        |      |                                         |      |
| 2.15                             | 2.107                              | 2.15 | 2.193 | 2.0855                             | 2.15 | 2.193 |                                        |      |                                         |      |
| 2.20                             | 2.156                              | 2.20 | 2.244 | 2.1340                             | 2.20 | 2.244 |                                        | 80   |                                         | 240  |
| 2.25                             | 2.205                              | 2.25 | 2.295 | 2.1825                             | 2.25 | 2.295 |                                        |      |                                         |      |
| 2.30                             | 2.254                              | 2.30 | 2.346 | 2.2310                             | 2.30 | 2.346 |                                        |      |                                         |      |
| 2.35                             | 2.303                              | 2.35 | 2.397 | 2.2795                             | 2.35 | 2.397 |                                        |      |                                         |      |
| 2.40                             | 2.352                              | 2.40 | 2.448 | 2.3280                             | 2.40 | 2.448 | 50                                     | 70   | 150                                     | 220  |
| 2.45                             | 2.401                              | 2.45 | 2.499 | 2.3765                             | 2.45 | 2.499 |                                        |      |                                         |      |
| 2.50                             | 2.450                              | 2.50 | 2.550 | 2.4250                             | 2.50 | 2.550 |                                        |      |                                         |      |
| 2.55                             | 2.499                              | 2.55 | 2.601 | 2.4735                             | 2.55 | 2.601 |                                        |      |                                         |      |
| 2.60                             | 2.548                              | 2.60 | 2.652 | 2.5220                             | 2.60 | 2.652 |                                        |      |                                         |      |
| 2.65                             | 2.597                              | 2.65 | 2.703 | 2.5705                             | 2.65 | 2.703 |                                        |      |                                         |      |
| 2.70                             | 2.646                              | 2.70 | 2.754 | 2.6190                             | 2.70 | 2.754 |                                        |      |                                         |      |
| 2.75                             | 2.695                              | 2.75 | 2.805 | 2.6675                             | 2.75 | 2.805 |                                        |      |                                         |      |
| 2.80                             | 2.744                              | 2.80 | 2.856 | 2.7160                             | 2.80 | 2.856 | 40                                     | 65   | 120                                     | 190  |
| 2.85                             | 2.793                              | 2.85 | 2.907 | 2.7645                             | 2.85 | 2.907 |                                        |      |                                         |      |
| 2.90                             | 2.842                              | 2.90 | 2.958 | 2.8130                             | 2.90 | 2.958 |                                        |      |                                         |      |
| 2.95                             | 2.891                              | 2.95 | 3.009 | 2.8615                             | 2.95 | 3.009 |                                        |      |                                         |      |
| 3.00                             | 2.940                              | 3.00 | 3.060 | 2.9100                             | 3.00 | 3.060 |                                        |      |                                         |      |
| 3.05                             | 2.989                              | 3.05 | 3.111 | 2.9585                             | 3.05 | 3.111 |                                        |      |                                         |      |
| 3.10                             | 3.038                              | 3.10 | 3.162 | 3.0070                             | 3.10 | 3.162 |                                        |      |                                         |      |
| 3.15                             | 3.087                              | 3.15 | 3.213 | 3.0555                             | 3.15 | 3.213 |                                        |      |                                         |      |
| 3.20                             | 3.136                              | 3.20 | 3.264 | 3.1040                             | 3.20 | 3.264 | 30                                     | 35   | 40                                      | 45   |
| 3.25                             | 3.185                              | 3.25 | 3.315 | 3.1525                             | 3.25 | 3.315 |                                        |      |                                         |      |
| 3.30                             | 3.234                              | 3.30 | 3.366 | 3.2010                             | 3.30 | 3.366 |                                        |      |                                         |      |
| 3.35                             | 3.283                              | 3.35 | 3.417 | 3.2495                             | 3.35 | 3.417 |                                        |      |                                         |      |
| 3.40                             | 3.332                              | 3.40 | 3.468 | 3.2980                             | 3.40 | 3.468 | 20                                     | 25   | 30                                      | 35   |
|                                  |                                    |      |       |                                    |      |       |                                        |      |                                         |      |
|                                  |                                    |      |       |                                    |      |       |                                        |      |                                         |      |
|                                  |                                    |      |       |                                    |      |       |                                        |      |                                         |      |


## ■ DROPOUT VOLTAGE CHART (Continued)

| SYMBOL                           | E-0                                |      |       | E-1                                |      |       | E-2                                    |      | E-3                                     |      |
|----------------------------------|------------------------------------|------|-------|------------------------------------|------|-------|----------------------------------------|------|-----------------------------------------|------|
| SETTING<br>OUTPUT VOLTAGE<br>(V) | OUTPUT VOLTAGE<br>(HS MODE)<br>(V) |      |       | OUTPUT VOLTAGE<br>(PS MODE)<br>(V) |      |       | DROPOUT<br>VOLTAGE 1<br>IOUT=30mA (mV) |      | DROPOUT<br>VOLTAGE 2<br>IOUT=100mA (mV) |      |
| VOUT (T)                         | Vout(E)                            |      |       | Vout(E)                            |      |       | Vdif1                                  |      | Vdif2                                   |      |
|                                  | MIN.                               | TYP. | MAX.  | MIN.                               | TYP. | MAX.  | TYP.                                   | MAX. | TYP.                                    | MAX. |
| 3.45                             | 3.381                              | 3.45 | 3.519 | 3.3465                             | 3.45 | 3.519 | 40                                     | 65   | 120                                     | 190  |
| 3.50                             | 3.430                              | 3.50 | 3.570 | 3.3950                             | 3.50 | 3.570 |                                        |      |                                         |      |
| 3.55                             | 3.479                              | 3.55 | 3.621 | 3.4435                             | 3.55 | 3.621 |                                        |      |                                         |      |
| 3.60                             | 3.528                              | 3.60 | 3.672 | 3.4920                             | 3.60 | 3.672 |                                        |      |                                         |      |
| 3.65                             | 3.577                              | 3.65 | 3.723 | 3.5405                             | 3.65 | 3.723 |                                        |      |                                         |      |
| 3.70                             | 3.626                              | 3.70 | 3.774 | 3.5890                             | 3.70 | 3.774 |                                        |      |                                         |      |
| 3.75                             | 3.675                              | 3.75 | 3.825 | 3.6375                             | 3.75 | 3.825 |                                        |      |                                         |      |
| 3.80                             | 3.724                              | 3.80 | 3.876 | 3.6860                             | 3.80 | 3.876 |                                        |      |                                         |      |
| 3.85                             | 3.773                              | 3.85 | 3.927 | 3.7345                             | 3.85 | 3.927 |                                        |      |                                         |      |
| 3.90                             | 3.822                              | 3.90 | 3.978 | 3.7830                             | 3.90 | 3.978 |                                        |      |                                         |      |
| 3.95                             | 3.871                              | 3.95 | 4.029 | 3.8315                             | 3.95 | 4.029 |                                        |      |                                         |      |
| 4.00                             | 3.920                              | 4.00 | 4.080 | 3.8800                             | 4.00 | 4.080 |                                        |      |                                         |      |
| 4.05                             | 3.969                              | 4.05 | 4.131 | 3.9285                             | 4.05 | 4.131 |                                        |      |                                         |      |
| 4.10                             | 4.018                              | 4.10 | 4.182 | 3.9770                             | 4.10 | 4.182 |                                        |      |                                         |      |
| 4.15                             | 4.067                              | 4.15 | 4.233 | 4.0255                             | 4.15 | 4.233 |                                        |      |                                         |      |
| 4.20                             | 4.116                              | 4.20 | 4.284 | 4.0740                             | 4.20 | 4.284 |                                        |      |                                         |      |
| 4.25                             | 4.165                              | 4.25 | 4.335 | 4.1225                             | 4.25 | 4.335 |                                        |      |                                         |      |
| 4.30                             | 4.214                              | 4.30 | 4.386 | 4.1710                             | 4.30 | 4.386 |                                        |      |                                         |      |
| 4.35                             | 4.263                              | 4.35 | 4.437 | 4.2195                             | 4.35 | 4.437 |                                        |      |                                         |      |
| 4.40                             | 4.312                              | 4.40 | 4.488 | 4.2680                             | 4.40 | 4.488 |                                        |      |                                         |      |
| 4.45                             | 4.361                              | 4.45 | 4.539 | 4.3165                             | 4.45 | 4.539 |                                        |      |                                         |      |
| 4.50                             | 4.410                              | 4.50 | 4.590 | 4.3650                             | 4.50 | 4.590 |                                        |      |                                         |      |
| 4.55                             | 4.459                              | 4.55 | 4.641 | 4.4135                             | 4.55 | 4.641 |                                        |      |                                         |      |
| 4.60                             | 4.508                              | 4.60 | 4.692 | 4.4620                             | 4.60 | 4.692 |                                        |      |                                         |      |
| 4.65                             | 4.557                              | 4.65 | 4.743 | 4.5105                             | 4.65 | 4.743 |                                        |      |                                         |      |
| 4.70                             | 4.606                              | 4.70 | 4.794 | 4.5590                             | 4.70 | 4.794 |                                        |      |                                         |      |
| 4.75                             | 4.655                              | 4.75 | 4.845 | 4.6075                             | 4.75 | 4.845 |                                        |      |                                         |      |
| 4.80                             | 4.704                              | 4.80 | 4.896 | 4.6560                             | 4.80 | 4.896 |                                        |      |                                         |      |
| 4.85                             | 4.753                              | 4.85 | 4.947 | 4.7045                             | 4.85 | 4.947 |                                        |      |                                         |      |
| 4.90                             | 4.802                              | 4.90 | 4.998 | 4.7530                             | 4.90 | 4.998 |                                        |      |                                         |      |
| 4.95                             | 4.851                              | 4.95 | 5.049 | 4.8015                             | 4.95 | 5.049 |                                        |      |                                         |      |
| 5.00                             | 4.900                              | 5.00 | 5.100 | 4.8500                             | 5.00 | 5.100 |                                        |      |                                         |      |

## ■ OPERATIONAL EXPLANATION

### <Output Voltage Control>

The voltage divided by resistors R1 & R2 is compared with the internal reference voltage by the error amplifier. The P-channel MOSFET, which is connected to the VOUT pin, is then driven by the subsequent output signal. The output voltage at the VOUT pin is controlled & stabilized by a system of negative feedback. The current limit circuit and short protect circuit operate in relation to the level of output current. The GO function monitors the output current and switches a supply current to two values according to the level of output current. Further, the IC's internal circuitry can be shutdown via the CE pin's signal.

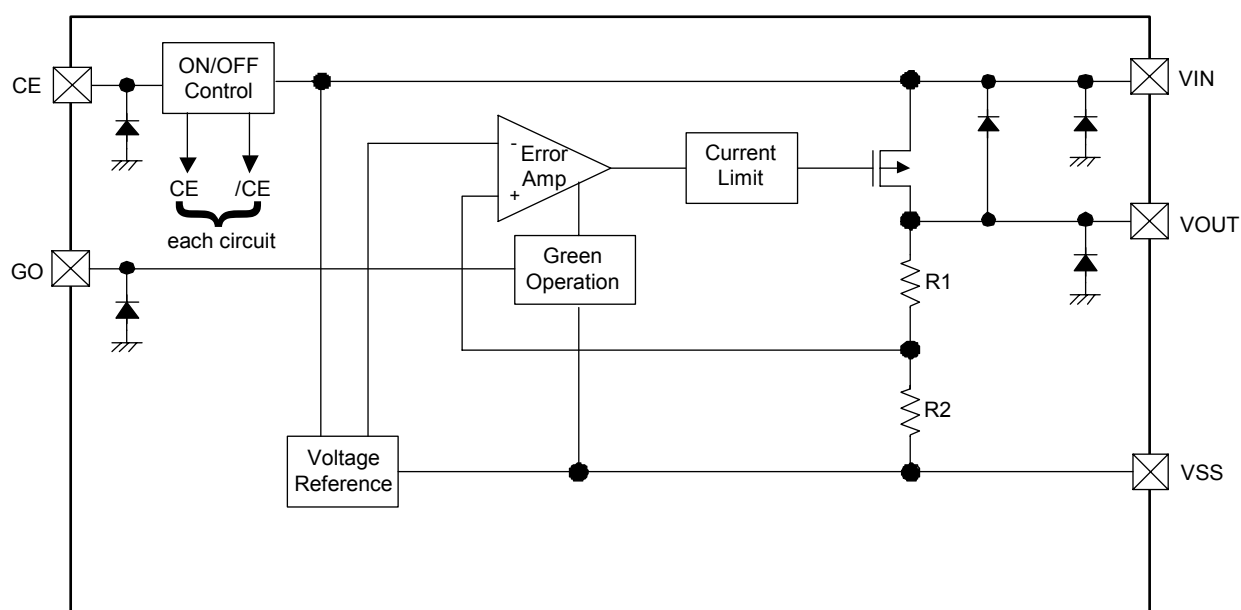

### <Green Operation>

XC6207 series can be set as a fixed high-speed mode or a green operation (GO) mode via a signal to the green operation (GO) pin. Under the condition that the output current becomes IGOR or less, the IC operates in the fixed high-speed mode when the GO pin is at high level and the IC operates in the power save (PS) mode when the GO pin is at low level. The GO mode enables the IC to switch automatically the supply current to the high speed (HS) mode or the power save (PS) mode according to the level of output current. While having both high-speed operation and low supply current state, the XC6207 series can acquire high efficiency. At the HS/PS automatic switching mode (GO mode), the switching point of the HS mode and the PS mode is being fixed inside the IC. When the output current becomes IGOR 0.3mA (TYP.) or below, the mode changes automatically to the PS mode after the delay time of hundreds  $\mu\text{sec}$ (s), and it can reduce supply current in light load. For applications, most of portable equipment control the system current, which is the output current to the IC, and control the supply current according to the system condition. Furthermore, the high-speed operation might be required. In such a case, at the automatic switching mode (GO mode), when the output current becomes IGO or more, the mode will automatically switch to the HS mode. In the HS mode, the response of the output voltage during the output current fluctuation is better than the PS mode. Automatic switching PS mode to HS mode causes the switching delay time of tens of  $\mu\text{sec}$ (s), the output voltage drops more than in the fixed HS mode. If the GO pin voltage is at high level {tens of  $\mu\text{sec}$ (s) before the output current fluctuation occurs} and the IC is used in the HS mode, the output current fluctuation will be suppressed to as low as the fixed HS mode. (cf. the following item: Load Transient Response by Switching Mode with GO pin.)

The output current at the HS/PS mode should be adjusted to 2.0mA or more / 0.3mA or less respectively when you use the IC in the HS/PS automatic switching mode (GO mode).

It is suggested that you use this IC with either a VIN voltage or a VSS voltage input at the GO pin. If this IC is used with the correct specifications for the GO pin, the IC will operate normally. However, supply current may increase as a result of through current in the IC's internal circuitry when medium voltage is input.


## ■ OPERATIONAL EXPLANATION (Continued)

### <Green Operation> (Continued)

#### ● Load Transient Response by Switching Mode


○ GO mode (GO pin voltage: Low)

Output Current:  $I_{OUT}=0.1\text{mA}\leftrightarrow 100\text{mA}$

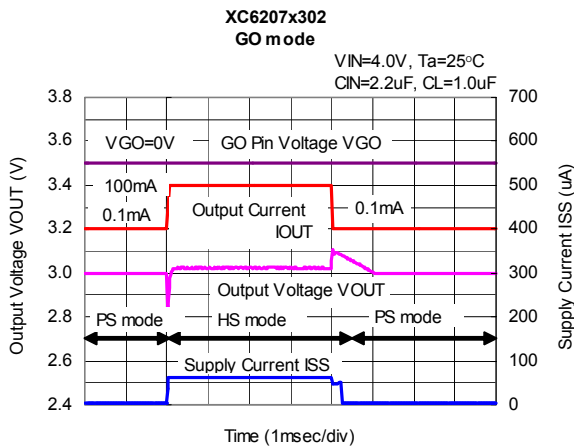

○ Fixed high speed mode via GO pin signal (GO pin voltage: Low to High)


Output Current:  $I_{OUT}=0.1\text{mA}\leftrightarrow 100\text{mA}$

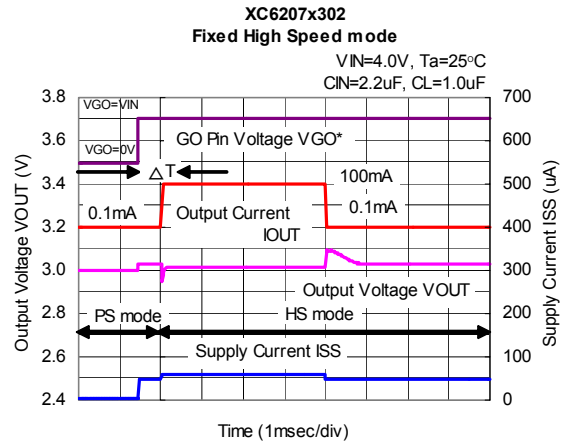

\*Note: Input a "H" level signal to the GO pin before the output current fluctuation ( $\Delta T$ ) occurs.


○ GO mode (GO pin voltage: Low)

Output Current:  $I_{OUT}=0.1\text{mA}\leftrightarrow 5\text{mA}$

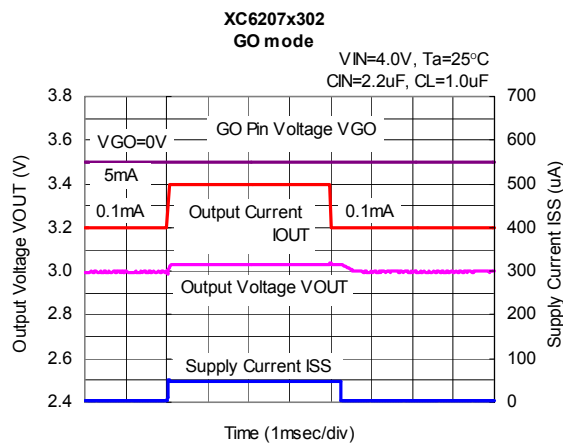

○ Fixed high speed mode via GO pin signal (GO pin voltage: Low to High)

Output Current:  $I_{OUT}=0.1\text{mA}\leftrightarrow 5\text{mA}$

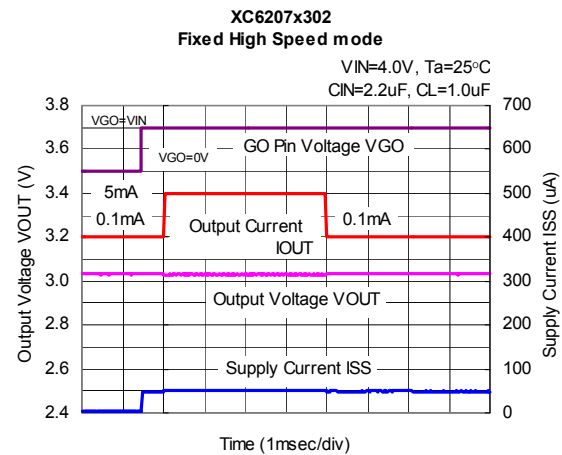

### <Low ESR capacitor>

With the XC6207 series, a stable output voltage is achievable even if used with low ESR capacitors, as a phase compensation circuit is built-in. In order to ensure the effectiveness of the phase compensation, we suggest that an output capacitor ( $C_L$ ) is connected as close as possible to the output pin ( $V_{OUT}$ ) and the  $V_{SS}$  pin. Please use an output capacitor with a capacitance value of at least  $1\mu\text{F}$  when the setting output voltage ( $V_{OUT}(T)$ ) is less than or equal to  $1.8\text{V}$ . Also, when the setting output voltage ( $V_{OUT}(T)$ ) is less than or equal to  $2.5\text{V}$ , please connect an input capacitor ( $C_{IN}$ ) of  $2.2\mu\text{F}$  between the  $V_{IN}$  pin and the  $V_{SS}$  pin in order to ensure a stable power input.

### <Recommended conditions of $C_{IN}$ and $C_L$ >

| SETTING VOLTAGE | $C_{IN}$ ( $\mu\text{F}$ ) | $C_L$ ( $\mu\text{F}$ ) |
|-----------------|----------------------------|-------------------------|
| 1.2V ~ 1.7V     | 1.0                        | 4.7                     |
| 1.8V ~ 2.4V     | 1.0                        | 1.0                     |
| 2.5V ~ 5.0V     | 2.2                        | 1.0                     |

## ■ OPERATIONAL EXPLANATION (Continued)

### <CL Auto-Discharge Function>

XC6207B series can quickly discharge the electric charge at the output capacitor (CL), when a low signal to the CE pin, which enables a whole IC circuit put into OFF state, is inputted via the N-channel transistor located between the V<sub>OUT</sub> pin and the V<sub>SS</sub> pin (cf. BLOCK DIAGRAM). In this state, the application is protected from a glitch operation caused by the electric charge at the output capacitor (CL). The CL auto-discharge resistance at this time depends on the input voltage. Moreover, discharge time of the output capacitor (CL) is set by the CL auto-discharge resistance (R) and the output capacitor (CL). By setting time constant of a CL auto-discharge resistance value [R] and an output capacitor value (CL) as  $\tau$  ( $\tau = C \times R$ ), the output voltage after discharge via the N channel transistor is calculated by the following formulas.

$$V = V_{OUT} \times e^{-t/\tau}, \quad \text{or} \quad t = \tau \ln (V / V_{OUT})$$

( V : Output voltage after discharge, V<sub>OUT(E)</sub> : Output voltage, t: Discharge time,  
 $\tau$  : CL auto-discharge resistance R × Output capacitor (CL) value C)


T<sub>a</sub>=25°C

| INPUT VOLTAGE | CL AUTO-DISCHARGE RESISTANCE |
|---------------|------------------------------|
| 2.0V          | 750 Ω (TYP.)                 |
| 3.0V          | 550 Ω (TYP.)                 |
| 4.0V          | 500 Ω (TYP.)                 |
| 5.0V          | 480 Ω (TYP.)                 |
| 6.0V          | 470 Ω (TYP.)                 |

(ex.) When input voltage: 4.0V, CL auto-discharge resistance: 500 Ω (TYP.); output capacitor (CL): 10 μF, V<sub>OUT</sub>:3.0V,  
 CE voltage=Changing from 4.0V to 0V (CE pin L level signal)

- 1  $\tau$  (500 μ sec) after CE OFF signal is inputted, V<sub>OUT(E)</sub> becomes: 3.0V × 0.368 = approx. 1.104V
- 2  $\tau$  (1000 μ sec) after CE OFF signal is inputted, V<sub>OUT(E)</sub> becomes: 3.0V × 0.135 = approx. 0.405V
- 3  $\tau$  (1500 μ sec) after CE OFF signal is inputted, V<sub>OUT(E)</sub> becomes: 3.0V × 0.050 = approx. 0.150V
- 4  $\tau$  (2000 μ sec) after CE OFF signal is inputted, V<sub>OUT(E)</sub> becomes: 3.0V × 0.018 = approx. 0.055V

### OUTPUT VOLTAGE DISCHARGE CHARACTERISTICS

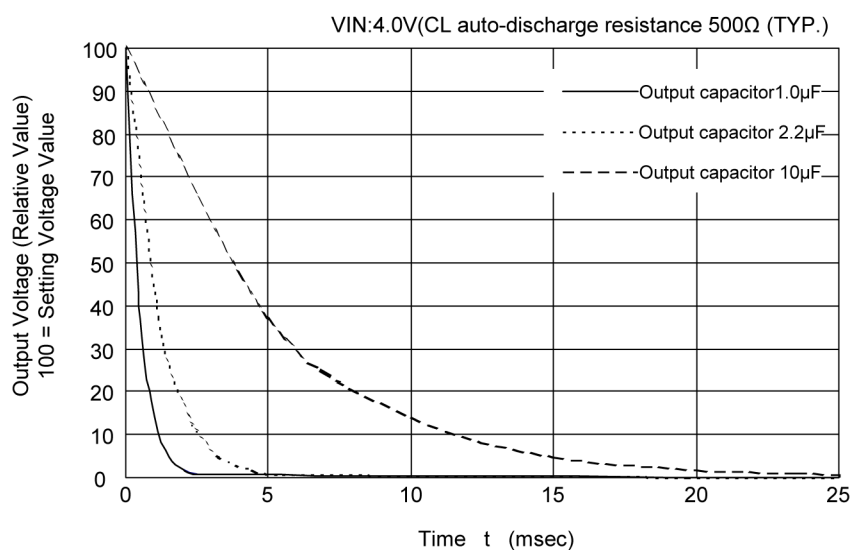

## ■ OPERATIONAL EXPLANATION (Continued)

### <Current Limiter, Short-Circuit Protection>

The XC6207 series includes a combination of a fixed current limiter circuit & a foldback circuit, which aid the operations of the current limiter and circuit protection. When the load current reaches the current limit level, the fixed current limiter circuit operates and output voltage drops. As a result of this drop in output voltage, the foldback circuit operates, output voltage drops further and output current decreases. When the output pin is shorted, a current of about 50mA flows.

### <CE Pin>


The IC's internal circuitry can be shutdown via the signal from the CE pin with the XC6207 series. In shutdown mode, output at the V<sub>OUT</sub> pin will be pulled down to the V<sub>SS</sub> level via R1 & R2. However, as for the XC6207B series, the CL auto-discharge resistor is connected in parallel to R1 and R2 while the power supply is applied to the V<sub>IN</sub> pin. Therefore, time until the V<sub>OUT</sub> pin reaches the V<sub>SS</sub> level becomes short. Although the CE pin is equal to an inverter input with CMOS hysteresis, with either the pull-up or pull-down options, the CE pin input current will increase when the IC is in operation. We suggest that you use this IC with either a V<sub>IN</sub> voltage or a V<sub>SS</sub> voltage input at the CE pin. If this IC is used with the correct specifications for the CE pin, the IC will operate normally. However, supply current may increase as a result of through current in the IC's internal circuitry when medium voltage is input.

## ■ NOTES ON USE


1. Please use this IC within the stated absolute maximum ratings. The IC is liable to malfunction should the ratings be exceeded.
2. Where wiring impedance is high, operations may become unstable due to noise and/or phase lag depending on output current. Please strengthen V<sub>IN</sub> and V<sub>SS</sub> wiring in particular.
3. Please wire the input capacitor (C<sub>IN</sub>) and the output capacitor (C<sub>L</sub>) as close to the IC as possible.

## ■ TEST CIRCUITS


Circuit 1 Output Voltage, Input Operating Voltage, Dropout Voltage, Line Regulation, Load Regulation, Limit Current, Short Current

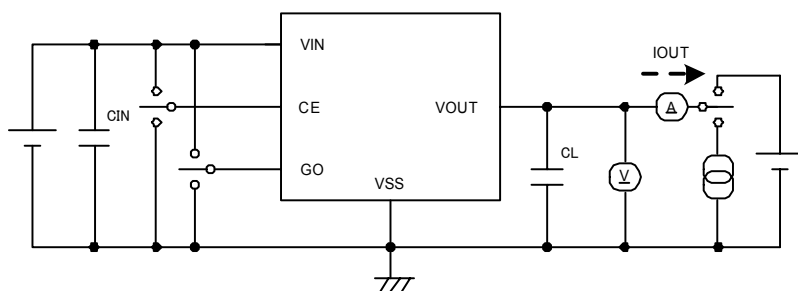


Circuit 2 Supply Current, Standby Current

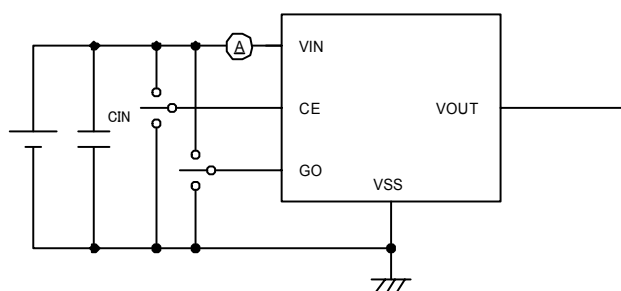


Circuit 3 Ripple Rejection Rate

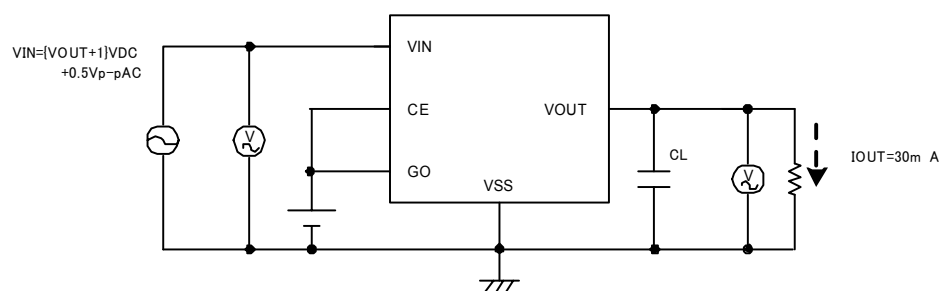


Circuit 4 CE/GO, High & Low Level Voltage

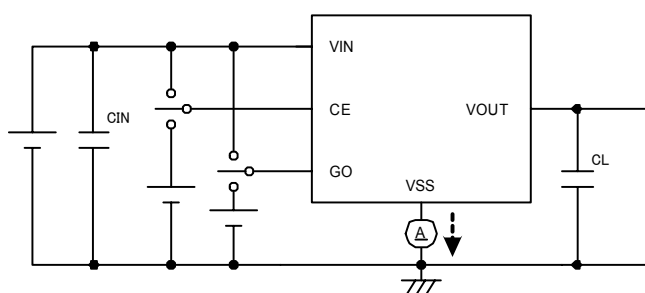


Circuit 6 HS/PS Switching Current, PS Switching Delay Time

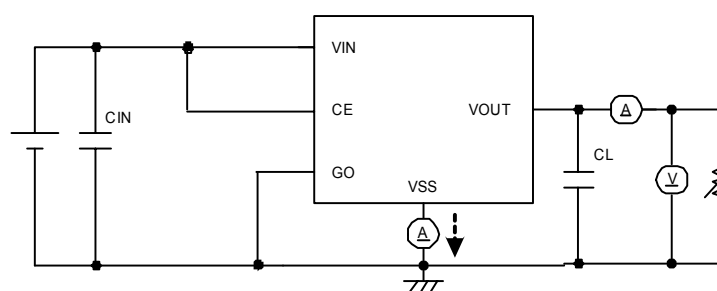

Circuit 5 CE/GO, High & Low Level Current

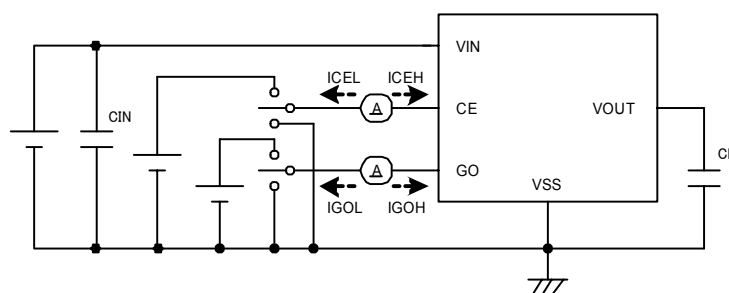







Circuit 7 CL Auto-Discharge Resistance Current

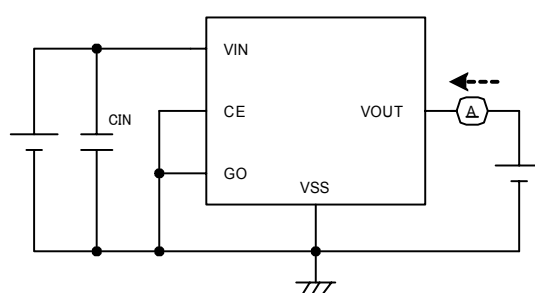

Note : For the capacity of the CIN and the CL, the recommended capacity depending on the set voltage should be used.



## TYPICAL PERFORMANCE CHARACTERISTICS

### (1) Output Voltage vs. Input Voltage

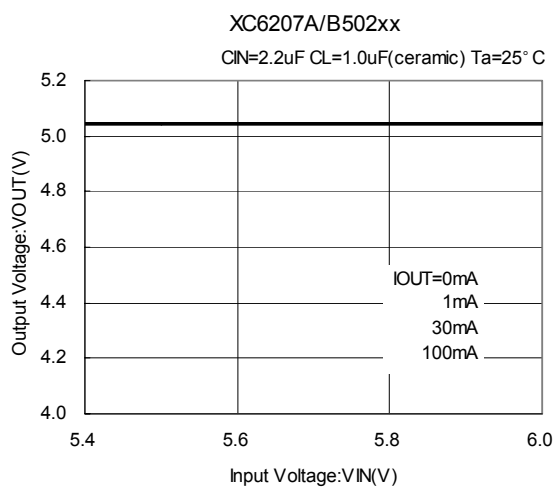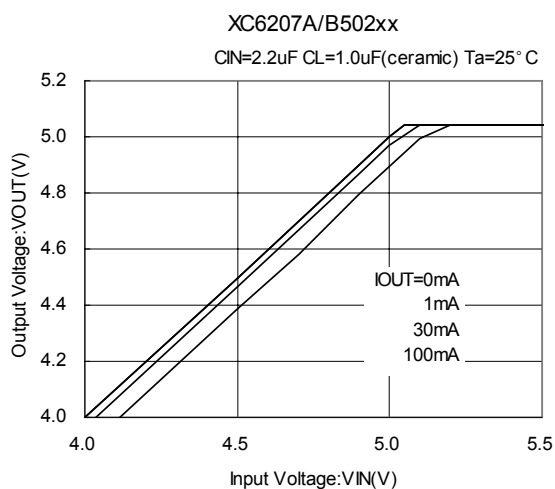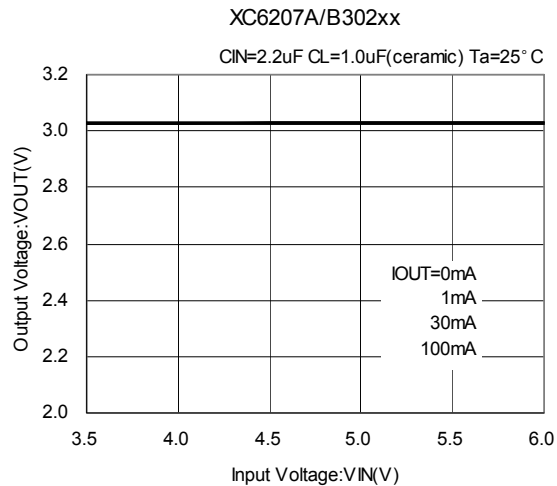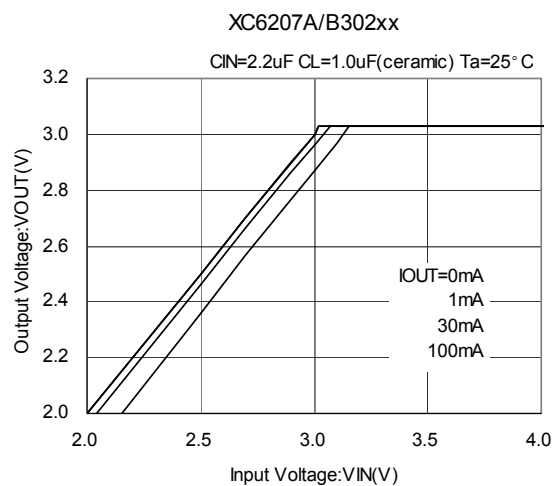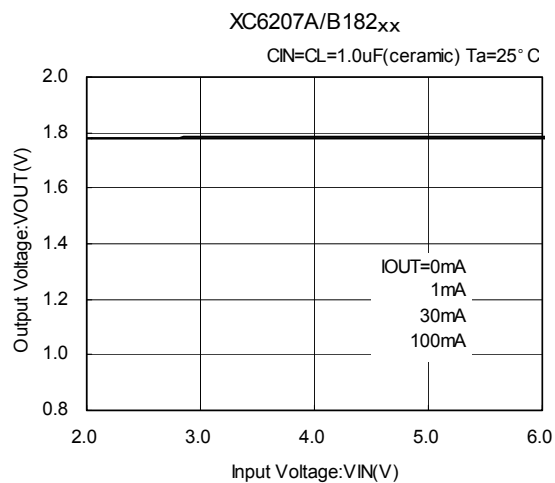
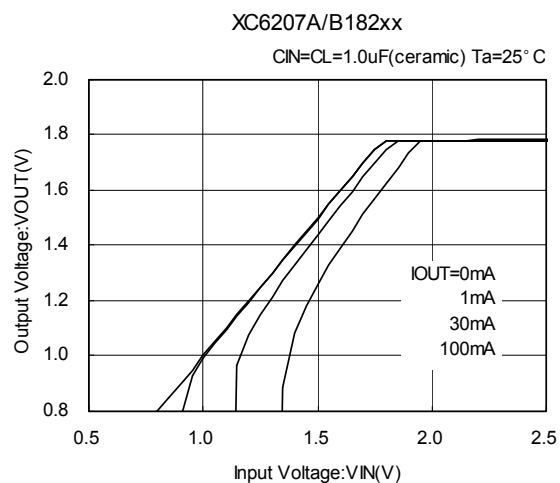


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)



### (2) Dropout Voltage vs. Output Current

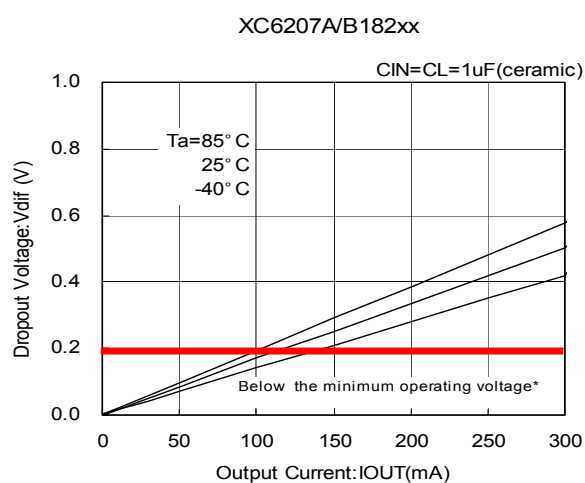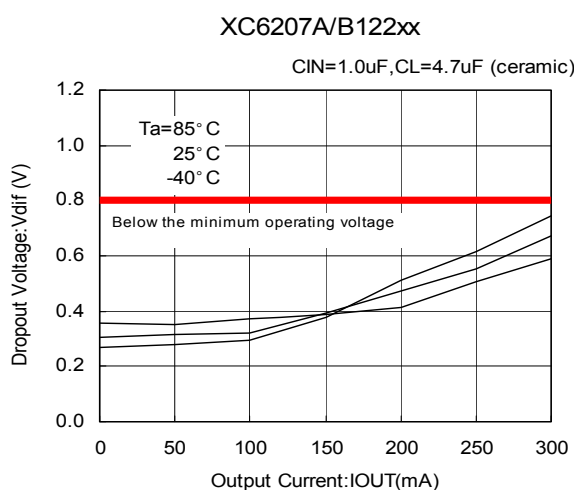

\*The characteristic when Vdif is lower than 0.2V is the reference characteristic below the minimum operating voltage.



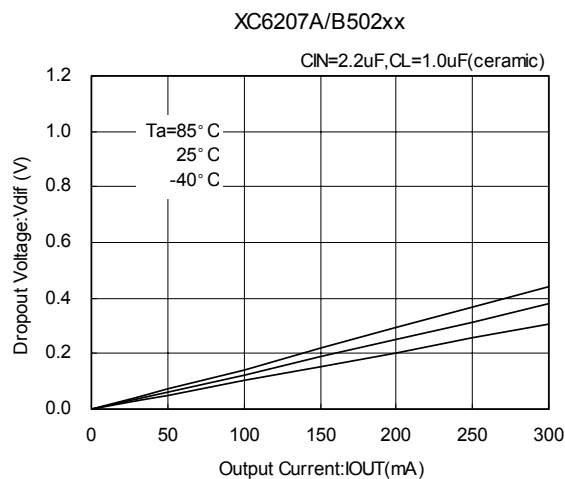
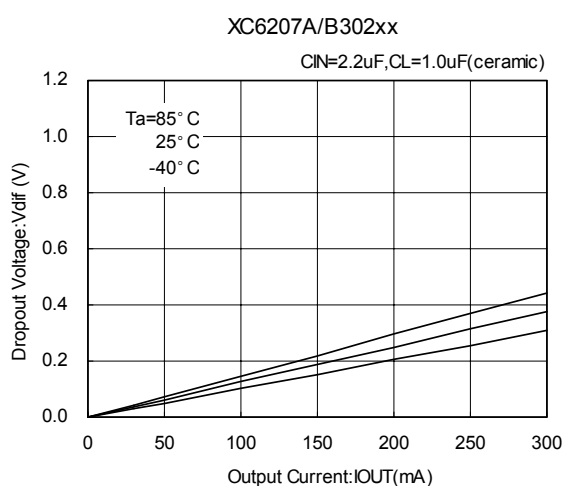


### (3) Supply Current vs. Input Voltage

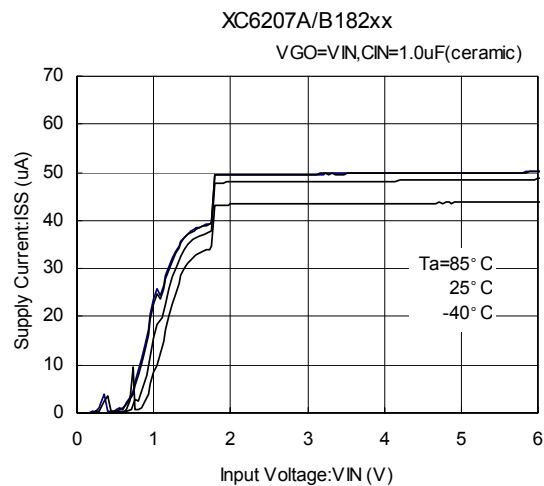
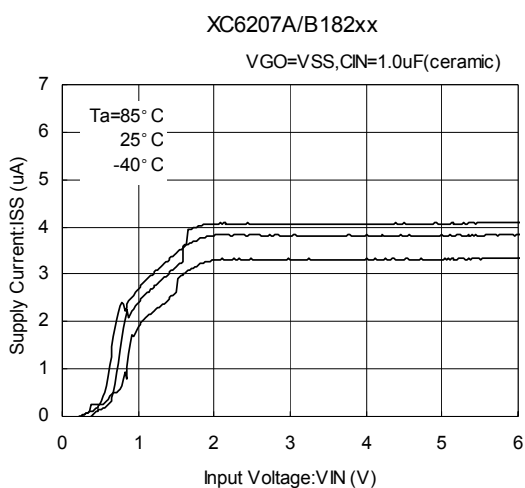


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (3) Supply Current vs. Input Voltage (Continued)

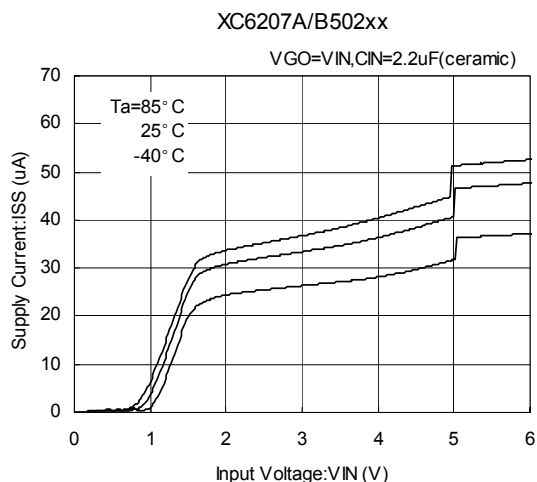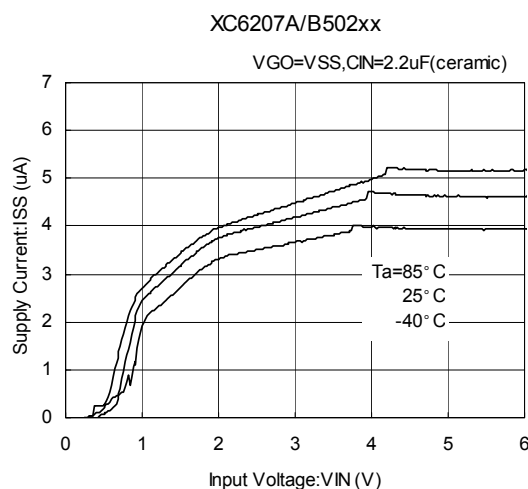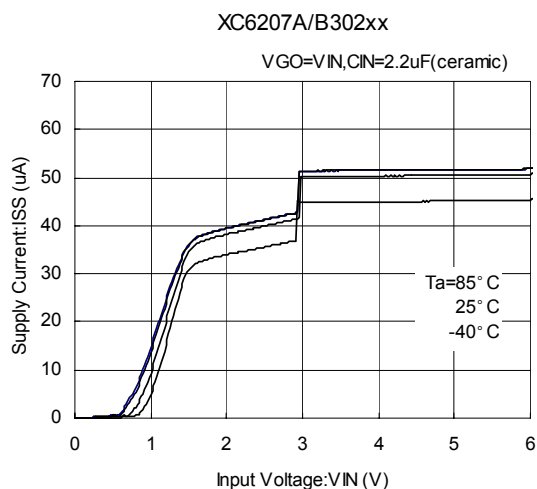
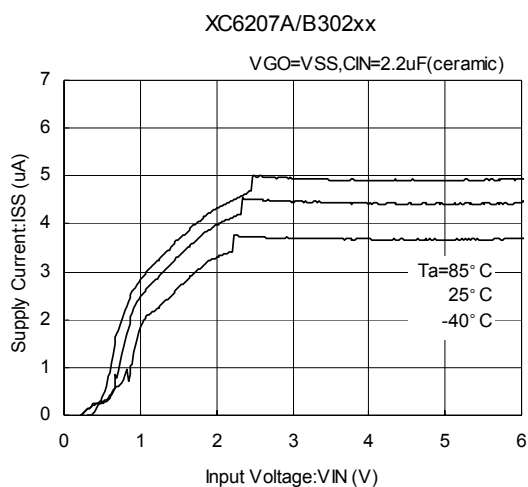


### (4) Current Limiter Circuit

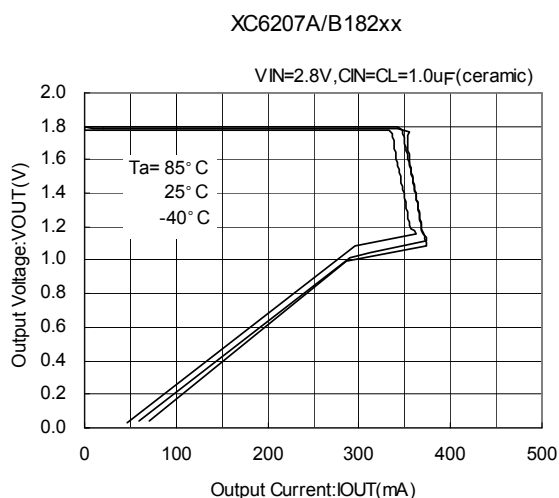
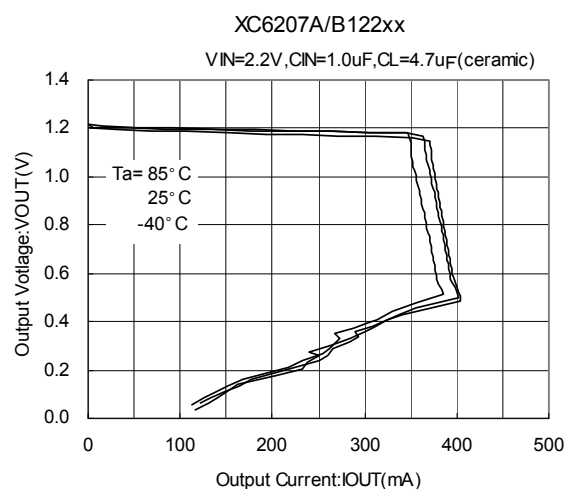


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


### (4) Current Limiter Circuit (Continued)

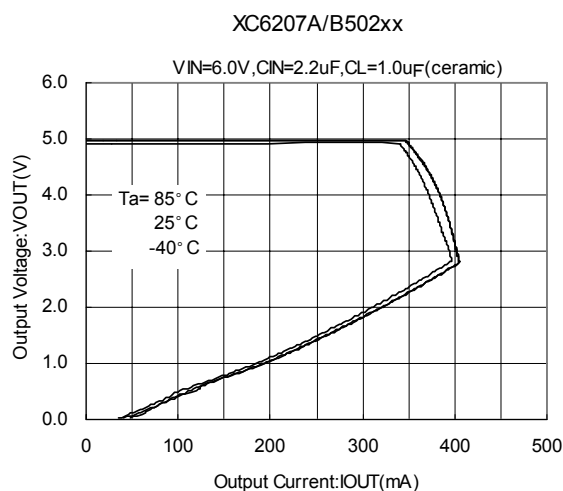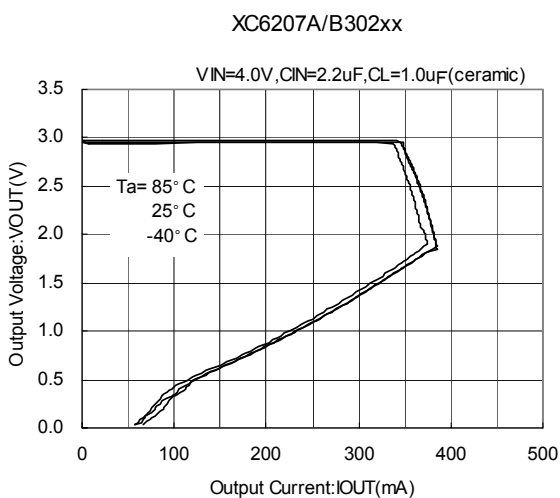


### (5) High speed / Power Save Switching Current

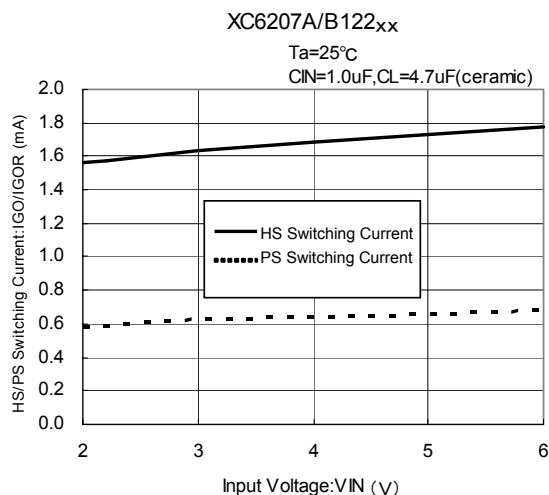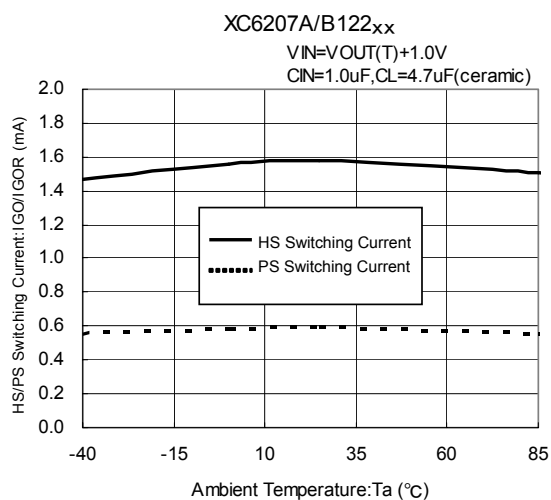

### (6) Power Save Switching Delay Time






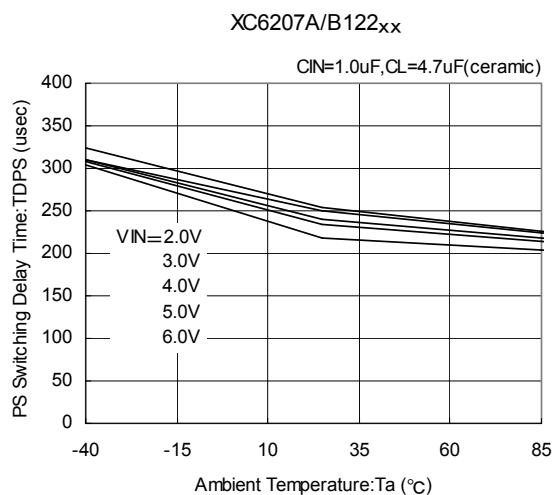


### (7) CL Discharge Resistance

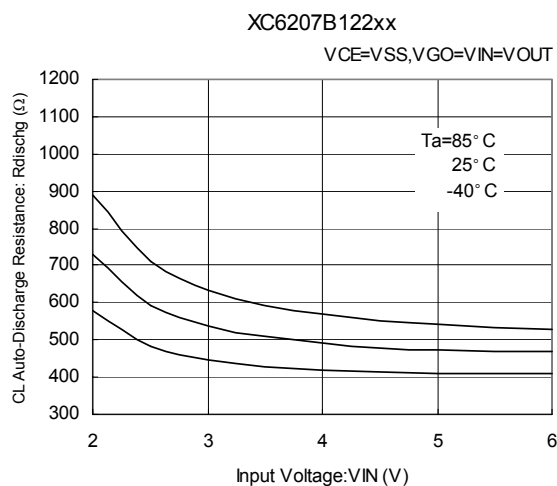







## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (8) Load Transient Response

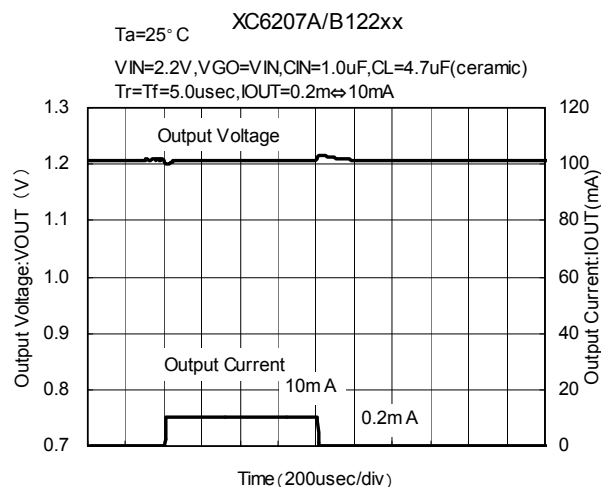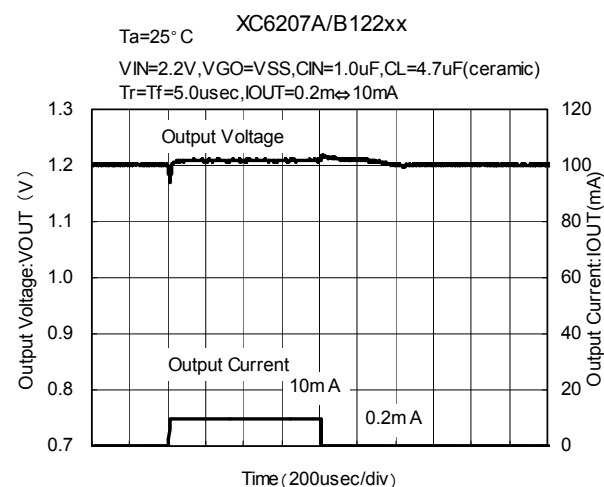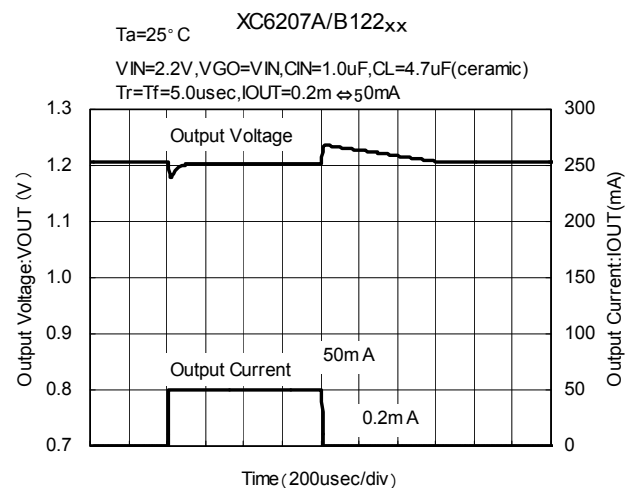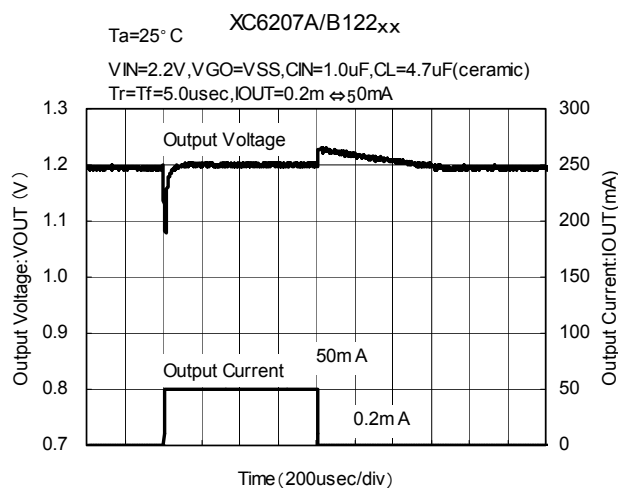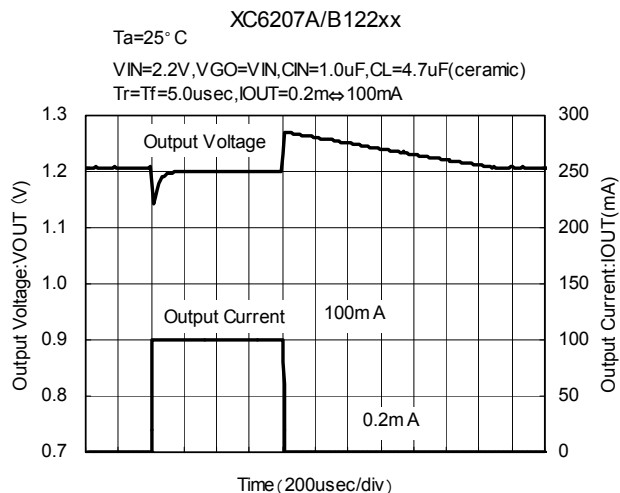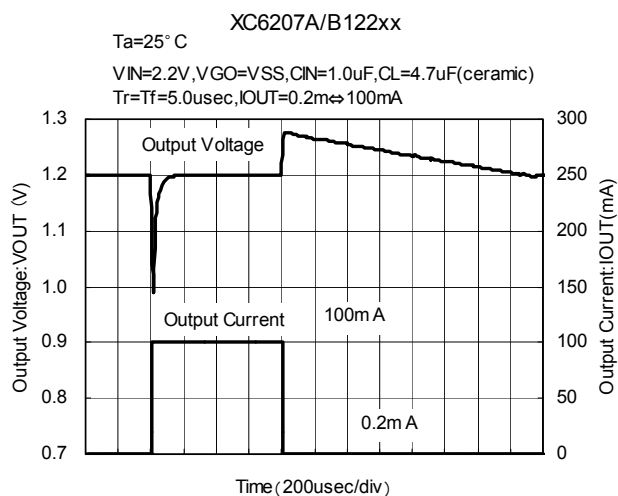







## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (8) Load Transient Response (Continued)

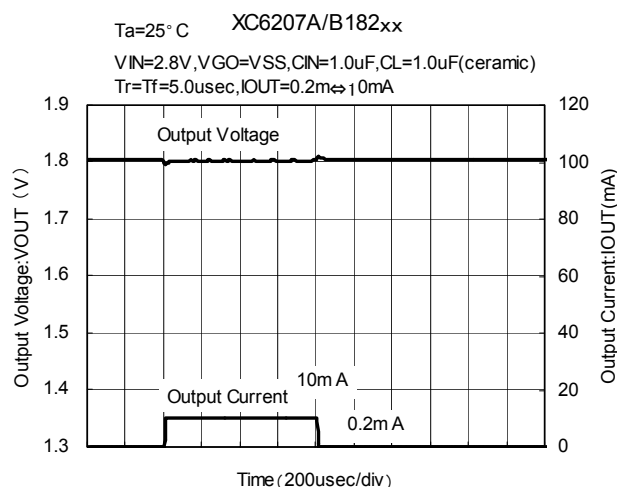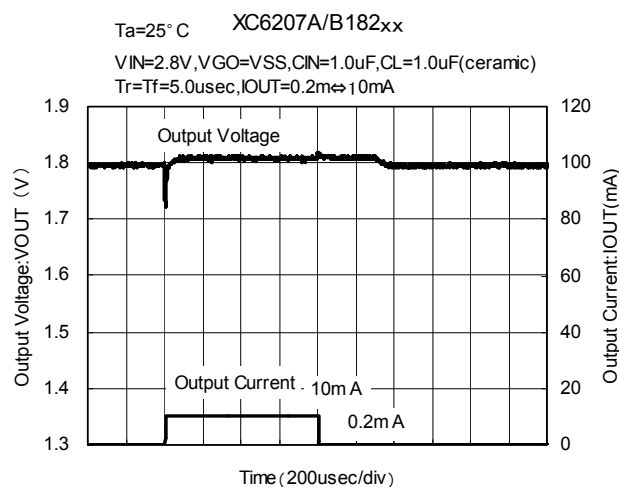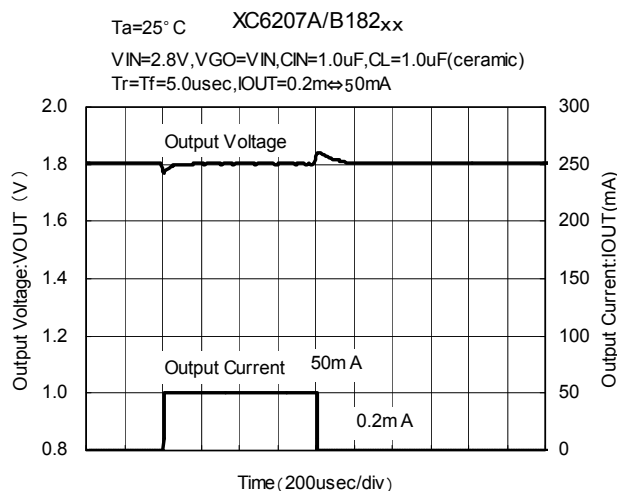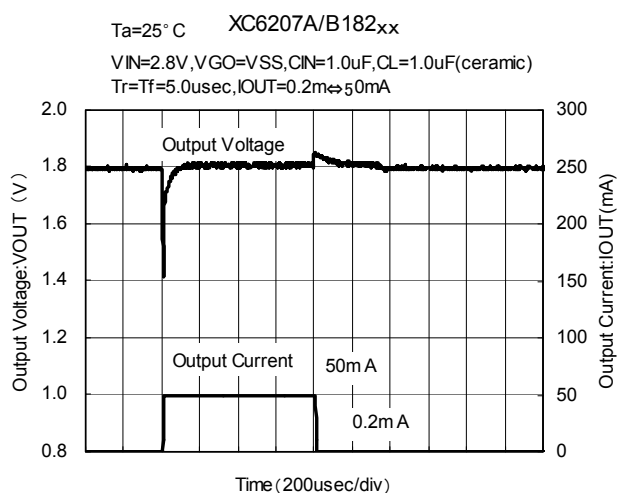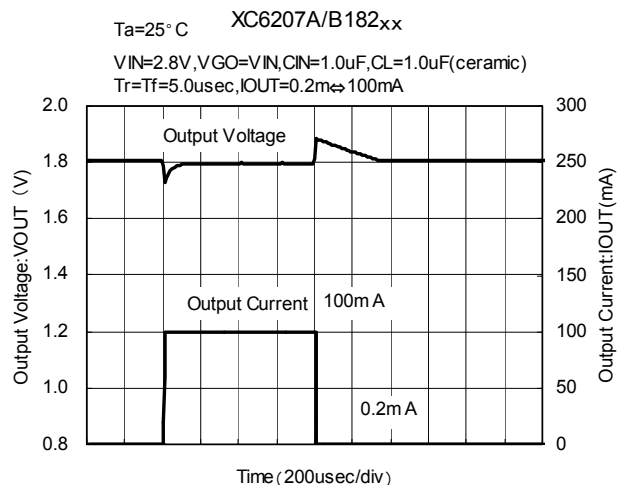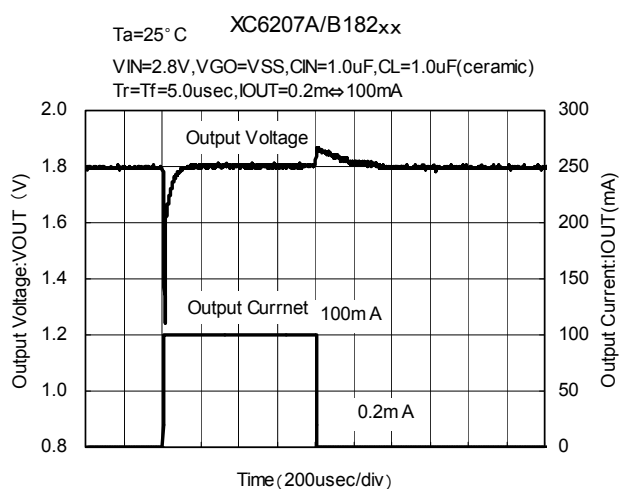







## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (8) Load Transient Response (Continued)

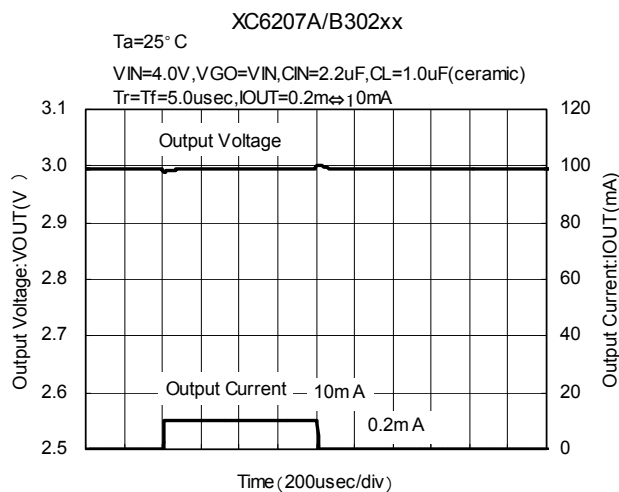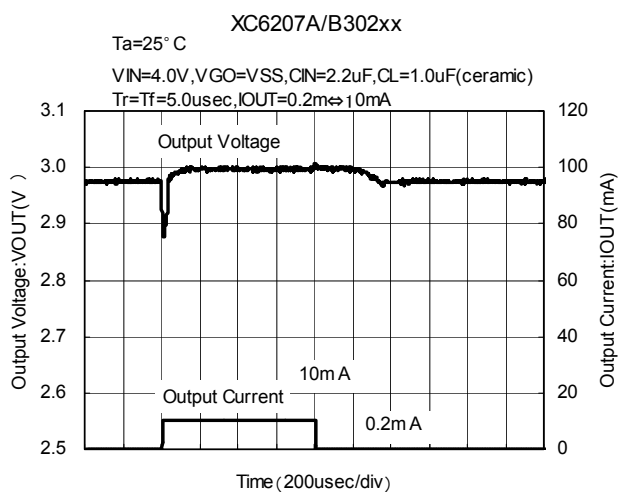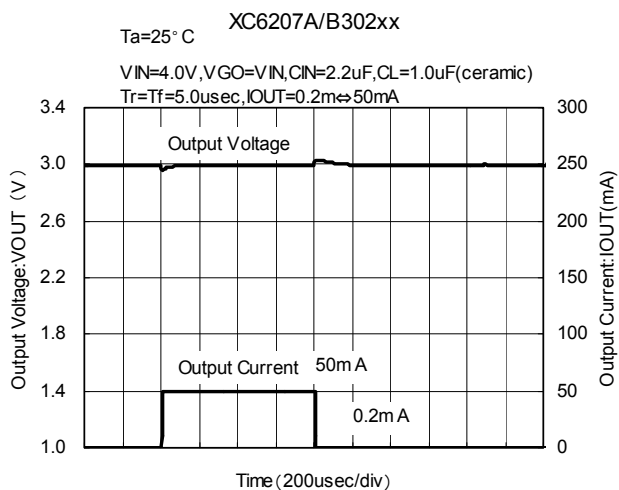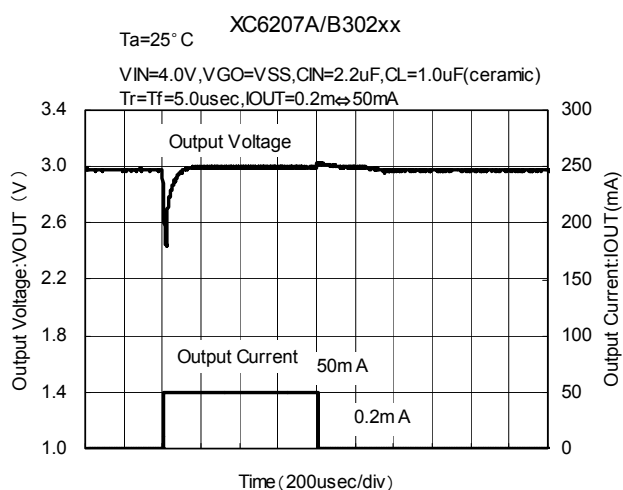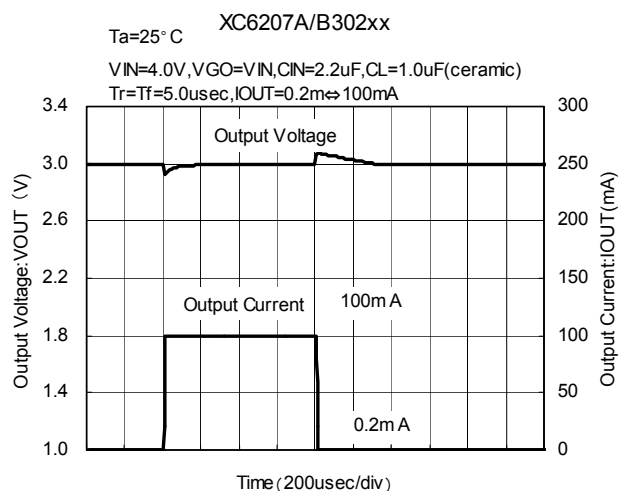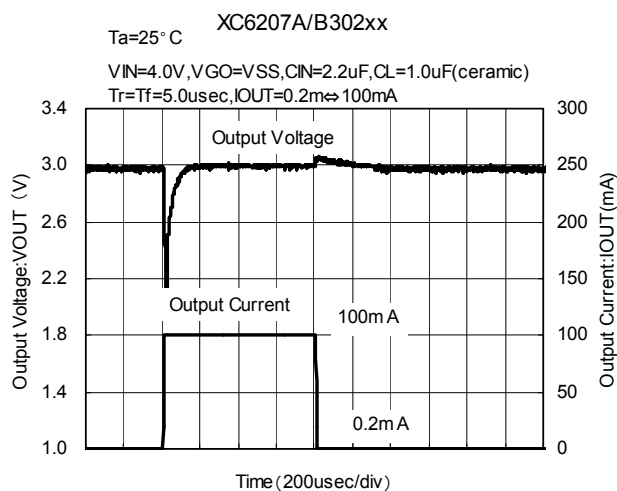







## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (8) Load Transient Response (Continued)

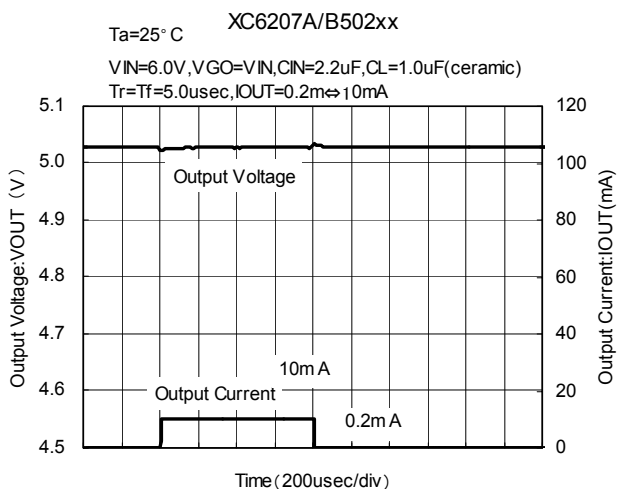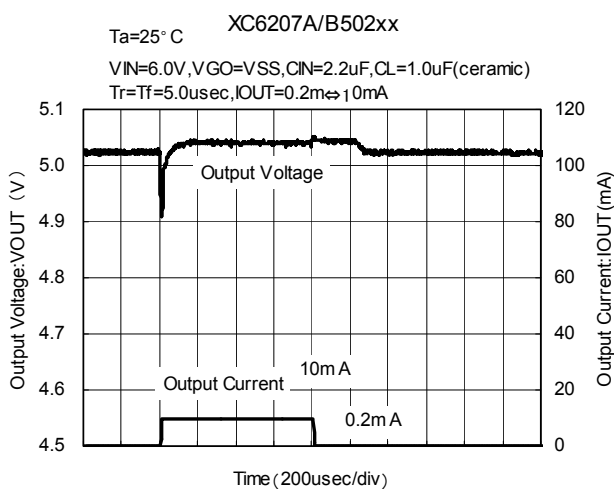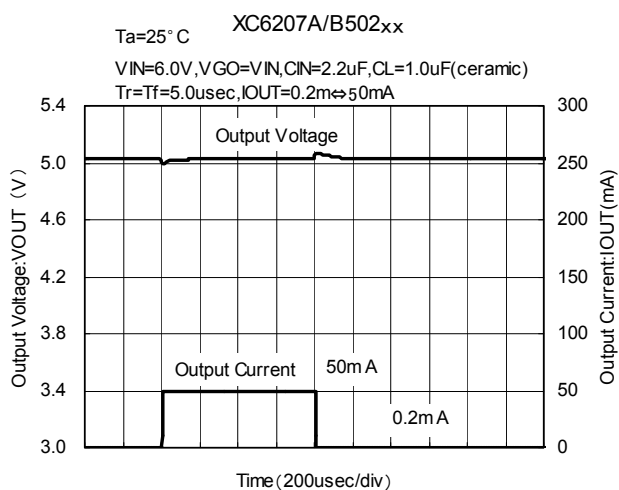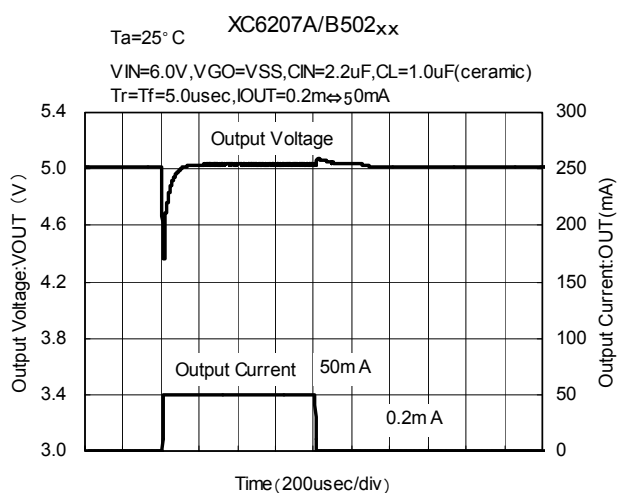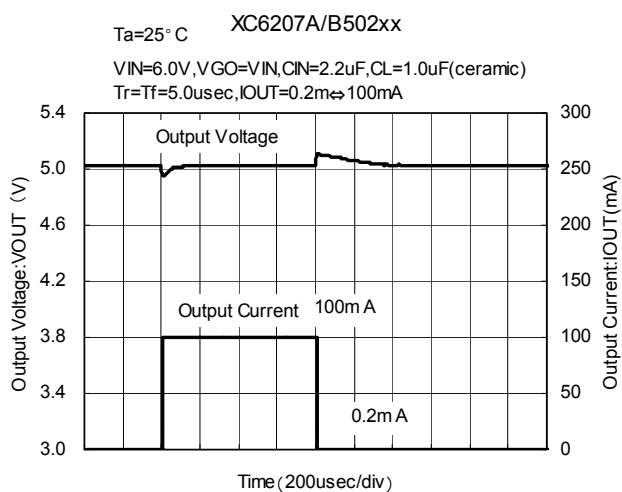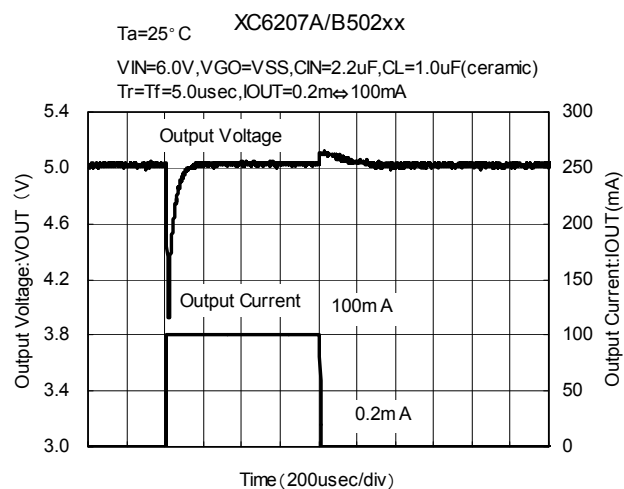







## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (8) Load Transient Response (Continued)

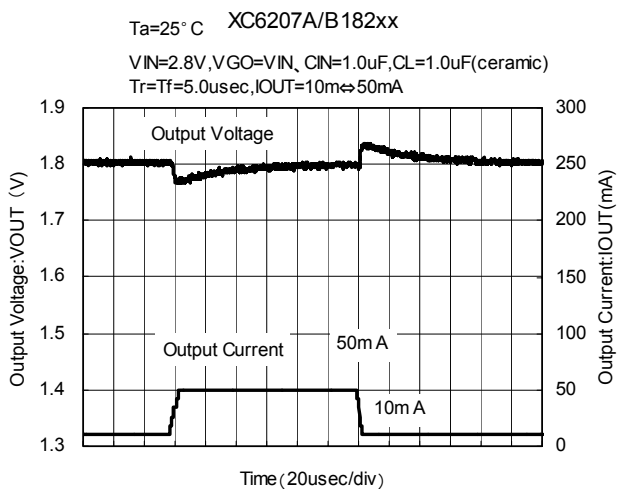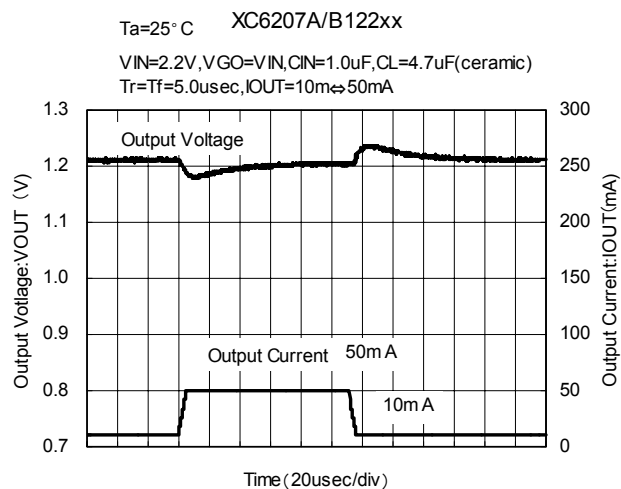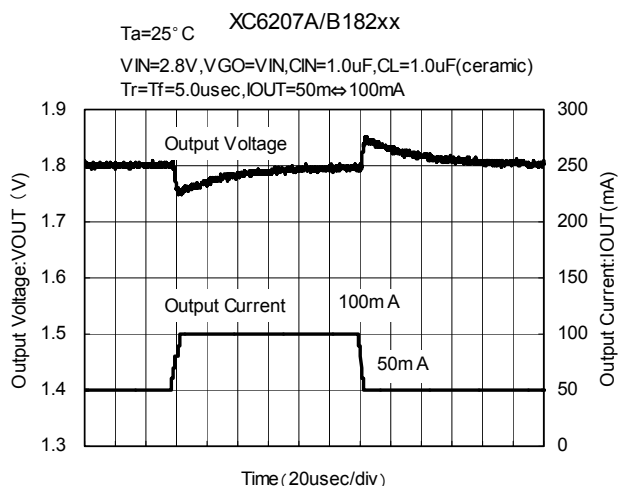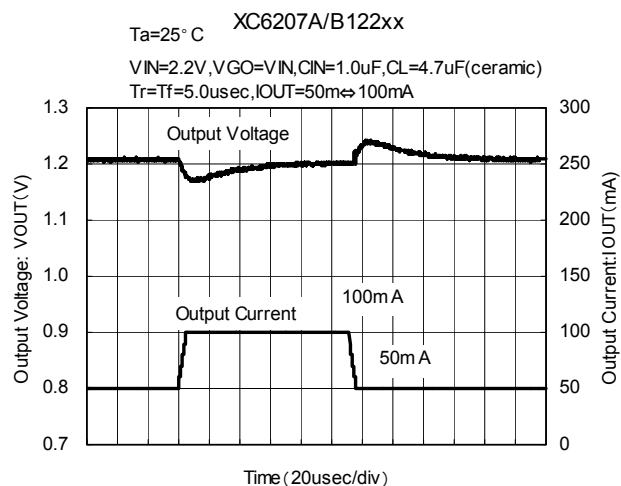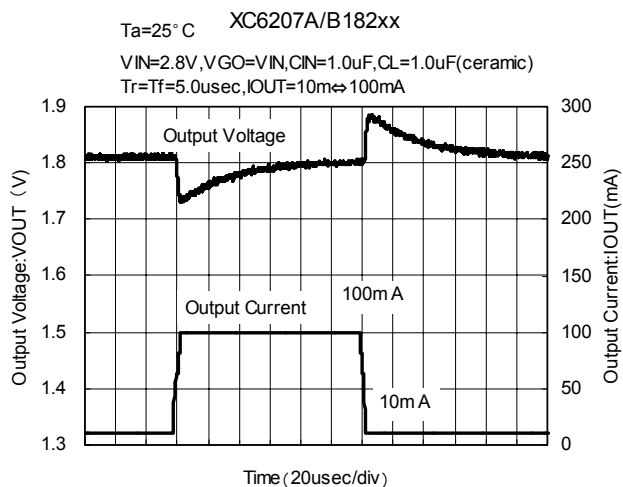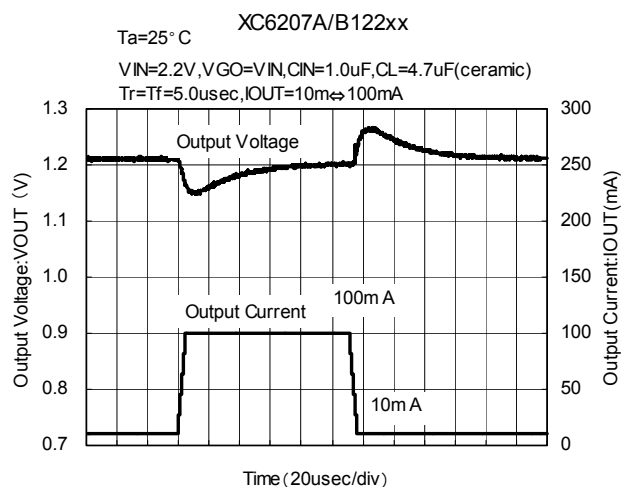







## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (8) Load Transient Response (Continued)

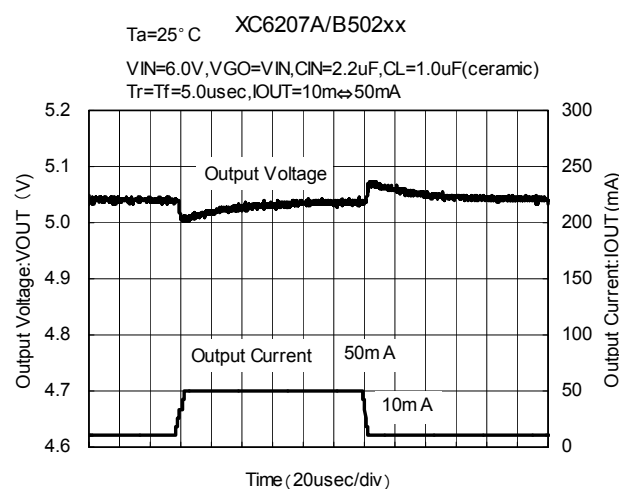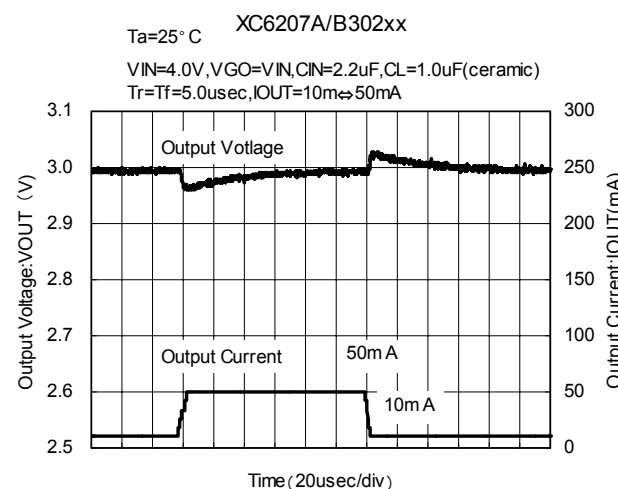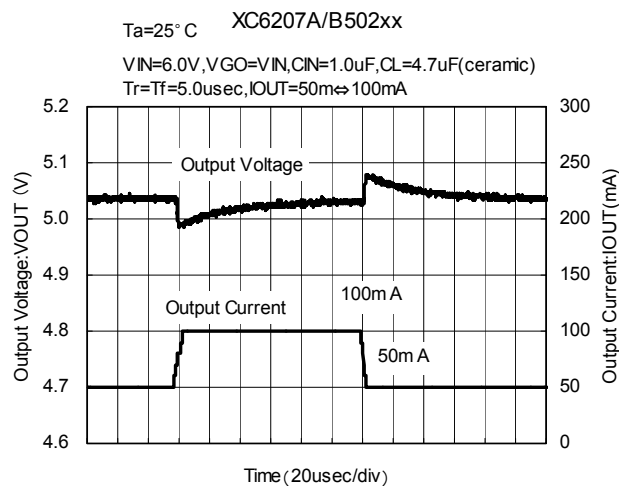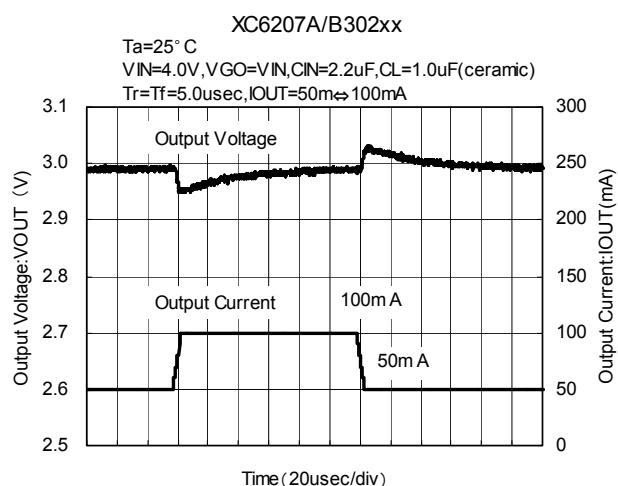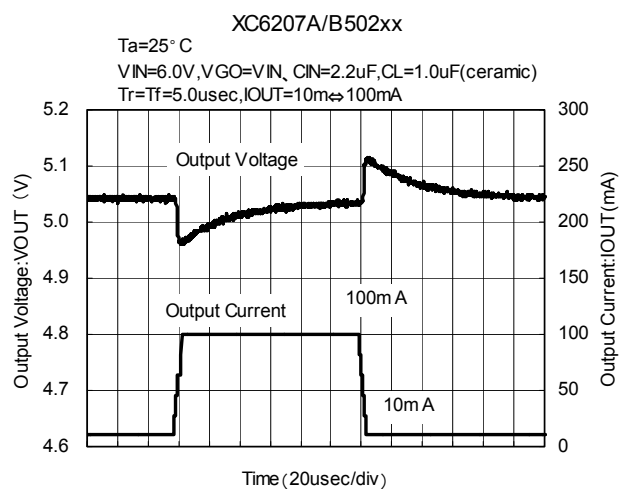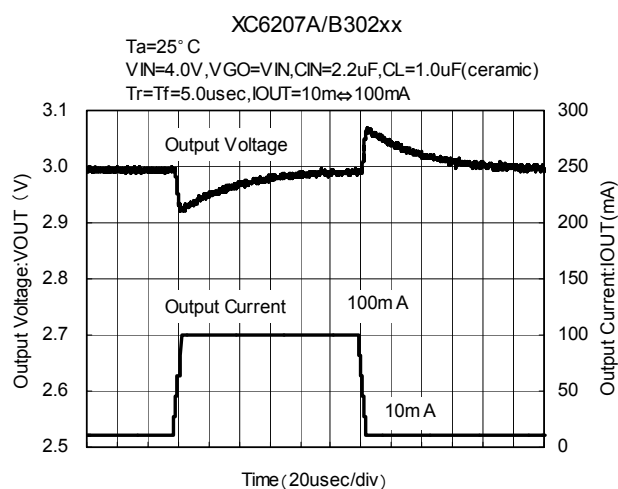







## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (9) Input Transient Response

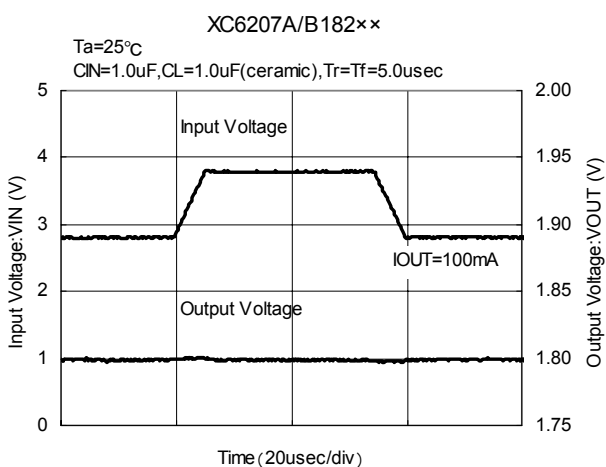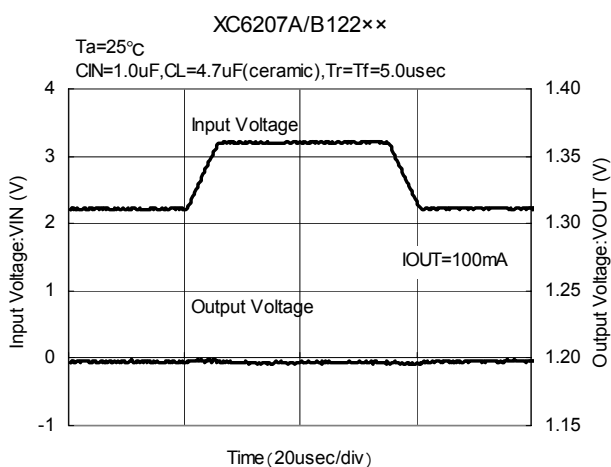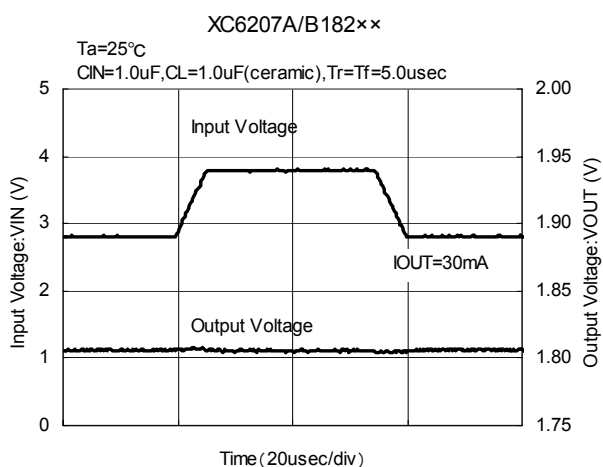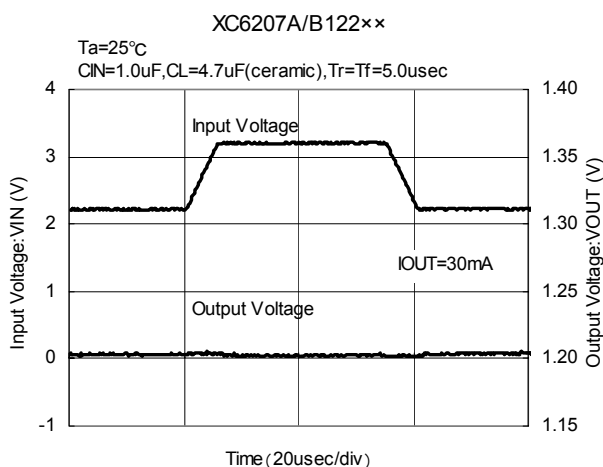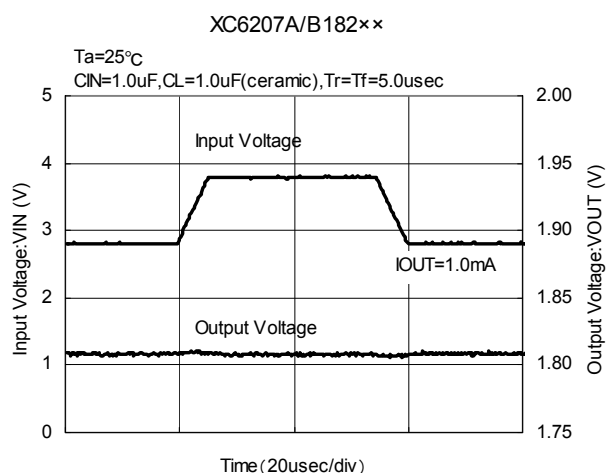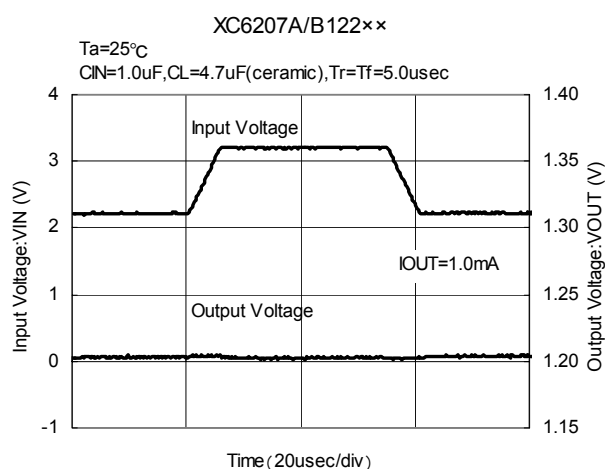







## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (9) Input Transient Response (Continued)

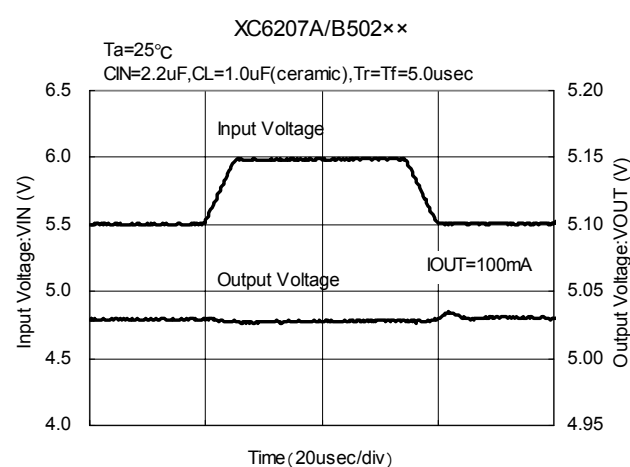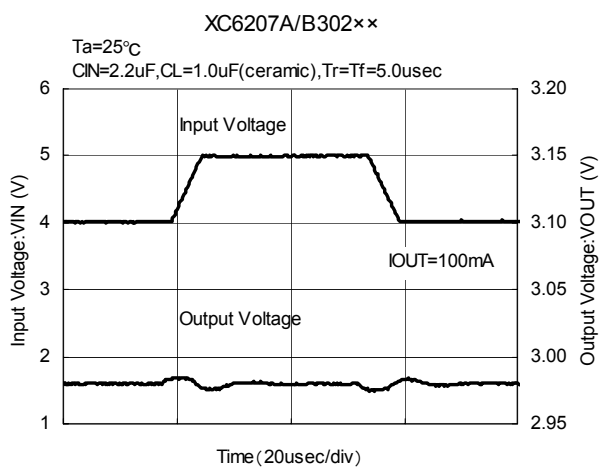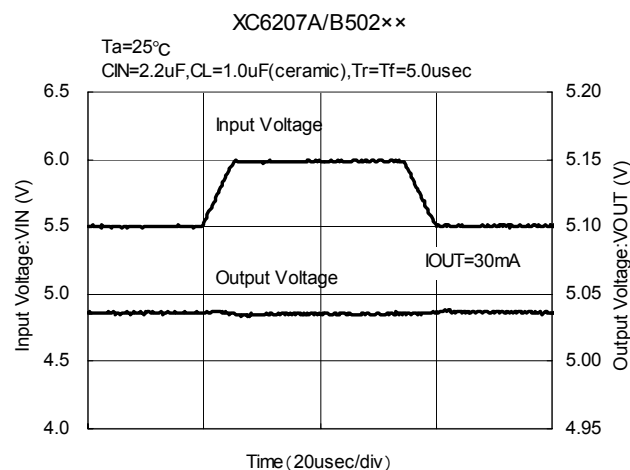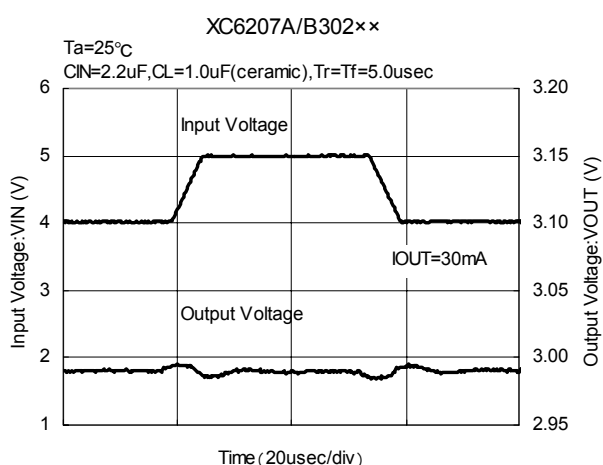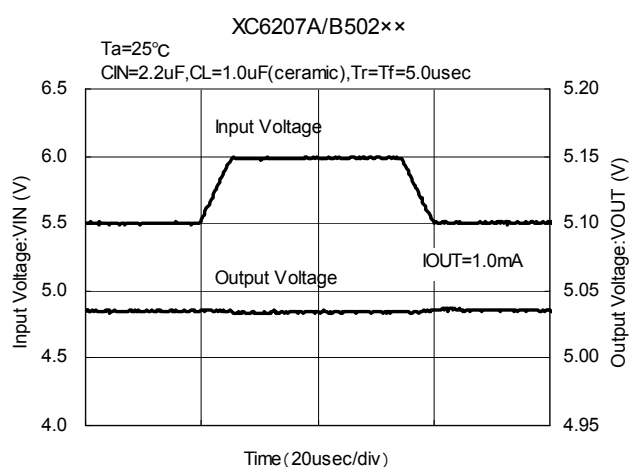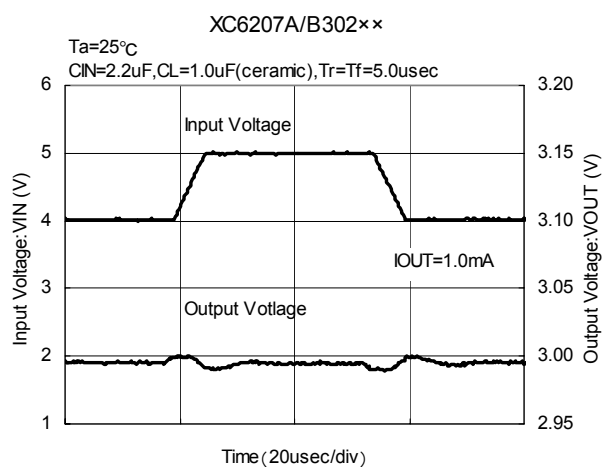







## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (10) Enable Response Time

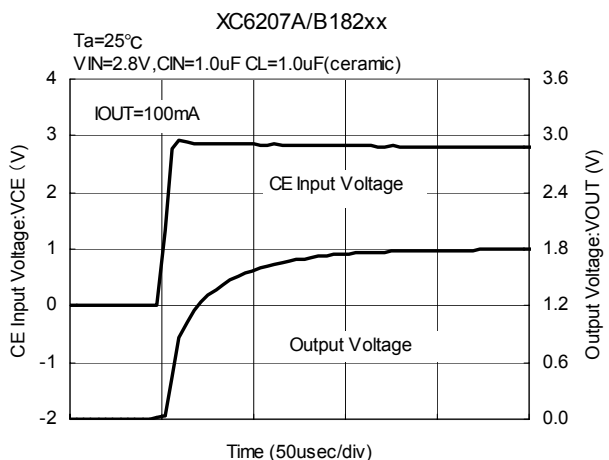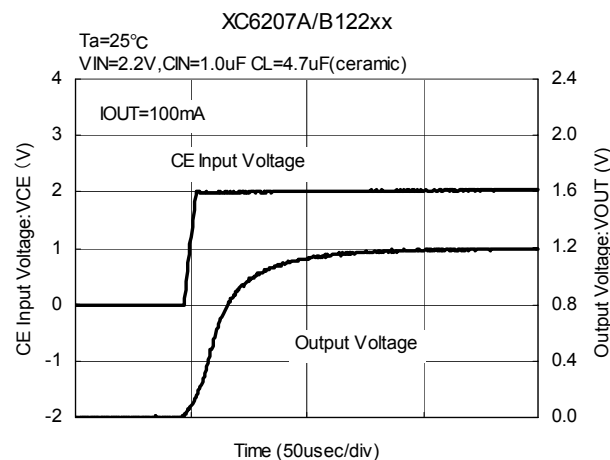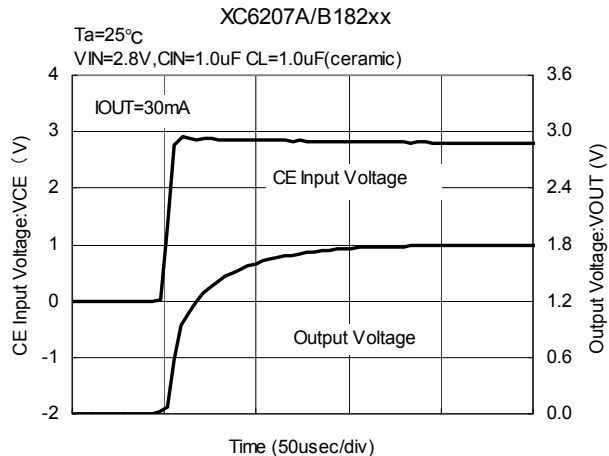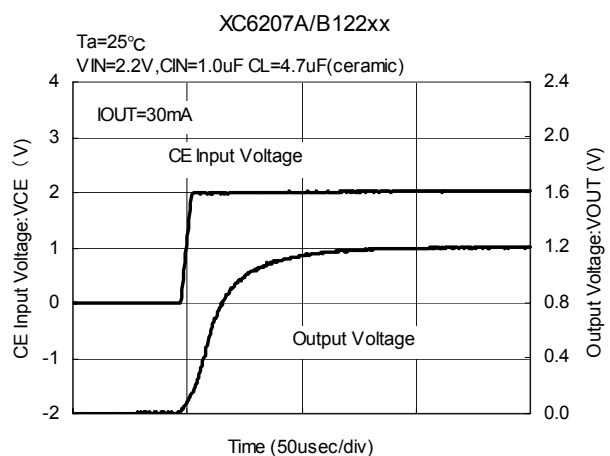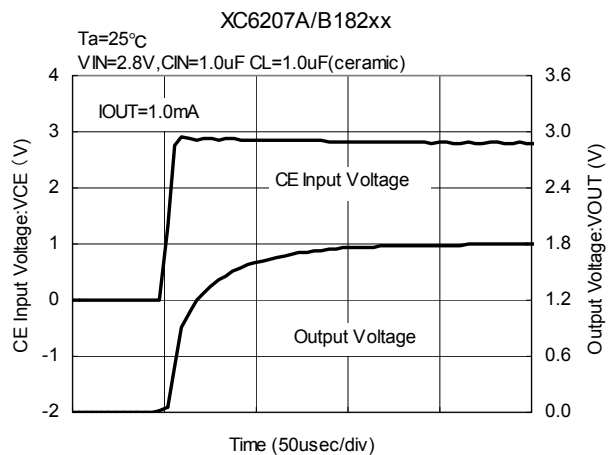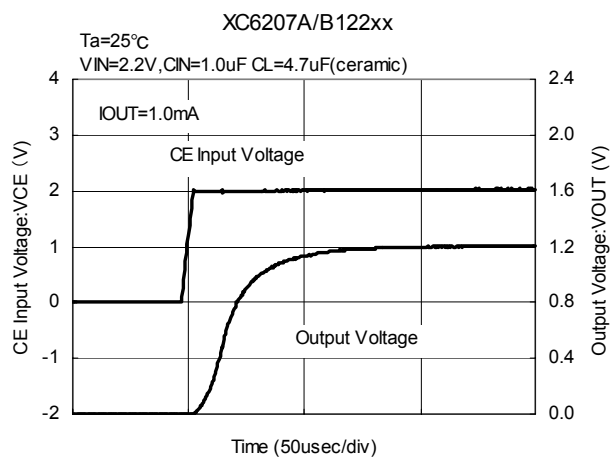

## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (10) Enable Response Time (Continued)

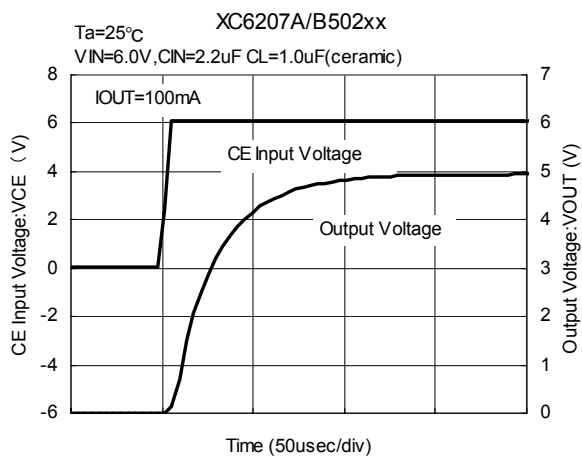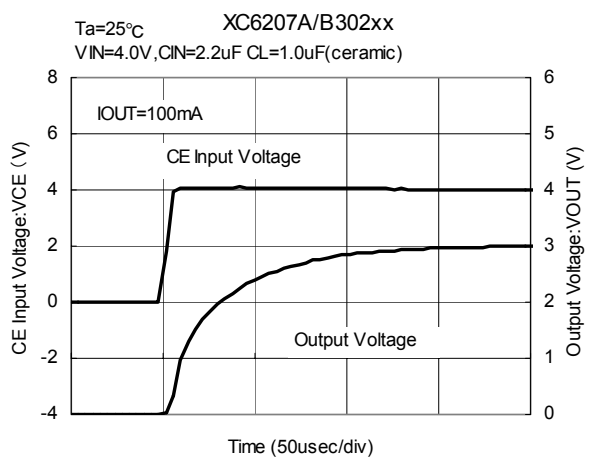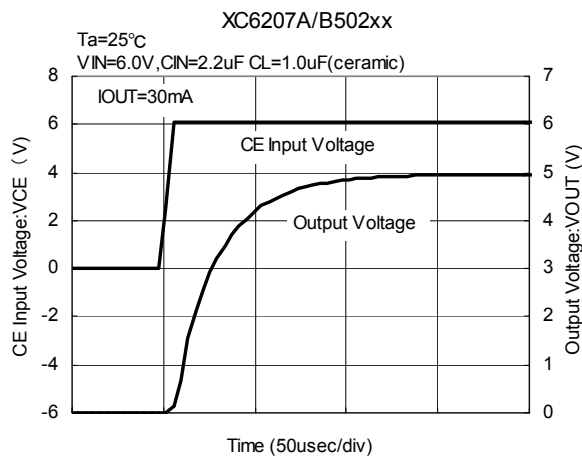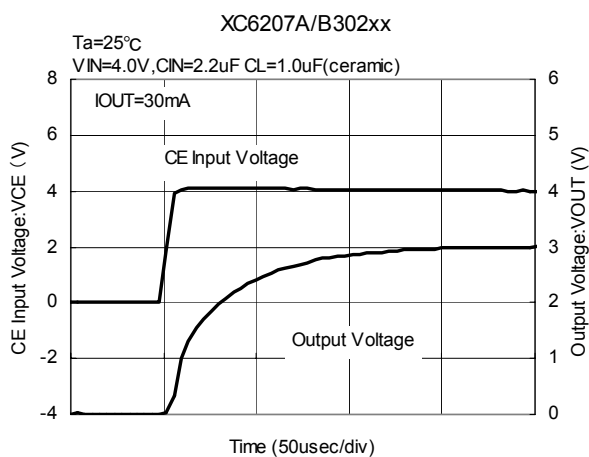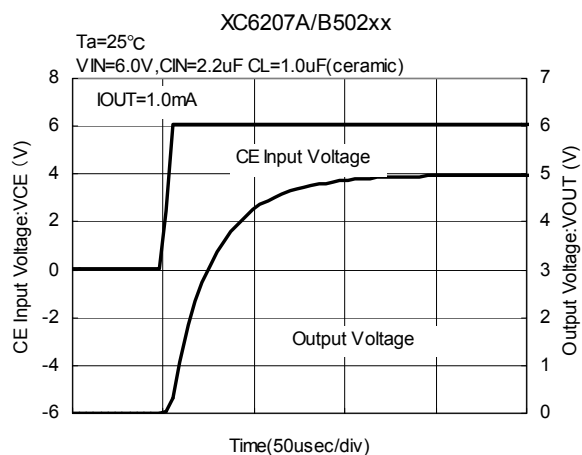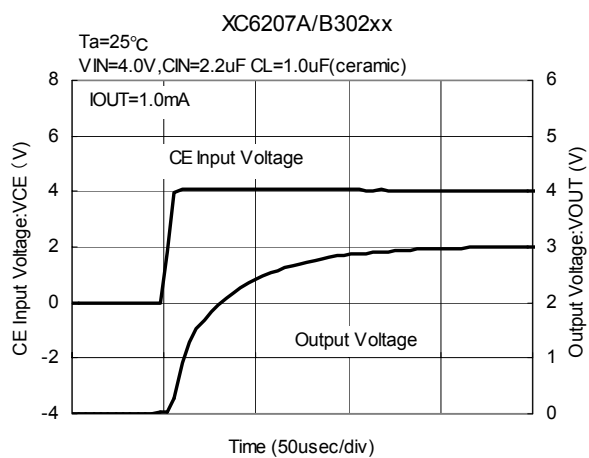

## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (11) Ripple Rejection Rate

