



Series CM D48/ CM A48

25-125Amp • 480 Vac • AC Output

- Zero Voltage and Random Turn-On Switching
- Panel Mount
- Status Indicating LED
- DC or AC Control

Featuring state-of-the-art Surface Mount Technology, these SPST-NO relays deliver proven reliability in the most demanding applications. Output consists of an SCR AC switch and is available in zero-cross or random turn-on versions.

Manufactured in Crydom's ISO 9002 Certified facility for optimum product performance and reliability.

MODEL NUMBERS	CMD4825 CMA4825	CMD4850 CMA4850	CMD4875 CMA4875	CMD4890 CMA4890	CMD48110 CMA48110	CMD48125 CMA48125
OUTPUT SPECIFICATIONS ①						
Operating Voltage (47-63 Hz) [Vrms]	48-530	48-530	48-530	48-530	48-530	48-530
Max. Load Current ③ [Arms]	25	50	75	90	110	125
Min. Load Current, [Arms]	0.15	0.15	0.25	0.25	0.25	0.25
Transient Overvoltage [Vpk]	1200	1200	1200	1200	1200	1200
Max. Surge Current, (16.6ms) [Apk]	250	625	1000	1200	1500	1750
Max. On-State Voltage Drop @Rated Current [Vpk]	1.7	1.7	1.7	1.7	1.7	1.7
Thermal Resistance Junction to Case ($R_{\theta JC}$) [°C/W]	1.02	0.63	0.31	0.28	0.25	0.22
Maximum $I^2 t$ for Fusing, (8.3 msec.) [$A^2 sec$]	260	1620	4150	6000	9340	12700
Max. Off-State Leakage Current @Rated Voltage [mArms]	10	10	10	10	10	10
Min. Off-State dv/dt @Max. Rated Voltage [V/μsec]②	500	500	500	500	500	500
Max. Turn-On Time④	1/2 Cycle (DC Control), 10.0 msec (AC Control)					
Max. Turn-Off Time	1/2 Cycle (DC Control), 40.0 msec (AC Control)					
Power Factor (Min.) with Max. Load	0.5	0.5	0.5	0.5	0.5	0.5

INPUT SPECIFICATIONS①	DC CONTROL	AC CONTROL
Control Voltage Range	4-32 Vdc	90-140 Vrms
Max. Reverse Voltage	32 Vdc	—
Max. Turn-On Voltage	4.0 Vdc	90 Vrms
Min. Turn-Off Voltage	1.0 Vdc	10 Vrms
Max. Input Current	30.0mA⑤	—
Typical Input Current	14mA @5 Vdc 15mA @120 Vrms	

GENERAL SPECIFICATIONS	
Dielectric Strength 50/60Hz Input/Output/Base	4000 Vrms
Insulation Resistance (Min.) @500 Vdc	10 ⁹ Ohm
Max. Capacitance Input/Output	8 pF
Ambient Operating Temperature Range	-40 to 80°C
Ambient Storage Temperature Range	-40 to 125°C
Status Indicating Display	Green LED

GENERAL NOTES

- ① All parameters at 25°C unless otherwise specified.
 ② Off-State dv/dt test method per EIA/NARM standard RS-443, paragraph 13.11.1
 ③ HEAT SINKING REQUIRED, for derating curves see page 2.
 ④ Turn-on time for DC control random turn-on versions is 0.02msec.
 ⑤ Input circuitry incorporates active current limiter.

MECHANICAL SPECIFICATIONS

Weight: (typical)	3.0 oz. (86.5g)
Encapsulation:	Thermally Conductive Epoxy
Terminals:	Cage Type
Maximum Wire Size- Output: AWG6 (4.1mm) Input: AWG10 (2.6mm)	

©1998 CRYDOM CORP. Specifications subject to change without notice.

For recommended applications and more information contact:


USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280
 Crydom Corp, 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com
WEB SITE: http://www.crydom.com **FASTFAX Product Information:** (888) 267-9191
UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Concor Close,
 Woolbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SU
GERMANY: (49) (0)6874 182580 • fax (49)(0)6874 182585 Crydom GmbH,
 Gewerbegebiet Im Schachen, D-66687 Nunkirchen, Germany • e-mail: vertrieb@crydom.com





Series CM D48/ CM A48

25-125Amp • 480 Vac • AC Output

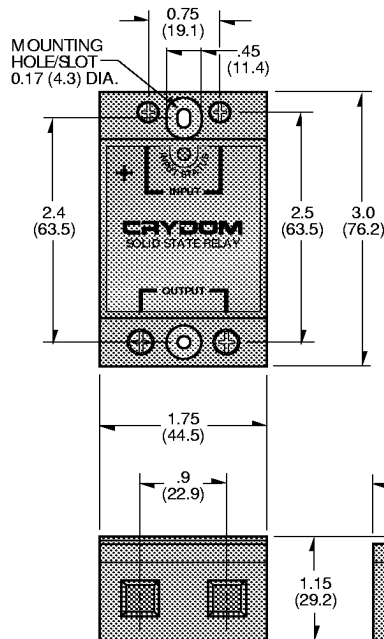

MECHANICAL SPECIFICATIONS


All dimensions are in inches (millimeters)

CM RD48/CM RA48 available with factory mounted heat sink and DIN rail mounting clip. Specifications available via FastFax, request document No. 171.

AVAILABLE OPTIONS

- 10** Random Turn-On, Phase Controllable
Example: **CM D4850-10**
- E** 24 Vac Input (18-36 Vac)
Example: **CM A4850E**

CURRENT DERATING CURVES

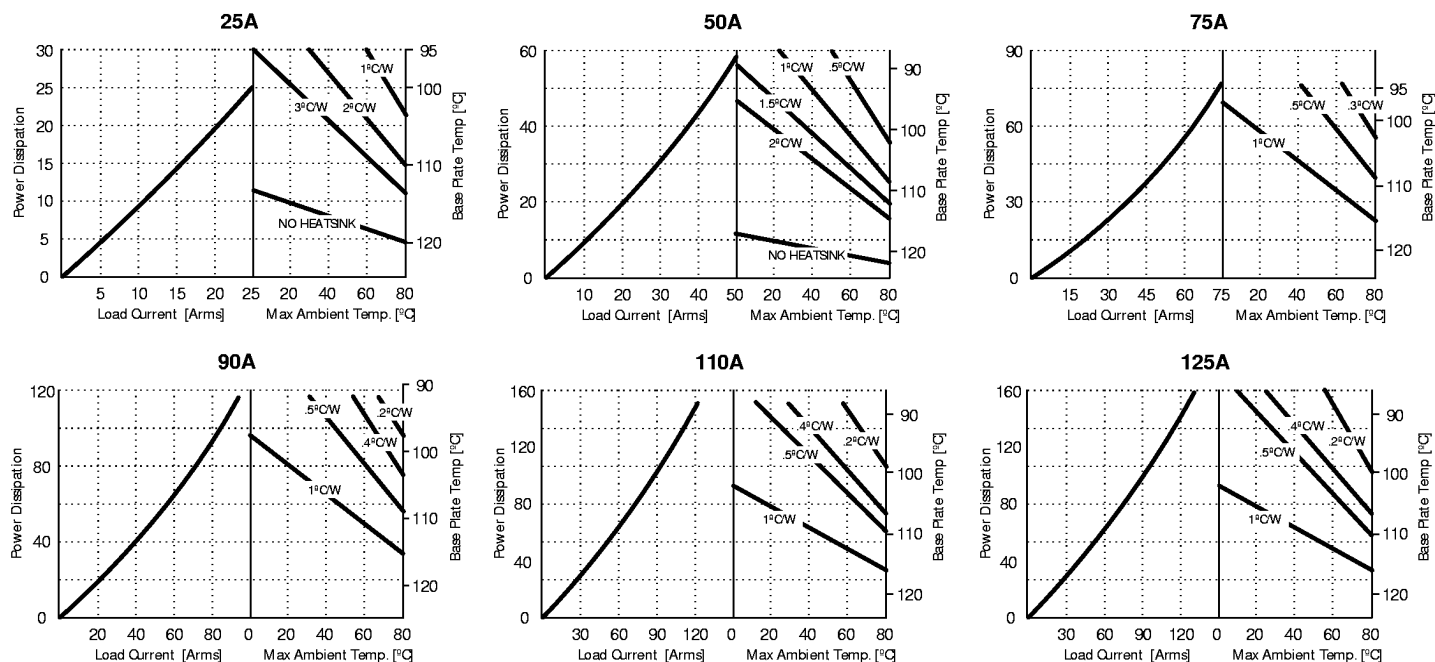

©1998 CRYDOM CORP, Specifications subject to change without notice.

APPROVALS

UL PENDING
CSA PENDING
VDE PENDING



FastFax Document No. 170
CMD/CMA.060398, PAGE 4 OF 6

For recommended applications and more information contact:

USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280
Crydom Corp, 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com
WEB SITE: <http://www.crydom.com> **FASTFAX Product Information:** (888) 267-9191
UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Condon Close,
Woolbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SU
GERMANY: (49) (0)6874 182580 • fax (49) (0)6874 182585 Crydom GmbH,
Gewerbegebiet Im Schachen, D-66687 Nunkirchen, Germany • e-mail: vertrieb@crydom.com

