

GENERAL DESCRIPTION

The CM8300 is the Multiple-LED Current Balancer. It can be used for LED application. By implementing the Daisy Configuration, users can design a single network that can drive many parallel LEDs, resulting in dramatic total system cost reduction.

The CM8300 gets its power through the LED and therefore does NOT require an additional power supply. The maximum DC voltage is 5 VDC. Each pin can handle up to 10mA.

The CM8300 family comes with the industry standard PSOP-8, PTSSOP package.

FEATURES


- ◆ Ideal for 2 to unlimited-LED design
- ◆ Current Sense for photo-couple
- ◆ Self powered without additional power supply
- ◆ 8-Pin PSOP and PTSSOP Package
- ◆ Absolute Maximum Voltage is 5VDC
- ◆ +/- 1% Current Tracking Accuracy

APPLICATIONS

- ◆ Multiple LED in LCD Backlight

PIN CONFIGURATION

PSOP-8 (PS08)/PTSSOP-8 (PT08)
Top View

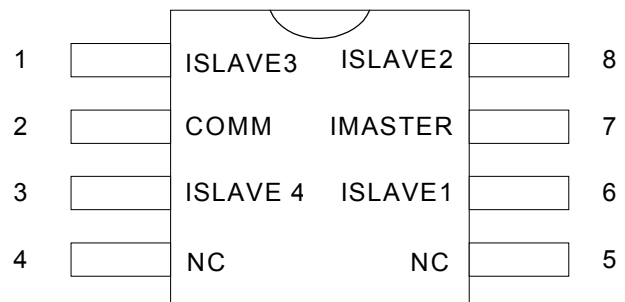


PIN DESCRIPTION

Pin No.	Symbol	Description	Operating Rating			
			Min.	Typ.	Max.	Unit
1	ISLAVE3	Current output pin. Connect to one of the slave lamp and the current will follow the IMASTER		30	50	mA
2	COMM	Common pin for lamp network		30	50	mA
3	ISLAVE4	Current output pin. Connect to one of the slave lamp and the current will follow the IMASTER		30	50	mA
4	NC					
5	NC					
6	ISLAVE1	Current output pin. Connect to one of the slave lamp and the current will follow the IMASTER		30	50	mA
7	IMASTER	Current output pin. Connect to master lamp. Connect a serial resistor to ensure the lamp is master		30	50	mA
8	ISLAVE2	Current output pin. Connect to one of the slave lamp and the current will follow the IMASTER		30	50	mA

ORDERING INFORMATION

Part Number	Temperature Range	Package
CM8300IS	-40°C~+85°C	PSOP-8 (PS08)
CM8300IT	-40°C~+85°C	PTSSOP-8 (PT08)

BLOCK DIAGRAM

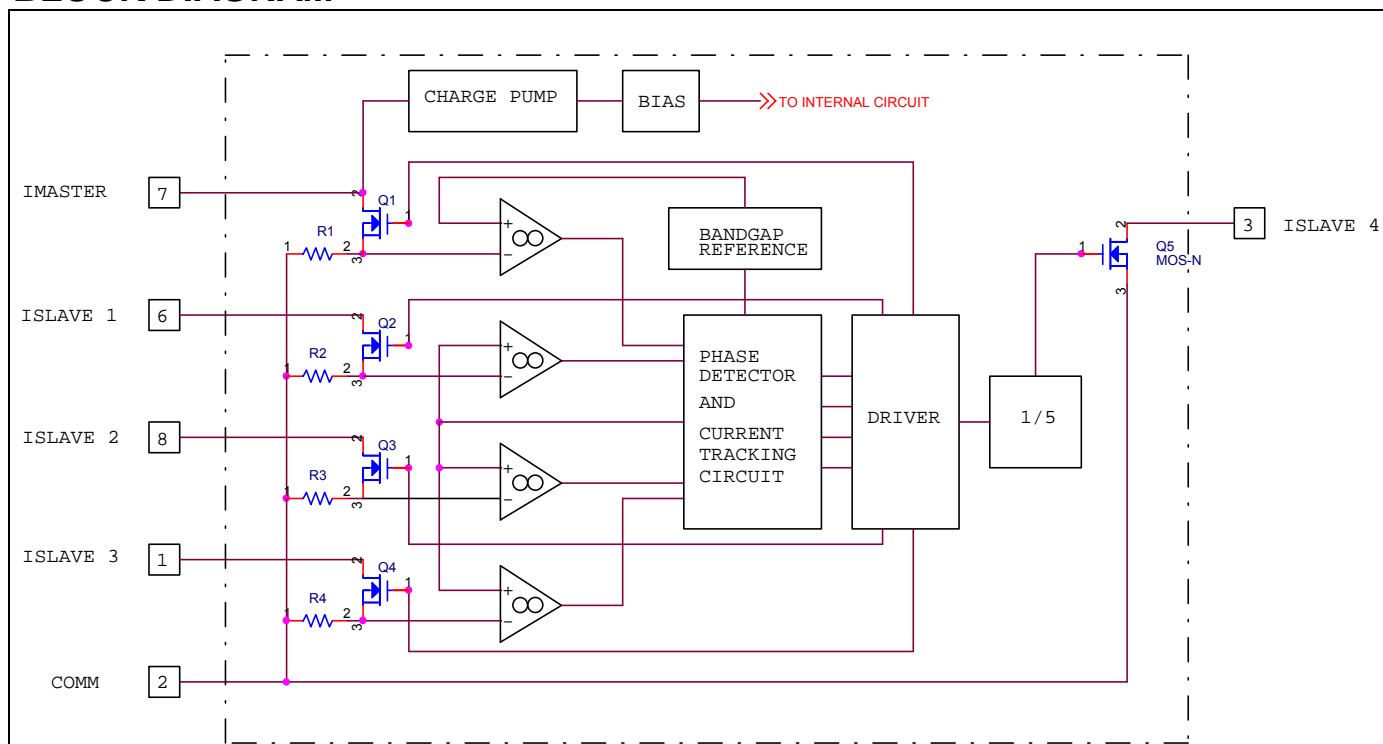

ABSOLUTE MAXIMUM RATINGS

Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied

Current on IMASTER, ISLAVE1, ISLAVE2, ISLAVE3	50mA	Junction Temperature	+150°C
Voltage on IMASTER, ISLAVE1, ISLAVE2, ISLAVE3	5V	Storage Temperature	-65 °C to +150°C
Current on ISENSE	30mA	Lead Temperature (Soldering 10 Sec.)	+260°C
		Thermal Resistance (θ_{JA})	+150°C/W

OPERATING CONDITIONS


Temperature Range -40°C to +85°C

ELECTRICAL CHARACTERISTICS (Unless otherwise stated, these specifications apply $T_A=25^\circ\text{C}$)

maximum ratings are stress ratings only and functional device operation is not implied.


Symbol	Parameter	Test Conditions	CM8300			Unit
			Min.	Typ.	Max.	
Current Tracking Test, ISLAVE1, ISLAVE2, ISLAVE3 = 5V and IMASTER=1mA						
	ISLAVE1		29.98	30	30.02	mA
	ISLAVE2		29.98	30	30.02	mA
	ISLAVE3		29.98	30	30.02	mA
	ISLAVE4		29.98	30	30.02	mA

TYPICAL APPLICATION SCHEMATIC FOR ORGANIC-LED CURRENT CONTROL

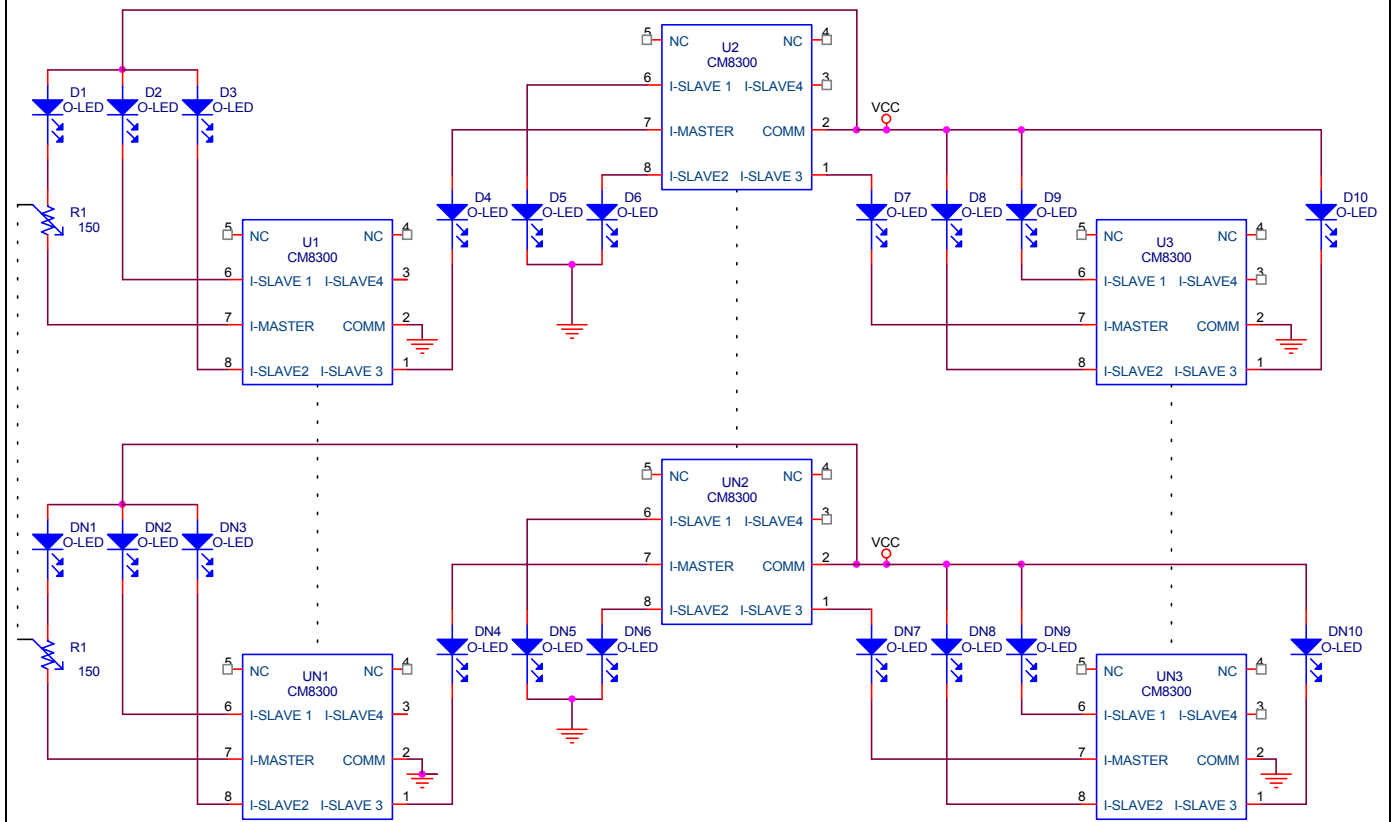



PACKAGE DIMENSION

8-PIN PSOP (PS08)

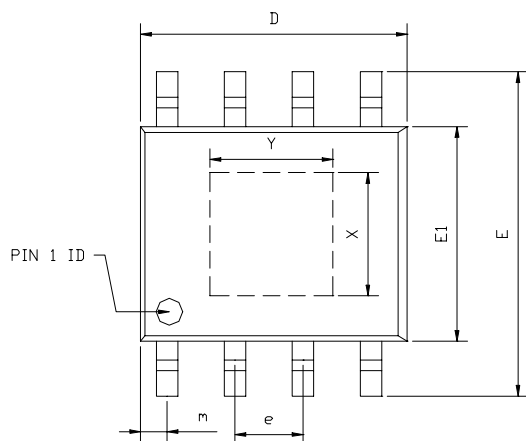


SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A1	0.10	---	0.25	0.004	---	0.010
A2	1.40	---	1.55	0.055	---	0.061
b	0.30	---	0.51	0.012	---	0.020
C	0.15	---	0.26	0.006	---	0.010
D	4.60	---	5.06	0.169	---	0.199
E	5.79	---	6.20	0.228	---	0.244
E1	3.76	---	4.01	0.148	---	0.158
e	---	1.27	---	---	0.050	---
L	0.38	---	0.69	0.015	---	0.035
m	0.43	---	0.69	0.017	---	0.027
θ	0°	---	8°	0°	---	8°

EXPOSED PAD DIMENSION : (mm)
PAD SIZE: X=2.3 ; Y=2.3

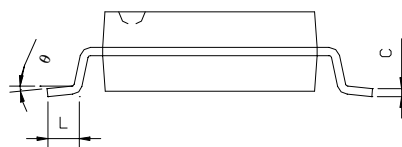
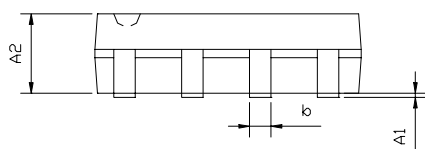


8-PIN PTSSOP (PT08)

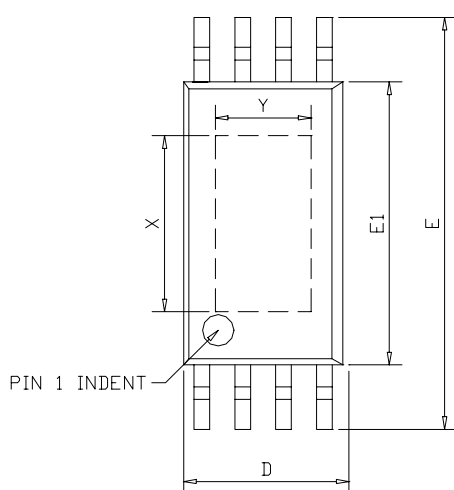

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A1	0.05	---	0.15	0.002	---	0.006
A2	---	1.00	1.05	---	0.039	0.041
b	0.25	---	0.30	0.010	---	0.012
C	---	0.127	---	---	0.005	---
D	2.90	3.05	3.10	0.114	0.120	0.122
E	6.20	6.40	6.60	0.244	0.252	0.260
E1	4.30	---	4.50	0.169	---	0.177
e	---	0.65	---	---	0.026	---
L	0.50	---	0.70	0.020	---	0.028
θ	0°	---	8°	0°	---	8°

EXPOSED PAD DIMENSION : (mm)
PAD SIZE: X=2.8; Y=1.524

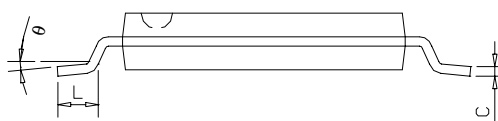

IMPORTANT NOTICE

Champion Microelectronic Corporation (CMC) reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. CMC integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of CMC products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

HsinChu Headquarter

5F, No. 11, Park Avenue II,
Science-Based Industrial Park,
HsinChu City, Taiwan

TEL: +886-3-567 9979

FAX: +886-3-567 9909

<http://www.champion-micro.com>

Sales & Marketing

11F, No. 306-3, Sec. 1, Ta Tung Rd.,
Hsichih, Taipei Hsien 221
Taiwan, R.O.C.

TEL: +886-2-8692 1591

FAX: +886-2-8692 1596