



## Dual Graphics Clock Generator

### Features

- Generates 16 preset video clocks, 8 preset memory clocks, and buffers the reference frequency output
- Built-in power supply conditioning circuitry provides excellent jitter performance and eliminates the need for an external VDD dropping resistor
- Requires only two external components: one 14.318 MHz crystal and one 0.1  $\mu$ F decoupling capacitor
- Supports VGA, Super-VGA, XGA™, and 8514 graphic standards
- Supports output frequencies up to 135 MHz
- Drop-in replacement for ICS2494 and AV9194
- CMOS technology in 20-pin PDIP and SOIC
- 5V or 3.3V supply. For specific details on the 3.3V version, please consult Chrontel.

### Description

CH9294 is a dual PLL clock generator designed for high frequency graphics applications. It can also be used in applications requiring multiple clocks, such as PC motherboards, disk drives, CD-ROM systems, and modems.

The CH9294 provides separate memory clock (MCLK) and video clock (VCLK) outputs, and a 14.318 MHz reference clock output. Other input frequencies can be used to obtain different output frequencies. Internal loop filter elements minimize external part count.

The STROBE pin should be tied high or left open if not used. FSx pins are latched on the falling edge of STROBE.

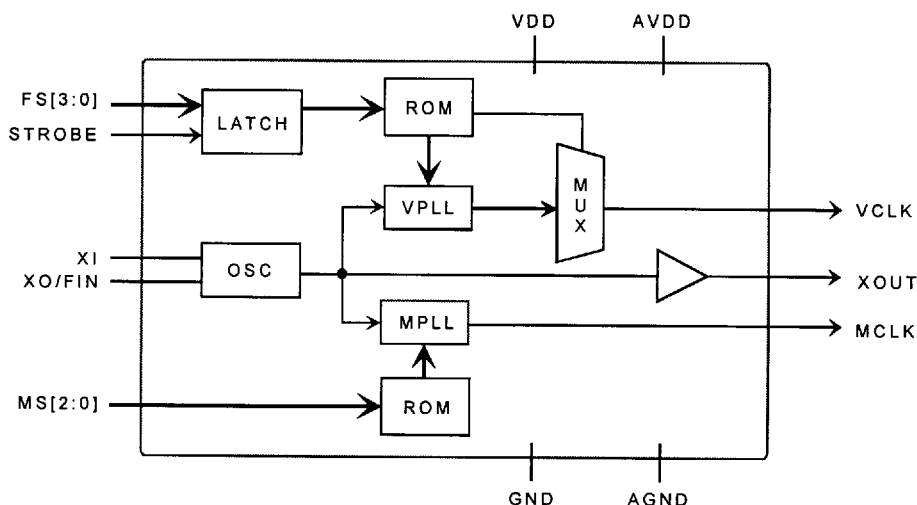


Figure 1: Block Diagram




Figure 2: CH9294E and G

Table 1 • Pin Description CH9294E and G

| Pin        | Type     | Symbol             | Description                                                                                        |
|------------|----------|--------------------|----------------------------------------------------------------------------------------------------|
| 1          | Out / In | XO / FIN           | Crystal output or external FREF input                                                              |
| 2          | In       | XI                 | Crystal input                                                                                      |
| 3          | In       | MS2                | Memory clock select 2 (MS2 is internal pull-down for Version E and internal pull-up for Version G) |
| 4, 5, 7, 8 | In       | FS0, FS1, FS2, FS3 | Video frequency clock select (internal pull-up)                                                    |
| 6          | In       | STROBE             | FS0 through FS3 strobe input (internal pull-up)                                                    |
| 9, 11      | In       | MS0, MS1           | Memory clock select (internal pull-up)                                                             |
| 10, 14, 17 | Power    | GND                | Ground                                                                                             |
| 12         | Out      | MCLK               | Memory clock output                                                                                |
| 13, 20     | Power    | VDD                | 5V supply                                                                                          |
| 15         | Power    | AVDD               | Analog 5V supply                                                                                   |
| 16         | Power    | AGND               | Analog ground                                                                                      |
| 18         | Out      | XOUT               | Buffered reference (14.318 MHz) frequency output                                                   |
| 19         | Out      | VCLK               | Video clock output                                                                                 |

Table 2 • Frequencies for CH9294E and G (in MHz)

## Video Clock

| Frequency Select (FS) |     |     |     | VCLK           |                |
|-----------------------|-----|-----|-----|----------------|----------------|
| FS3                   | FS2 | FS1 | FS0 | Version E      | Version G      |
| 0                     | 0   | 0   | 0   | 50.35          | 25.18          |
| 0                     | 0   | 0   | 1   | 56.65          | 28.32          |
| 0                     | 0   | 1   | 0   | 65.0           | 40.0           |
| 0                     | 0   | 1   | 1   | 72.0           | 72.0           |
| 0                     | 1   | 0   | 0   | 80.0           | 50.0           |
| 0                     | 1   | 0   | 1   | 89.8           | 77.0           |
| 0                     | 1   | 1   | 0   | 63.0           | 36.0           |
| 0                     | 1   | 1   | 1   | 75.0           | 44.9           |
| 1                     | 0   | 0   | 0   | 25.18          | 130.0          |
| 1                     | 0   | 0   | 1   | 28.32          | 120.0          |
| 1                     | 0   | 1   | 0   | 31.5           | 80.0           |
| 1                     | 0   | 1   | 1   | 36.0           | 31.5           |
| 1                     | 1   | 0   | 0   | 40.0           | 110.0          |
| 1                     | 1   | 0   | 1   | 44.9           | 65.0           |
| 1                     | 1   | 1   | 0   | 50.0           | 75.0           |
| 1                     | 1   | 1   | 1   | 65.0 (default) | 94.5 (default) |

## Memory Clock

| Memory Select (MS) |     |     | MCLK           |                |
|--------------------|-----|-----|----------------|----------------|
| MS2                | MS1 | MS0 | Version E      | Version G      |
| 0                  | 0   | 0   | 40.0           | 55.0           |
| 0                  | 0   | 1   | 41.61          | 65.0           |
| 0                  | 1   | 0   | 44.74          | 70.0           |
| 0                  | 1   | 1   | 50.0 (default) | 80.0           |
| 1                  | 0   | 0   | 52.5           | 45.0           |
| 1                  | 0   | 1   | 55.0           | 40.0           |
| 1                  | 1   | 0   | 57.5           | 60.0           |
| 1                  | 1   | 1   | 60.0           | 50.0 (default) |

**Note:** Consult Chrontel for other standard frequency table versions, exact output frequencies, and details about available custom patterns

**Table 3 • Absolute Maximum Ratings**

| Symbol | Description                                   | Value            | Unit |
|--------|-----------------------------------------------|------------------|------|
| VDD    | Power supply voltage with respect to GND      | -0.5 to +7.0     | V    |
| VIN    | Input voltage on any pins with respect to GND | -0.5 to VDD +0.5 | V    |
| TSTOR  | Storage temperature                           | -55 to +150      | °C   |

**Note:** Stresses greater than those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions above those indicated under the normal operating conditions is not recommended. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

**Table 4 • DC Specifications (Operating Conditions: TA = 0°C – 70°C, VDD = 5V ±5%)**

| Symbol | Description           | Test Condition @TA = 25°C                               | Min | Typ | Max | Unit |
|--------|-----------------------|---------------------------------------------------------|-----|-----|-----|------|
| VOH    | Output high voltage   | VDD = 4.75V, IOH = 4mA                                  | 2.4 |     |     | V    |
| VOL    | Output low voltage    | VDD = 4.75V, IOL = 8mA                                  |     |     | 0.4 | V    |
| VIH    | Input high voltage    |                                                         | 2.0 |     |     | V    |
| VIL    | Input low voltage     |                                                         |     |     | 0.8 | V    |
| IPU    | Input pull-up current |                                                         |     | 5   | 20  | µA   |
| ILK    | Input leakage current |                                                         | -10 |     | 10  | µA   |
| IDD    | Operating current     | VDD = 5V VCLK = 50MHz, No load<br>MCLK = 55MHz, No load |     | 45  |     | mA   |

**Table 5 • AC Specifications (Operating Conditions: TA = 0°C – 70°C, VDD = 5V ±5%)**

| Symbol  | Description                | Test Condition @TA = 25°C | Min | Typ    | Max | Unit  |
|---------|----------------------------|---------------------------|-----|--------|-----|-------|
| FIN     | Crystal / FREF input       |                           |     | 14.318 |     | MHz   |
| TSU     | Setup time, data to strobe |                           | 25  |        |     | ns    |
| THOLD   | Hold time, strobe to data  |                           | 25  |        |     | ns    |
| TSTROBE | Strobe pulse width         |                           | 50  |        |     | ns    |
| VCLK    | Video clock frequency      |                           | 8   |        | 135 | MHz * |
| MCLK    | Memory clock frequency     |                           | 8   |        | 135 | MHz * |
| TR      | Output clock rise time     | CL = 25pF, VOL – VOH      |     | 2      |     | ns    |
| TF      | Output clock fall time     | CL = 25pF, VOL – VOH      |     | 2      |     | ns    |
| TDC     | Output clock duty cycle    | VDD = 5V @VDD / 2         | 40  | 50     | 60  | %     |

**Note:** \* Output levels are guaranteed up to 90 MHz. Please consult ChronTEL for suggested circuit implementations for frequencies higher than 90 MHz

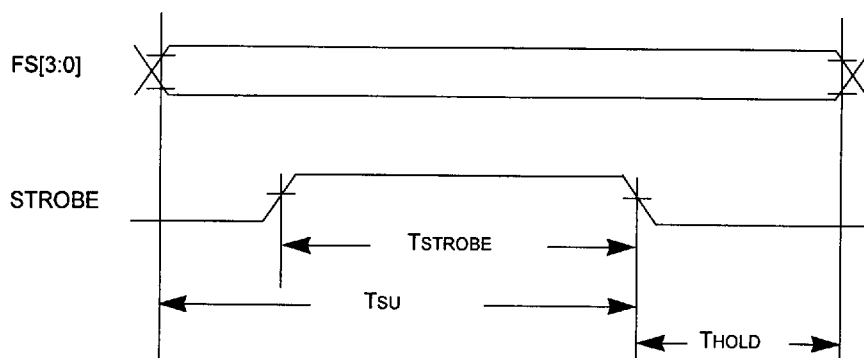


Figure 3: Strobe Timing Diagram

### Layout Considerations

To minimize phase noise and maximize performance, the following layout guidelines are recommended:

- Place all power supply bypass capacitors in close proximity to their respective power pins
- Use a ground plane to connect GND, AGND, and all external component grounds
- Avoid running any signal lines through the synthesizer section of the board

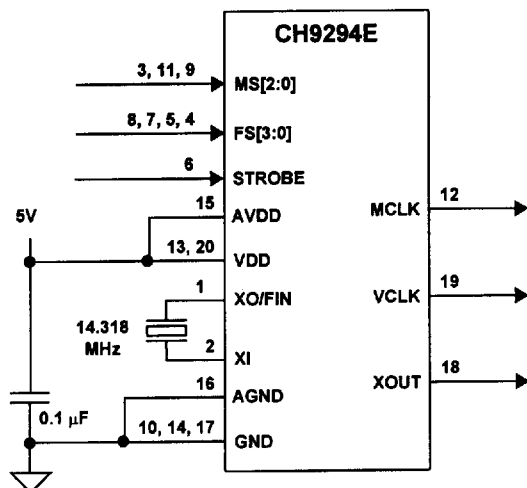


Figure 4: Application Schematic

| ORDERING INFORMATION              |              |                |                |
|-----------------------------------|--------------|----------------|----------------|
| Part number                       | Package type | Number of pins | Voltage supply |
| CH9294x-N                         | 300 mil PDIP | 20             | 5V             |
| CH9294x-S                         | 300 mil SOIC | 20             | 5V             |
| Note: x = frequency table version |              |                |                |