

**1M x 4 PAGE MODE CMOS
DYNAMIC RAM WITH
EXTENDED DATA OUTPUT**

HIGH PERFORMANCE	40	45	50	60
Max. $\overline{\text{RAS}}$ Access Time, (t_{RAC})	40 ns	45 ns	50 ns	60 ns
Max. Column Address Access Time, (t_{CAA})	20 ns	22 ns	24 ns	30 ns
Min. Extended Data Out Page Mode Cycle Time, (t_{PC})	15 ns	17 ns	19 ns	27 ns
Min. Read/Write Cycle Time, (t_{RC})	75 ns	80 ns	90 ns	110 ns

Features

- 1M x 4-bit organization
- $\overline{\text{RAS}}$ access time: 40, 45, 50, 60 ns
- Low power dissipation
- Read-Modify-Write, $\overline{\text{RAS}}$ -Only Refresh, $\overline{\text{CAS}}$ -Before- $\overline{\text{RAS}}$ Refresh
- Refresh Interval
 - V53C408H – 1,024 cycles/16 ms
- Available in 26/20-pin 300 mil SOJ
- Single +5V Power Supply
- TTL Interface
- EDO Page Mode operation

Description


The V53C408H is a 1,048,576 x 4 bit high-performance CMOS dynamic random access memory. The V53C408H offers Page mode operation with Extended Data Output. An address, $\overline{\text{CAS}}$ and $\overline{\text{RAS}}$ input capacitances are reduced to one quarter when the x4 DRAM is used to construct the same memory density. The V53C408H has symmetric address and accepts 1,024 cycle 16ms interval.

All inputs are TTL compatible. EDO Page Mode operation allows random access up to 1,024 x 4 bits, within a page, with cycle times as short as 15ns.

These features make the V53C408H ideally suited for a wide variety of high performance computer systems and peripheral applications.


Device Usage Chart

Operating Temperature Range	Package Outline	Access Time (ns)				Power	Temperature Mark
	K	40	45	50	60	Std.	
0°C to 70 °C	•	•	•	•	•	•	Blank

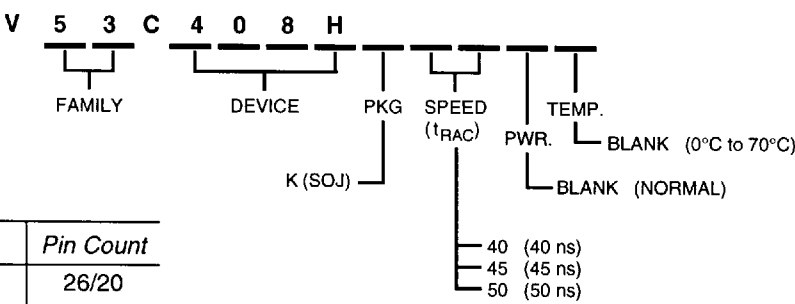

Description	Pkg.	Pin Count
SOJ	K	26/20

26/20 Lead SOJ Package
PIN CONFIGURATION
Top View

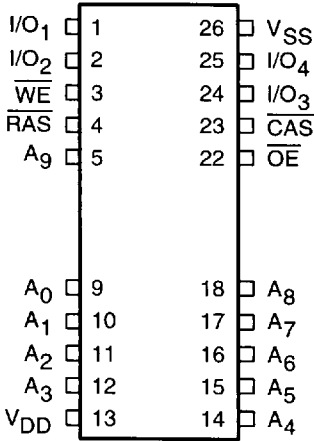

Pin Names

A ₀ -A ₉	Address Inputs
$\overline{RAS}$	Row Address Strobe
$\overline{CAS}$	Column Address Strobe
$\overline{WE}$	Write Enable
$\overline{OE}$	Output Enable
I/O ₀ -I/O ₄	Data Input, Output
V _{DD}	+5V Supply
V _{SS}	0V Supply
NC	No Connect

Absolute Maximum Ratings*

Ambient Temperature

Under Bias -10°C to $+80^{\circ}\text{C}$ Storage Temperature (plastic) -55°C to $+125^{\circ}\text{C}$ Voltage Relative to V_{SS} -1.0 V to $+7.0\text{ V}$

Data Output Current 50 mA


Power Dissipation 1.0 W

*Note: Operation above Absolute Maximum Ratings can adversely affect device reliability.

Capacitance* $T_A = 25^{\circ}\text{C}$, $V_{DD} = 5\text{ V} \pm 10\%$, $V_{SS} = 0\text{ V}$

Symbol	Parameter	Typ.	Max.	Unit
C_{IN1}	Address Input		6	pF
C_{IN2}	$\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, $\overline{\text{OE}}$		7	pF
C_{OUT}	Data Input/Output		7	pF

* Note: Capacitance is sampled and not 100% tested

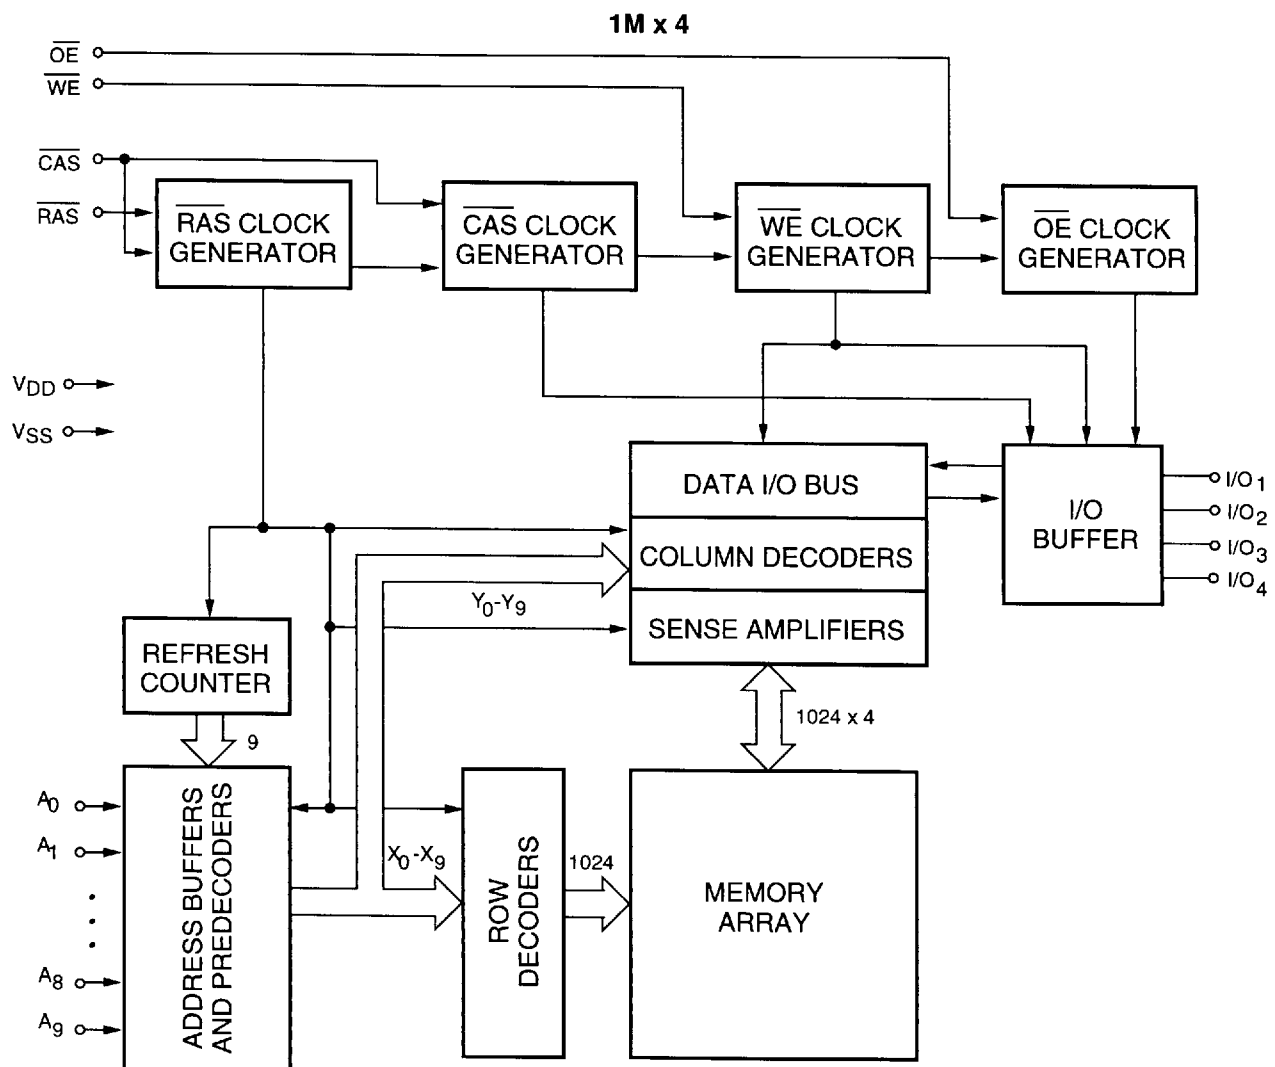Block Diagram

DC and Operating Characteristics (1-2)

$T_A = 0^\circ\text{C}$ to 70°C , $V_{CC} = 5\text{ V} \pm 10\%$, $V_{SS} = 0\text{ V}$, unless otherwise specified.

Symbol	Parameter	Access Time	V53C408H			Unit	Test Conditions	Notes
			Min.	Typ.	Max.			
I_{LI}	Input Leakage Current (any input pin)		-10		10	μA	$V_{SS} \leq V_{IN} \leq V_{CC}$	
I_{LO}	Output Leakage Current (for High-Z State)		-10		10	μA	$V_{SS} \leq V_{OUT} \leq V_{CC}$ $\overline{\text{RAS}}, \overline{\text{CAS}}$ at V_{IH}	
I_{CC1}	V_{CC} Supply Current, Operating	40			200	mA	$t_{RC} = t_{RC}(\text{min.})$	1, 2
		45			190			
		50			180			
		60			170			
I_{CC2}	V_{CC} Supply Current, TTL Standby				4	mA	$\overline{\text{RAS}}, \overline{\text{CAS}}$ at V_{IH} other inputs $\geq V_{SS}$	
I_{CC3}	V_{CC} Supply Current, $\overline{\text{RAS}}$ -Only Refresh	40			200	mA	$t_{RC} = t_{RC}(\text{min.})$	2
		45			190			
		50			180			
		60			170			
I_{CC4}	V_{CC} Supply Current, EDO Page Mode Operation	40			190	mA	Minimum Cycle	1, 2
		45			180			
		50			170			
		60			160			
I_{CC5}	V_{CC} Supply Current, Standby, Output Enabled other inputs $\geq V_{SS}$				2.0	mA	$\overline{\text{RAS}} = V_{IH}, \overline{\text{CAS}} = V_{IL}$	1
I_{CC6}	V_{CC} Supply Current, CMOS Standby				2.0	mA	$\overline{\text{RAS}} \geq V_{CC} - 0.2\text{ V}$, $\overline{\text{CAS}} \geq V_{CC} - 0.2\text{ V}$, All other inputs $\geq V_{SS}$	
V_{IL}	Input Low Voltage		-1		0.8	V		3
V_{IH}	Input High Voltage		2.0		$V_{CC} + 1$	V		3
V_{OL}	Output Low Voltage				0.4	V	$I_{OL} = 4.2\text{ mA}$	
V_{OH}	Output High Voltage		2.4			V	$I_{OH} = -5.0\text{ mA}$	

AC Characteristics

$T_A = 0^\circ\text{C}$ to 70°C , $V_{DD} = 5\text{ V} \pm 10\%$, $V_{SS} = 0\text{V}$ unless otherwise noted

AC Test conditions, input pulse levels 0 to 3V

#	JEDEC Symbol	Symbol	Parameter	40		45		50		60		Unit	Notes
				Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
1	t_{RL1RH1}	t_{RAS}	$\overline{RAS}$ Pulse Width	40	75K	45	75K	50	75K	60	75K	ns	
2	t_{RL2RL2}	t_{RC}	Read or Write Cycle Time	75		80		90		110		ns	
3	t_{RH2RL2}	t_{RP}	$\overline{RAS}$ Precharge Time	25		25		30		40		ns	
4	t_{RL1CH1}	t_{CSH}	$\overline{CAS}$ Hold Time	40		45		50		60		ns	
5	t_{CL1CH1}	t_{CAS}	$\overline{CAS}$ Pulse Width	8		9		10		15		ns	
6	t_{RL1CL1}	t_{RCD}	$\overline{RAS}$ to $\overline{CAS}$ Delay	17	28	18	32	19	36	20	45	ns	
7	t_{WH2CL2}	t_{RCS}	Read Command Setup Time	0		0		0		0		ns	4
8	t_{AVRL2}	t_{ASR}	Row Address Setup Time	0		0		0		0		ns	
9	t_{RL1AX}	t_{RAH}	Row Address Hold Time	7		8		9		10		ns	
10	t_{AVCL2}	t_{ASC}	Column Address Setup Time	0		0		0		0		ns	
11	t_{CL1AX}	t_{CAH}	Column Address Hold Time	5		6		7		10		ns	
12	$t_{CL1RH1(R)}$	$t_{RSH(R)}$	$\overline{RAS}$ Hold Time (Read Cycle)	12		13		14		15		ns	
13	t_{CH2RL2}	t_{CRP}	$\overline{CAS}$ to $\overline{RAS}$ Precharge Time	5		5		5		5		ns	
14	t_{CH2WX}	t_{RCH}	Read Command Hold Time Referenced to $\overline{CAS}$	0		0		0		0		ns	5
15	t_{RH2WX}	t_{RRH}	Read Command Hold Time Referenced to $\overline{RAS}$	0		0		0		0		ns	5
16	$t_{OEL1RH2}$	t_{ROH}	$\overline{RAS}$ Hold Time Referenced to $\overline{OE}$	8		9		10		10		ns	
17	t_{GL1QV}	t_{OAC}	Access Time from $\overline{OE}$		12		13		14		15	ns	12
18	t_{CL1QV}	t_{CAC}	Access Time from $\overline{CAS}$		12		13		14		15	ns	6, 7, 14
19	t_{RL1QV}	t_{RAC}	Access Time from $\overline{RAS}$		40		45		50		60	ns	6, 8, 9
20	t_{AVQV}	t_{CAA}	Access Time from Column Address		20		22		24		30	ns	6, 7, 10
21	t_{CL1QX}	t_{LZ}	$\overline{OE}$ or $\overline{CAS}$ to Low-Z Output	0		0		0		0		ns	16
22	t_{CH2QZ}	t_{HZ}	$\overline{OE}$ or $\overline{CAS}$ to High-Z Output	0	6	0	7	0	8	0	10	ns	16
23	t_{RL1AX}	t_{AR}	Column Address Hold Time from $\overline{RAS}$	30		35		40		50		ns	
24	t_{RL1AV}	t_{RAD}	$\overline{RAS}$ to Column Address Delay Time	12	20	13	23	14	26	15	30	ns	11
25	$t_{CL1RH1(W)}$	$t_{RSH(W)}$	$\overline{RAS}$ or $\overline{CAS}$ Hold Time in Write Cycle	12		13		14		15		ns	
26	t_{WL1CH1}	t_{CWL}	Write Command to $\overline{CAS}$ Lead Time	12		13		14		15		ns	
27	t_{WL1CL2}	t_{WCS}	Write Command Setup Time	0		0		0		0		ns	12, 13
28	t_{CL1WH1}	t_{WCH}	Write Command Hold Time	5		6		7		10		ns	
29	t_{WL1WH1}	t_{WP}	Write Pulse Width	5		6		7		10		ns	


AC Characteristics (Cont'd)

#	JEDEC Symbol	Symbol	Parameter	40		45		50		60		Unit	Notes
				Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
30	t_{RL1WH1}	t_{WCR}	Write Command Hold Time from $\overline{RAS}$	30		35		40		50		ns	
31	t_{WL1RH1}	t_{RWL}	Write Command to $\overline{RAS}$ Lead Time	12		13		14		15		ns	
32	t_{DVWL2}	t_{DS}	Data in Setup Time	0		0		0		0		ns	14
33	t_{WL1DX}	t_{DH}	Data in Hold Time	5		6		7		10		ns	14
34	t_{WL1GL2}	t_{WOH}	Write to $\overline{OE}$ Hold Time	6		7		8		10		ns	14
35	t_{GH2DX}	t_{OED}	$\overline{OE}$ to Data Delay Time	6		7		8		10		ns	14
36	t_{RL2RL2} (RMW)	t_{RWC}	Read-Modify-Write Cycle Time	110		115		130		170		ns	
37	t_{RL1RH1} (RMW)	t_{RRW}	Read-Modify-Write Cycle $\overline{RAS}$ Pulse Width	75		80		87		105		ns	
38	t_{CL1WL2}	t_{CWD}	$\overline{CAS}$ to $\overline{WE}$ Delay	30		32		34		40		ns	12
39	t_{RL1WL2}	t_{RWD}	$\overline{RAS}$ to $\overline{WE}$ Delay in Read-Modify-Write Cycle	58		62		68		85		ns	12
40	t_{CL1CH1}	t_{CRW}	$\overline{CAS}$ Pulse Width (RMW)	48		50		52		65		ns	
41	t_{AVWL2}	t_{AWD}	Col. Address to $\overline{WE}$ Delay	38		41		42		58		ns	12
42	t_{CL2CL2}	t_{PC}	EDO Fast Page Mode Read or Write Cycle Time	15		17		19		27		ns	
43	t_{CH2CL2}	t_{CP}	$\overline{CAS}$ Precharge Time	5		6		7		10		ns	
44	t_{AVRH1}	t_{CAR}	Column Address to $\overline{RAS}$ Setup Time	20		22		24		30		ns	
45	t_{CH2QV}	t_{CAP}	Access Time from Column Precharge		23		25		27		34	ns	7
46	t_{RL1DX}	t_{DHR}	Data in Hold Time Referenced to $\overline{RAS}$	30		35		40		50		ns	
47	t_{CL1RL2}	t_{CSR}	$\overline{CAS}$ Setup Time $\overline{CAS}$ -before- $\overline{RAS}$ Refresh	10		10		10		10		ns	
48	t_{RH2CL2}	t_{RPC}	$\overline{RAS}$ to $\overline{CAS}$ Precharge Time	0		0		0		0		ns	
49	t_{RL1CH1}	t_{CHR}	$\overline{CAS}$ Hold Time $\overline{CAS}$ -before- $\overline{RAS}$ Refresh	8		10		12		15		ns	
50	t_{CL2CL2}	t_{PCM}	EDO Page Mode Read-Modify-Write Cycle Time	60		65		70		85		ns	
51		t_{COH}	Output Hold After $\overline{CAS}$ Low	5		5		5		5		ns	
52	t_T	t_T	Transition Time (Rise and Fall)	3	50	3	50	3	50	3	50	ns	15
53		t_{REF}	Refresh Interval (512 Cycles)		16		16		16		16	ms	17

Notes:


1. I_{DD} is dependent on output loading when the device output is selected. Specified I_{DD} (max.) is measured with the output open.
2. I_{DD} is dependent upon the number of address transitions. Specified I_{DD} (max.) is measured with a maximum of two transitions per address cycle in EDO Page Mode.
3. Specified V_{IL} (min.) is steady state operating. During transitions, V_{IL} (min.) may undershoot to -1.0 V for a period not to exceed 20 ns. All AC parameters are measured with V_{IL} (min.) $\geq V_{SS}$ and V_{IH} (max.) $\leq V_{DD}$.
4. t_{RCD} (max.) is specified for reference only. Operation within t_{RCD} (max.) limits insures that t_{RAC} (max.) and t_{CAA} (max.) can be met. If t_{RCD} is greater than the specified t_{RCD} (max.), the access time is controlled by t_{CAA} and t_{CAC} .
5. Either t_{RRH} or t_{RCH} must be satisfied for a Read Cycle to occur.
6. Measured with a load equivalent to two TTL inputs and 50 pF.
7. Access time is determined by the longest of t_{CAA} , t_{CAC} and t_{CAP} .
8. Assumes that $t_{RAD} \leq t_{RAD}$ (max.). If t_{RAD} is greater than t_{RAD} (max.), t_{RAC} will increase by the amount that t_{RAD} exceeds t_{RAD} (max.).
9. Assumes that $t_{RCD} \leq t_{RCD}$ (max.). If t_{RCD} is greater than t_{RCD} (max.), t_{RAC} will increase by the amount that t_{RCD} exceeds t_{RCD} (max.).
10. Assumes that $t_{RAD} \geq t_{RAD}$ (max.).
11. Operation within the t_{RAD} (max.) limit ensures that t_{RAC} (max.) can be met. t_{RAD} (max.) is specified as a reference point only. If t_{RAD} is greater than the specified t_{RAD} (max.) limit, the access time is controlled by t_{CAA} and t_{CAC} .
12. t_{WCS} , t_{RWD} , t_{AWD} and t_{CWD} are not restrictive operating parameters.
13. t_{WCS} (min.) must be satisfied in an Early Write Cycle.
14. t_{DS} and t_{DH} are referenced to the latter occurrence of $\overline{CAS}$ or $\overline{WE}$.
15. t_T is measured between V_{IH} (min.) and V_{IL} (max.). AC-measurements assume $t_T = 3$ ns.
16. Assumes a three-state test load (5 pF and a 380 Ohm Thevenin equivalent).
17. An initial 200 μ s pause and 8 $\overline{RAS}$ -containing cycles are required when exiting an extended period of bias without clocks. An extended period of time without clocks is defined as one that exceeds the specified Refresh Interval.

Waveforms of Read Cycle

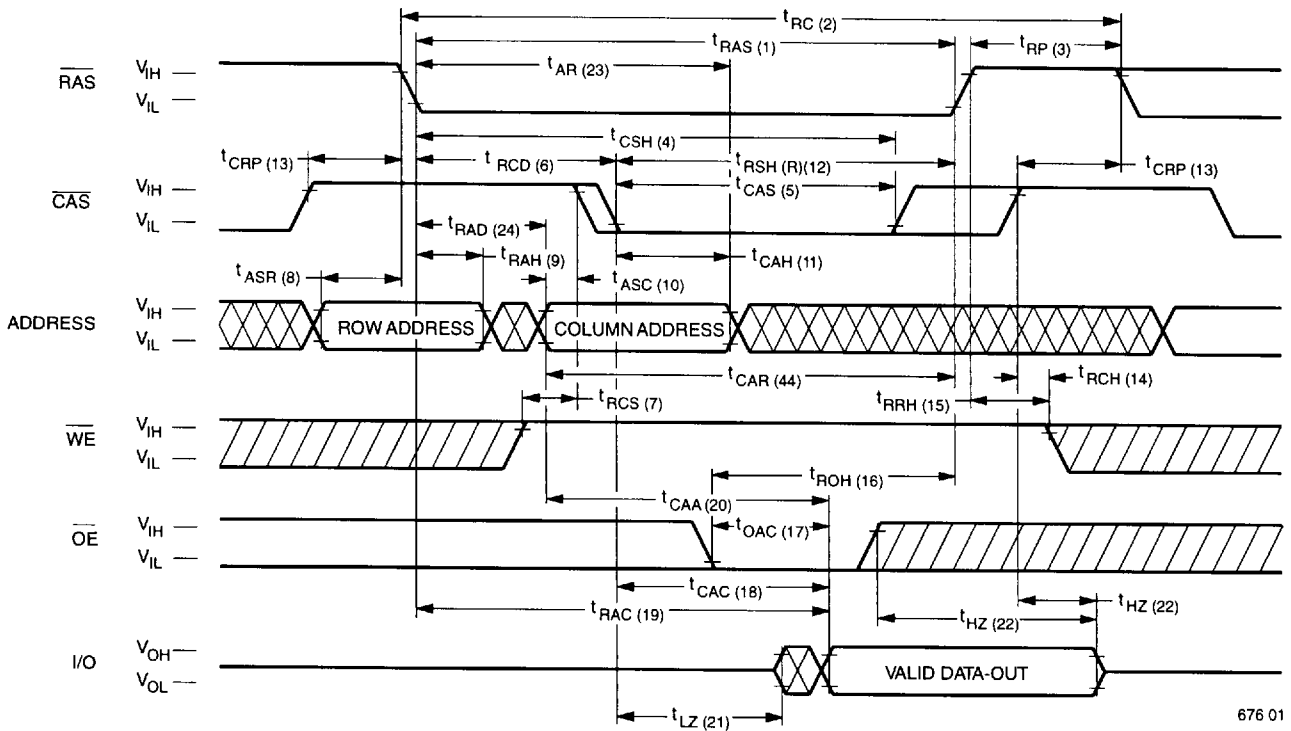

676 01

Waveforms of Early Write Cycle

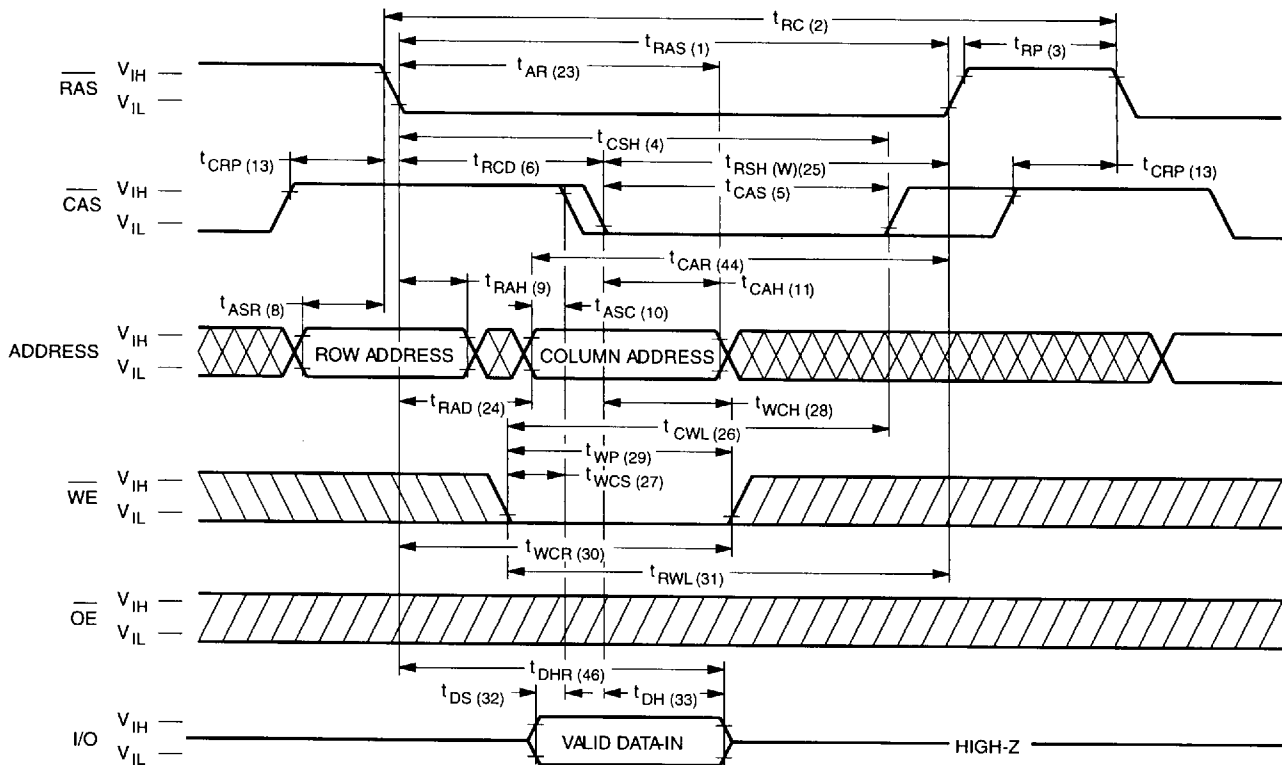


676 02



Don't Care




Undefined

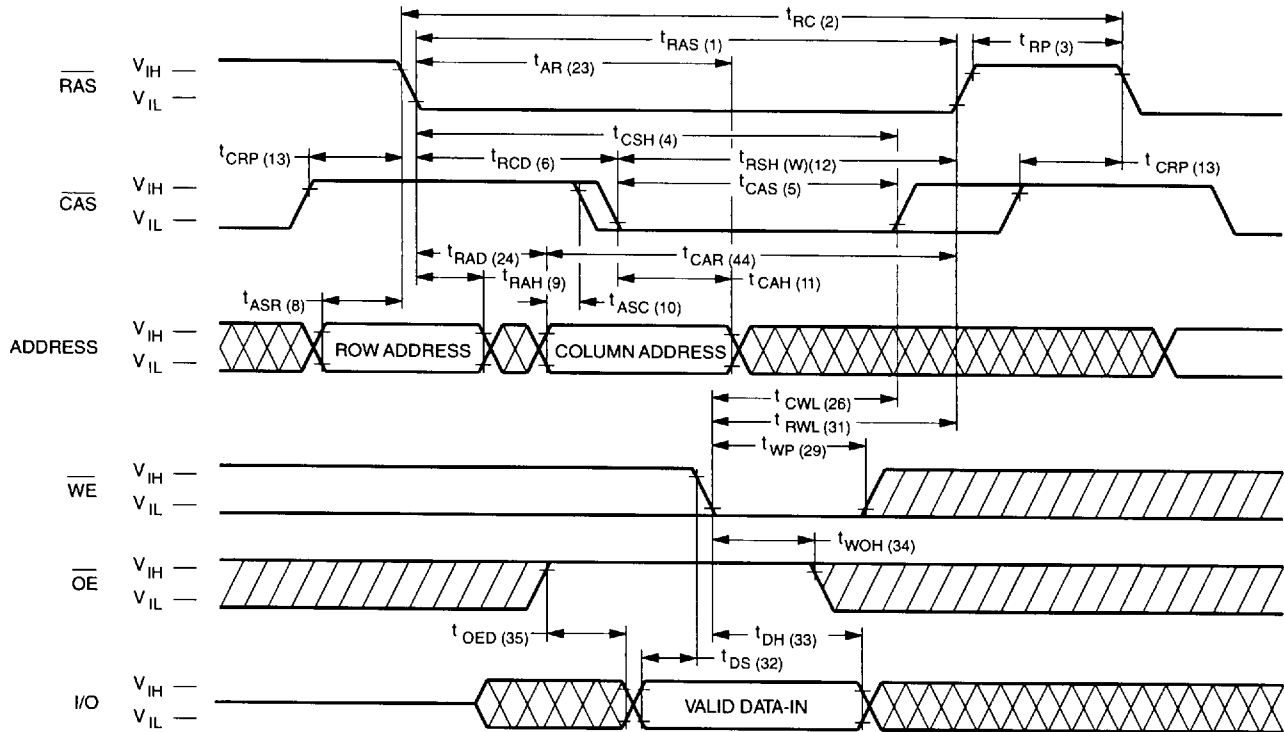Waveforms of $\overline{OE}$ -Controlled Write Cycle


676 03

Waveforms of Read-Modify-Write Cycle

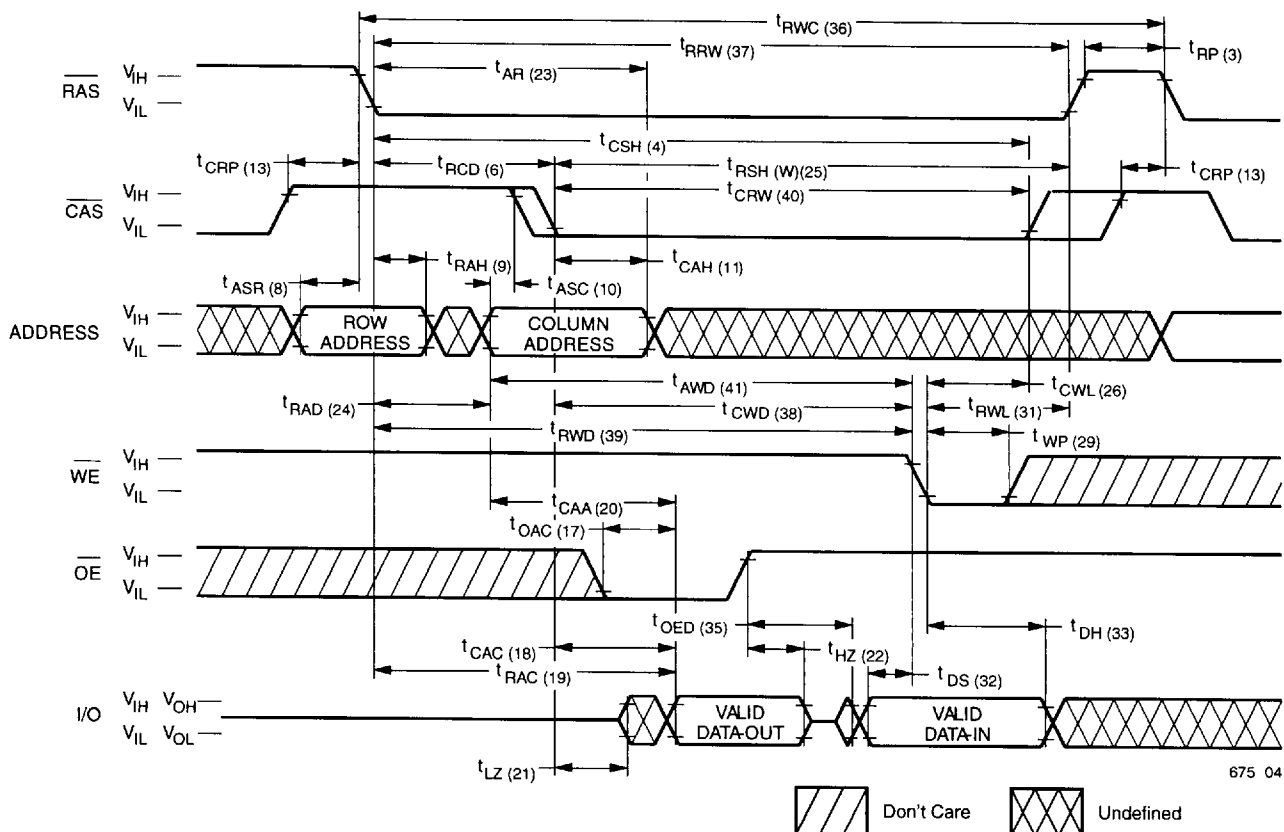


675 04


Waveforms of EDO Page Mode Read Cycle

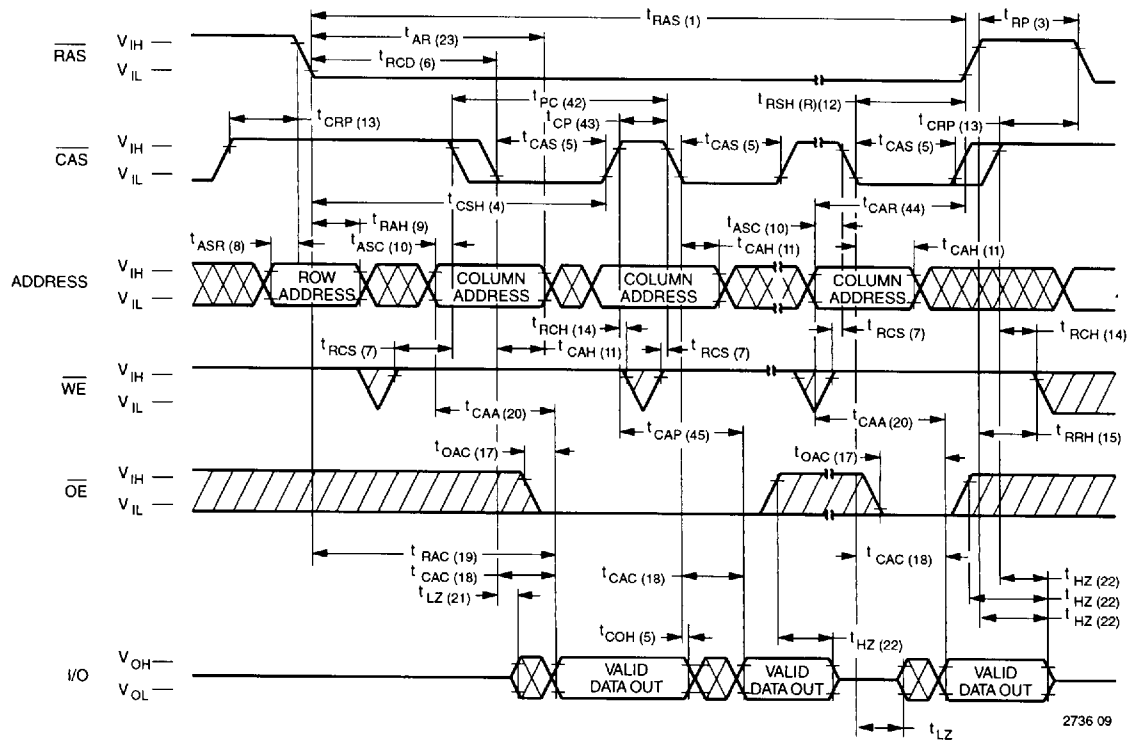


Waveforms of EDO Page Mode Write Cycle

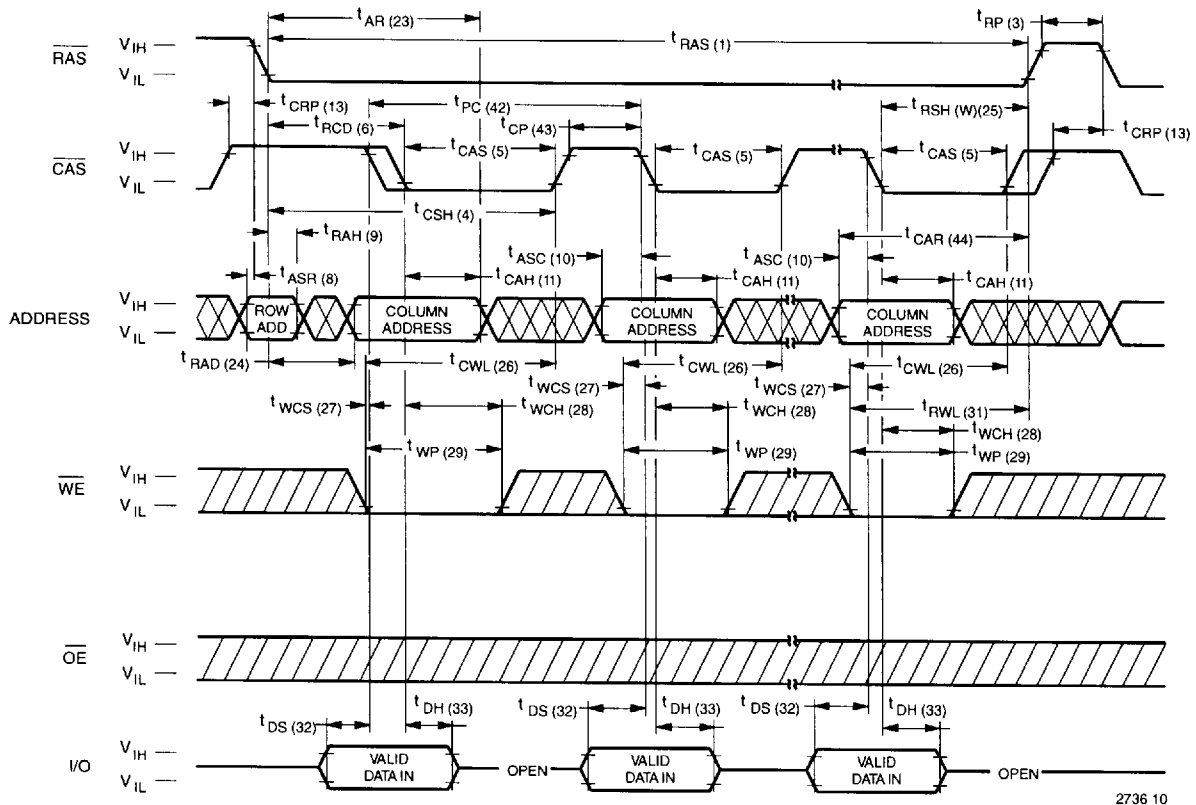

Waveforms of EDO Page Mode Read-Write Cycle

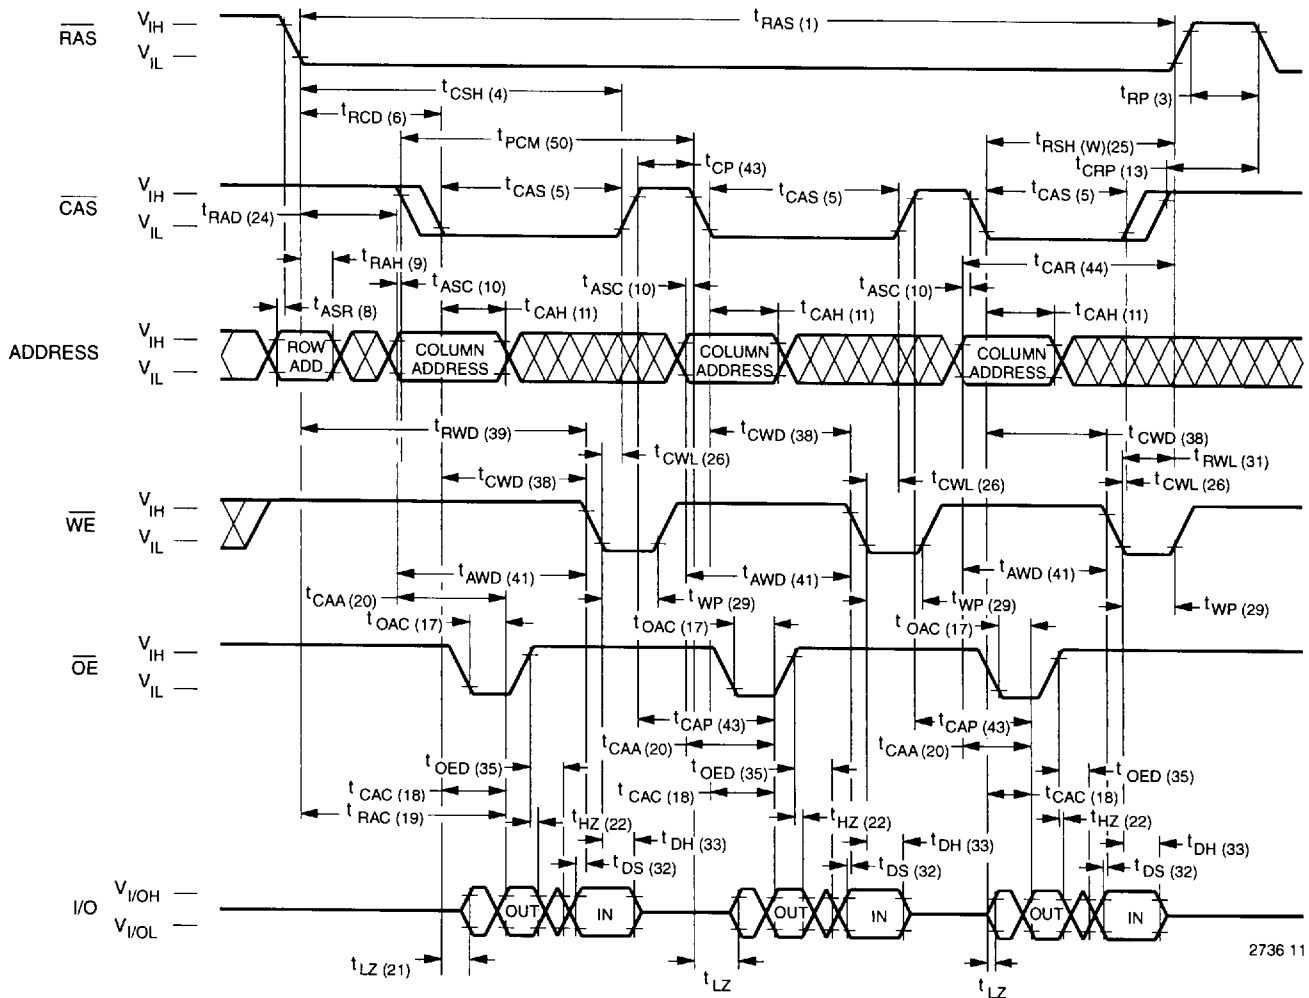

2736 11

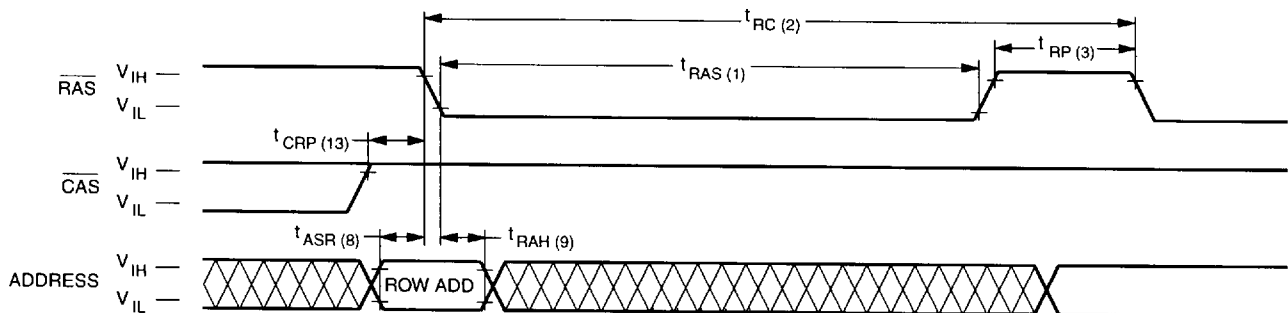Waveforms of $\overline{\text{RAS}}$ -Only Refresh Cycle


2736 12

NOTE: $\overline{\text{WE}}$, $\overline{\text{OE}}$ = Don't care


Don't Care



Undefined

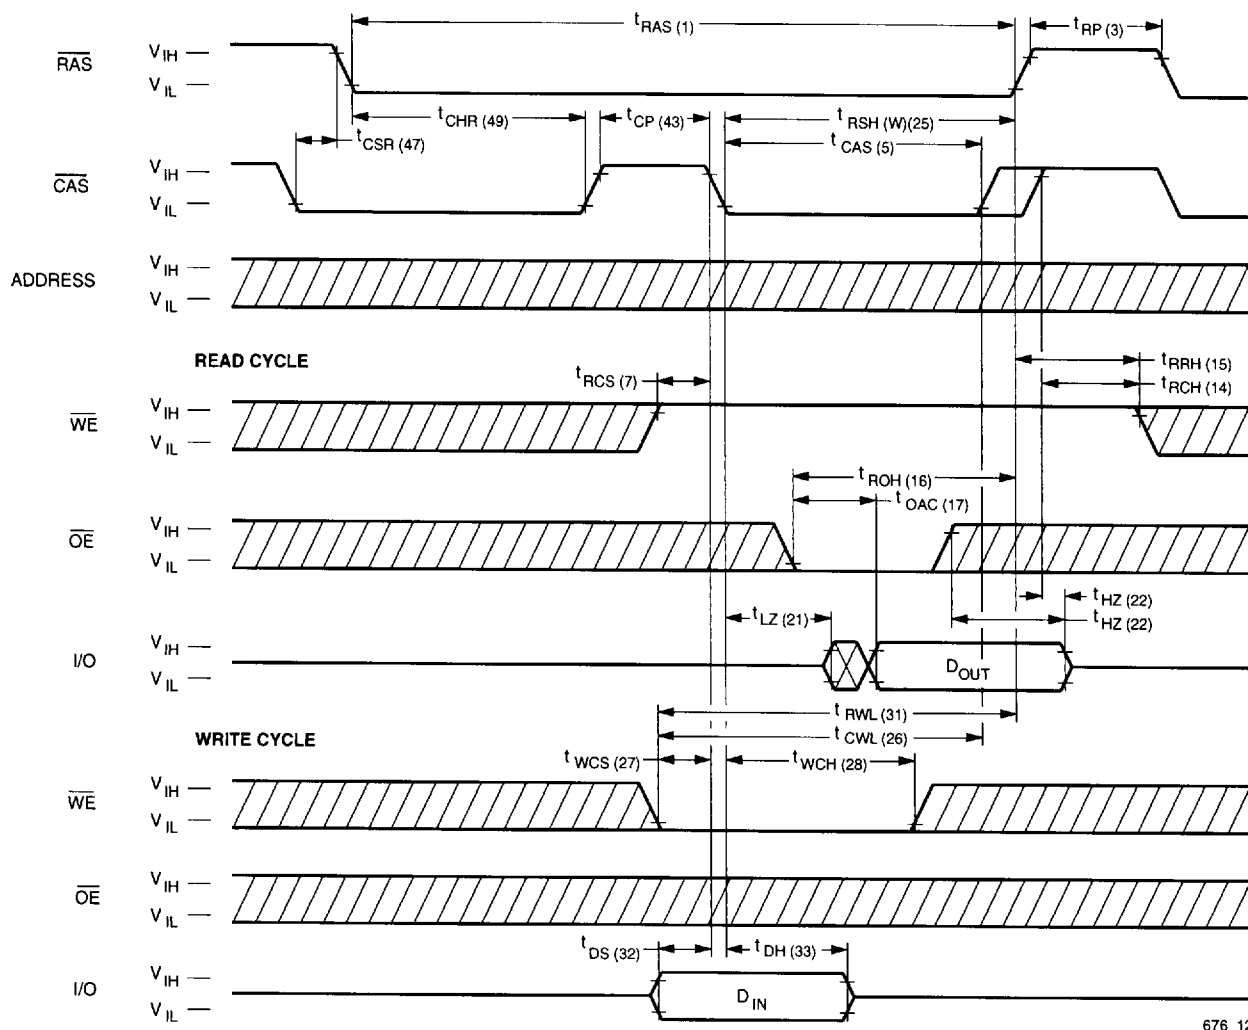Waveforms of $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ Refresh Counter Test Cycle

676 12

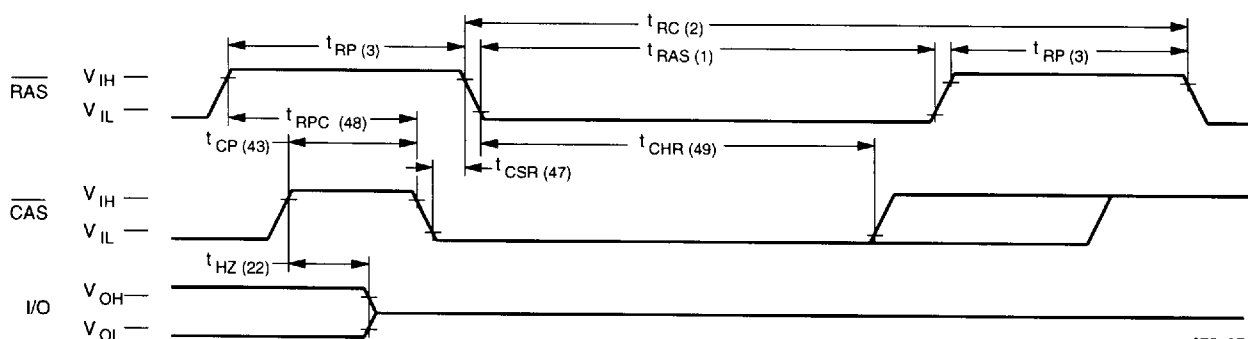Waveforms of $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ Refresh Cycle



675 07

NOTE: $\overline{\text{WE}}$, $\overline{\text{OE}}$, A_0-A_7 = Don't care

Don't Care



Undefined

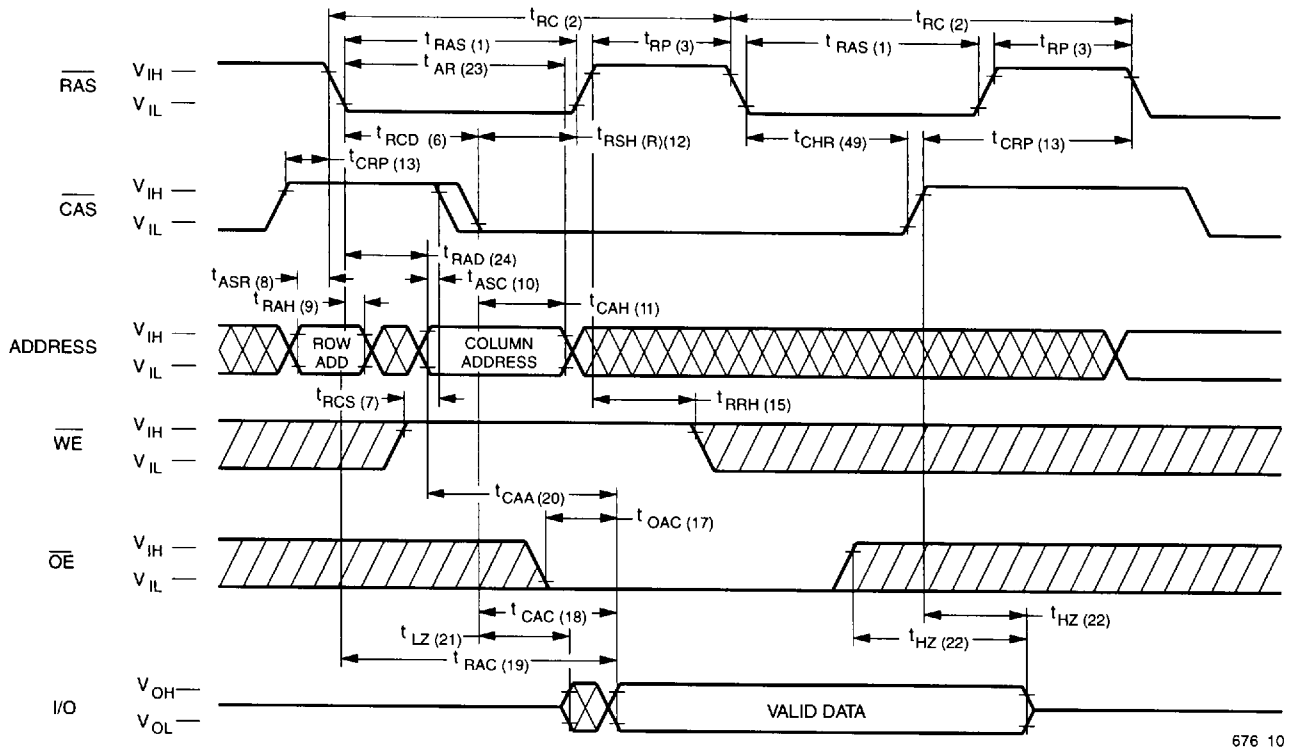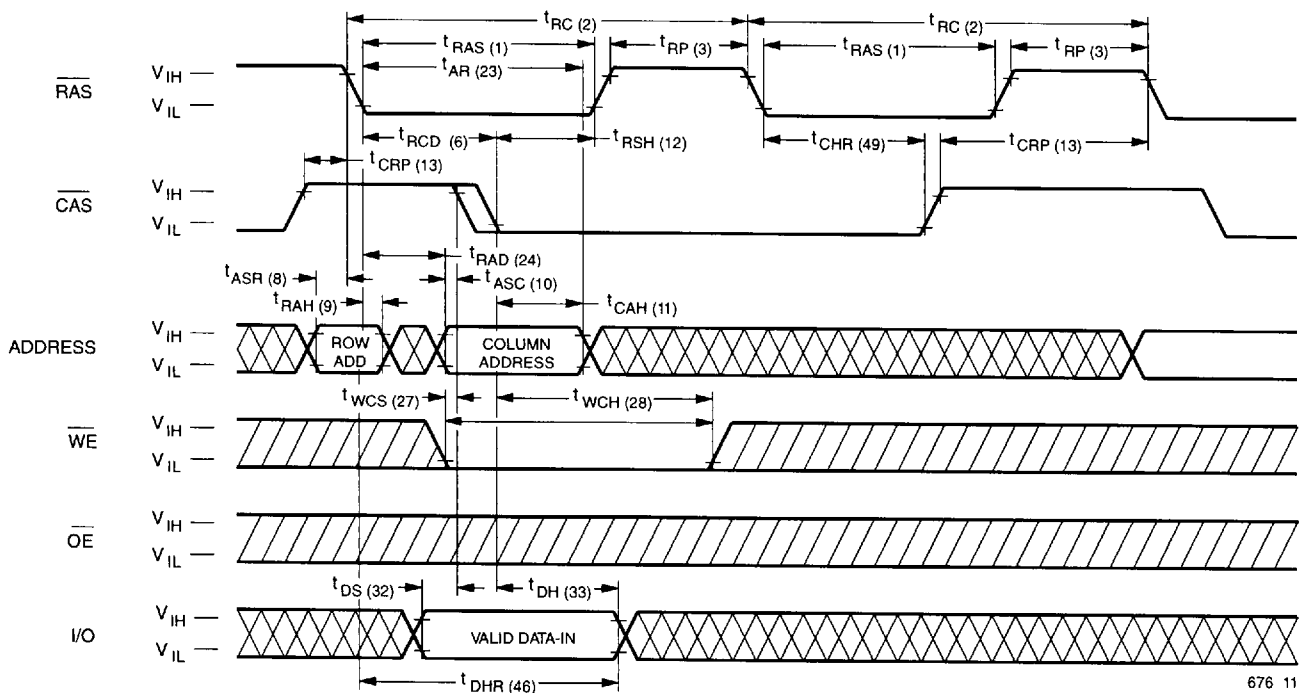Waveforms of Hidden Refresh Cycle (Read)**Waveforms of Hidden Refresh Cycle (Write)**

Don't Care



Undefined

Functional Description

The V53C408H is a CMOS dynamic RAM optimized for high data bandwidth, low power applications. It is functionally similar to a traditional dynamic RAM. The V53C408H reads and writes data by multiplexing an 20-bit address into a 10-bit row and a 10-bit column address. The row address is latched by the Row Address Strobe ($\overline{RAS}$). The column address "flows through" an internal address buffer and is latched by the Column Address Strobe ($\overline{CAS}$). Because access time is primarily dependent on a valid column address rather than the precise time that the $\overline{CAS}$ edge occurs, the delay time from $\overline{RAS}$ to $\overline{CAS}$ has little effect on the access time.

Memory Cycle

A memory cycle is initiated by bringing $\overline{RAS}$ low. Any memory cycle, once initiated, must not be ended or aborted before the minimum t_{RAS} time has expired. This ensures proper device operation and data integrity. A new cycle must not be initiated until the minimum precharge time t_{RP}/t_{CP} has elapsed.

Read Cycle

A Read cycle is performed by holding the Write Enable ($\overline{WE}$) signal High during a $\overline{RAS}/\overline{CAS}$ operation. The column address must be held for a minimum specified by t_{AR} . Data Out becomes valid only when t_{OAC} , t_{RAC} , t_{CAA} and t_{CAC} are all satisfied. As a result, the access time is dependent on the timing relationships between these parameters. For example, the access time is limited by t_{CAA} when t_{RAC} , t_{CAC} and t_{OAC} are all satisfied.

Write Cycle

A Write Cycle is performed by taking $\overline{WE}$ and $\overline{CAS}$ low during a $\overline{RAS}$ operation. The column address is latched by $\overline{CAS}$. The Write Cycle can be $\overline{WE}$ controlled or $\overline{CAS}$ controlled depending on whether $\overline{WE}$ or $\overline{CAS}$ falls later. Consequently, the input data must be valid at or before the falling edge of $\overline{WE}$ or $\overline{CAS}$, whichever occurs last. In the $\overline{CAS}$ -controlled Write Cycle, when the leading edge of $\overline{WE}$ occurs prior to the $\overline{CAS}$ low transition, the I/O data pins will be in the High-Z state at the beginning of the Write function. Ending the Write with $\overline{RAS}$ or $\overline{CAS}$ will maintain the output in the High-Z state.

In the $\overline{WE}$ controlled Write Cycle, $\overline{OE}$ must be in the high state and t_{OED} must be satisfied.

Extended Data Output Page Mode

EDO Page operation permits all 1024 columns within a selected row of the device to be randomly accessed at a high data rate. Maintaining $\overline{RAS}$ low while performing successive $\overline{CAS}$ cycles retains the row address internally and eliminates the need to reapply it for each cycle. The column address buffer acts as a transparent or flow-through latch while $\overline{CAS}$ is high. Thus, access begins from the occurrence of a valid column address rather than from the falling edge of $\overline{CAS}$, eliminating t_{ASC} and t_T from the critical timing path. $\overline{CAS}$ latches the address into the column address buffer. During EDO operation, Read, Write, Read-Modify-Write or Read-Write-Read cycles are possible at random addresses within a row. Following the initial entry cycle into Hyper Page Mode, access is t_{CAA} or t_{CAP} controlled. If the column address is valid prior to the rising edge of $\overline{CAS}$, the access time is referenced to the $\overline{CAS}$ rising edge and is specified by t_{CAP} . If the column address is valid after the rising $\overline{CAS}$ edge, access is timed from the occurrence of a valid address and is specified by t_{CAA} . In both cases, the falling edge of $\overline{CAS}$ latches the address and enables the output.

EDO provides a sustained data rate of 60 MHz for applications that require high bandwidth such as bit-mapped graphics or high-speed signal processing. The following equation can be used to calculate the maximum data rate:

$$\text{Data Rate} = \frac{1024}{t_{RC} + 1023 \times t_{PC}}$$

Data Output Operation

The V53C408H Input/Output is controlled by $\overline{OE}$, $\overline{CAS}$, $\overline{WE}$ and $\overline{RAS}$. A $\overline{RAS}$ low transition enables the transfer of data to and from the selected row address in the Memory Array. A $\overline{RAS}$ high transition disables data transfer and latches the output data if the output is enabled. After a memory cycle is initiated with a $\overline{RAS}$ low transition, a $\overline{CAS}$ low transition or $\overline{CAS}$ low level enables the internal I/O path. A $\overline{CAS}$ high transition or a $\overline{CAS}$ high level disables the I/O path and the output driver if it is enabled. A $\overline{CAS}$ low transition while $\overline{RAS}$ is high has no effect on the I/O data path or on the output drivers. The output drivers, when otherwise

enabled, can be disabled by holding $\overline{OE}$ high. The $\overline{OE}$ signal has no effect on any data stored in the output latches. A $\overline{WE}$ low level can also disable the output drivers when $\overline{CAS}$ is low. During a Write cycle, if $\overline{WE}$ goes low at a time in relationship to $\overline{CAS}$ that would normally cause the outputs to be active, it is necessary to use $\overline{OE}$ to disable the output drivers prior to the $\overline{WE}$ low transition to allow Data In Setup Time (t_{DS}) to be satisfied.


Power-On

After application of the V_{DD} supply, an initial pause of 200 μs is required followed by a minimum of 8 initialization cycles (any combination of cycles containing a $\overline{RAS}$ clock). Eight initialization cycles are required after extended periods of bias without clocks (greater than the Refresh Interval).

During Power-On, the V_{DD} current requirement of the V53C8256H is dependent on the input levels of $\overline{RAS}$ and $\overline{CAS}$. If $\overline{RAS}$ is low during Power-On, the device will go into an active cycle and I_{DD} will exhibit current transients. It is recommended that $\overline{RAS}$ and $\overline{CAS}$ track with V_{DD} or be held at a valid V_{IH} during Power-On to avoid current surges.

Table 1. V53C408H Data Output
Operation for Various Cycle Types

Cycle Type	I/O State
Read Cycles	Data from Addressed Memory Cell
$\overline{CAS}$ -Controlled Write Cycle (Early Write)	High-Z
$\overline{WE}$ -Controlled Write Cycle (Late Write)	$\overline{OE}$ Controlled. High $\overline{OE}$ = High-Z I/Os
Read-Modify-Write Cycles	Data from Addressed Memory Cell
EDO Read Cycle	Data from Addressed Memory Cell
EDO Write Cycle (Early Write)	High-Z
EDO Read-Modify-Write Cycle	Data from Addressed Memory Cell
$\overline{RAS}$ -only Refresh	High-Z
$\overline{CAS}$ -before- $\overline{RAS}$ Refresh Cycle	Data remains as in previous cycle
$\overline{CAS}$ -only Cycles	High-Z

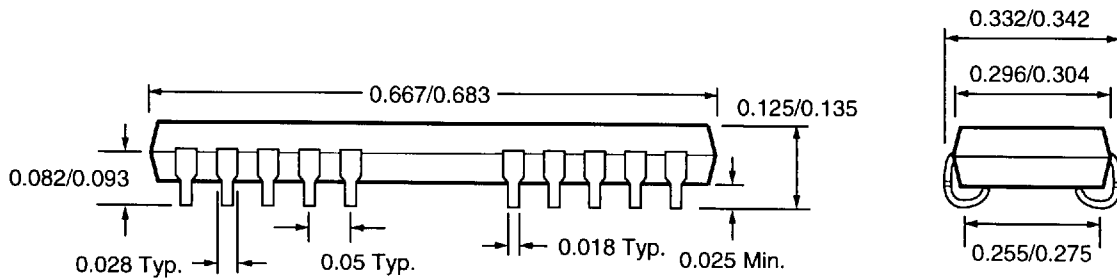Package Diagram**26/20-Pin 300 mil SOJ**

Unit: Inch

© Copyright 1996, MOSEL VITELIC Inc.

4/96

Printed in U.S.A.

The information in this document is subject to change without notice.

MOSEL VITELIC makes no commitment to update or keep current the information contained in this document. No part of this document may be copied or reproduced in any form or by any means without the prior written consent of MOSEL VITELIC.

MOSEL VITELIC subjects its products to normal quality control sampling techniques which are intended to provide an assurance of high quality products suitable for usual commercial applications. MOSEL VITELIC does not do testing appropriate to provide 100% product quality assurance and does not assume any liability for consequential or incidental arising from any use of its products. If such products are to be used in applications in which personal injury might occur from failure, purchaser must do its own quality assurance testing appropriate to such applications.