



W 5560

Features:

- hermetically sealed glass housing
- type 60 material

Application:

- burner control in parking heaters



TYP	R ₁₀ [kΩ]	R ₁₀₀ [kΩ]	R ₀₁ [kΩ]	R ₀₅ [kΩ]	V _{max} [V]	P _{max} [mW]	t _{an} [ms]	t _{ab} [ms]	TK [%K]
W 5560 11	1,1	0,27	5	15	125	350	60	35	0,3
5560 12	1,8	0,36	15	45	125	350	50	30	0,35
5560 13	4,5	0,56	45	135	125	350	35	28	0,4
5560 14	17,4	1,1	800	2.400	125	350	20	25	0,5
W 5560 21	2,6	0,68	10	30	250	350	60	35	0,3
5560 22	4,3	1,0	30	90	250	350	50	30	0,35
5560 23	10,2	2,6	100	300	250	350	35	28	0,4
W 5560 31	6,2	1,5	12	36	350	350	60	35	0,3
5560 32	10,2	2,2	38	110	350	350	50	30	0,35



W 9960

Features:

- epoxy-coated low profile cell
- high reliable power dissipation


Application:

- automatic light switching




TYP	R ₁₀ [kΩ]	R ₁₀₀ [kΩ]	R ₀₁ [kΩ]	R ₀₅ [kΩ]	V _{max} [V]	P _{max} [mW]	t _{an} [ms]	t _{ab} [ms]	TK [%K]
W 9960 11	1,1	0,27	5	15	125	350	60	35	0,3
9960 12	1,8	0,36	15	45	125	350	50	30	0,35
9960 13	4,5	0,56	45	135	125	350	35	28	0,4
9960 14	17,4	1,1	800	2.400	125	350	20	25	0,5
W 9960 21	2,6	0,68	10	30	250	350	60	35	0,3
9960 22	4,3	1,0	30	90	250	350	50	30	0,35
9960 23	10,2	2,6	100	300	250	350	35	28	0,4
W 9960 31	6,2	1,5	12	36	350	350	60	35	0,3
9960 32	10,2	2,2	38	110	350	350	50	30	0,35

W 5560... W 9960...

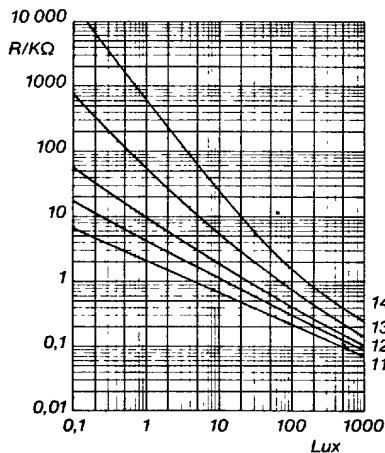

W 5560... W 9960...

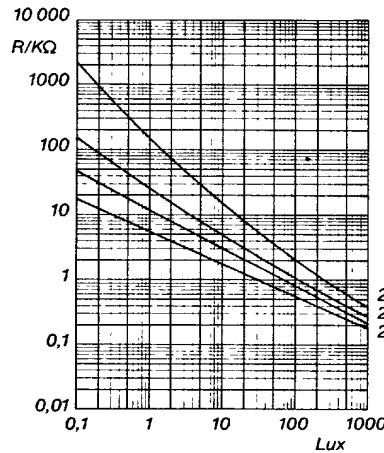

W 5560... W 9960...

