

V 1060

Features:

- T0-5 metal-glass housing
- type 60 material
- low temperature coefficient

Application:

- industrial control systems
- automatic lamp switching



V 1072

Features:

- T0-5 metal-glass housing
- type 72 material
- fast response

Application:

- light barriers
- automatic dimming devices

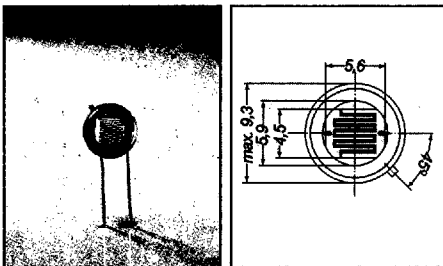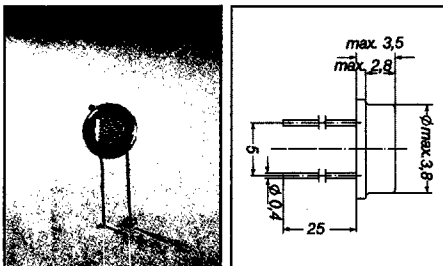

TYP	R ₁₀ [kΩ]	R ₀₁ [kΩ]	R ₀₅ [kΩ]	V _{max} [V]	P _{max} [mW]	t _{on} [ms]	t _{off} [ms]	TK [%/K]
V 1060 11	2,0	9	27	150	250	60	35	0,3
1060 12	3,4	27	81	150	250	50	30	0,35
1060 13	8,1	80	240	150	250	35	28	0,4
1060 14	30	2.000	6.000	150	250	20	25	0,5
V 1060 21	4,2	19	57	250	250	60	35	0,3
1060 22	7,0	55	165	250	250	50	30	0,35
V 1060 31	91	400	1.200	350	250	60	35	0,3
1060 32	152	1.200	3.600	350	250	50	30	0,35
V 1072 12	15,5	500	1.500	50	50	10	10	2

