



UTO/UTC 2032 Series
Thin-Film Cascadable Amplifier
1 to 2000 MHz

T-74-B-01

FEATURES

- Frequency Range: 1 to 2000 MHz
- Medium Gain: 10.0 dB (Typ)
- Low VSWR
- Temperature Compensated


APPLICATIONS

- IF/RF Amplification


DESCRIPTION

The 2032 Series is a wideband thin-film bipolar RF amplifier using resistive feedback and active bias for temperature compensation and increased immunity to bias voltage variations. Low input/output VSWR is maintained by inductive tuning,

and internal blocking capacitors couple the RF through the amplifier. The 2032 Series amplifiers are available in either the TO-8 hermetic case or connected TC-1 package.




UTO—TO-8U, p. 16-48



UTC—TC-1, p. 16-42



ELECTRICAL SPECIFICATIONS (Measured in a 50-ohm system @ +15 VDC nominal unless otherwise noted)

Symbol	Characteristic	Typical T ₀ = 25°C	Guaranteed Specifications		Unit
			T ₀ = 0° to 50°C	T ₀ = -55° to +85°C	
BW	Frequency Range	1-2000	1-2000	1-2000	MHz
GP	Small Signal Gain (Min.)	10.0	9.0	8.5	dB
—	Gain Flatness (Max.)	±0.6	±1.0	±1.0	dB
NF	Noise Figure (Max.)	5.0	6.0	6.0	dB
P _{1dB}	Power Output @ +1 dB Compression (Min.)	+7.50	+7.0	+6.5	dBm
—	Input VSWR (Max.)	<1.8:1	2.0:1	2.0:1	—
—	Output VSWR (Max.)	<1.4:1	2.0:1	2.0:1	—
IP ₃	Two Tone 3rd Order Intercept Point	+17.0	—	—	dBm
IP ₂	Two Tone 2nd Order Intercept Point	+23.0	—	—	dBm
HP ₂	One Tone 2nd Harmonic Intercept Point	+28.0	—	—	dBm
I _b	DC Current	25	—	—	mA

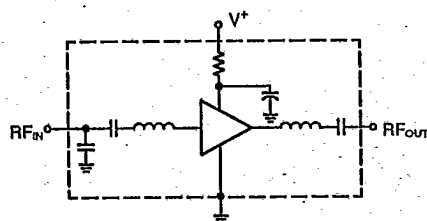SCHEMATIC**TYPICAL PERFORMANCE OVER TEMPERATURE**

(@ +15 VDC unless otherwise noted)

KEY: +25°C ———
+85°C - - - - -
-55°C - - - - -

**MAXIMUM RATINGS**

DC Voltage	17 Volts
Continuous RF Input Power	+13 dBm
Operating Case Temperature	-55°C to +125°C
Storage Temperature	-62°C to +150°C
"R" Series Burn-In Temperature	+125°C

THERMAL CHARACTERISTICS*

θ _{JA}	105°C/W
Active Transistor Power Dissipation	216 mW
Junction Temperature Above Case Temperature	23°C
MTBF (MIL-HDBK-217E, A _{UT} @ 90°C)	797,500 Hrs.


*For further information, see High Reliability section, p. 17-2.

WEIGHT: (typical) UTO—2.1 grams; UTC—21.5 grams

Avantek, Inc. • 481 Cottonwood Drive, Milpitas, CA 95035 • Contact your local representative, distributor or field sales office for further information. Listings are in the back of this Data Book.

UTO/UTC 2032 Series
Thin-Film Cascadable Amplifier

TYPICAL PERFORMANCE OVER TEMPERATURE (continued)

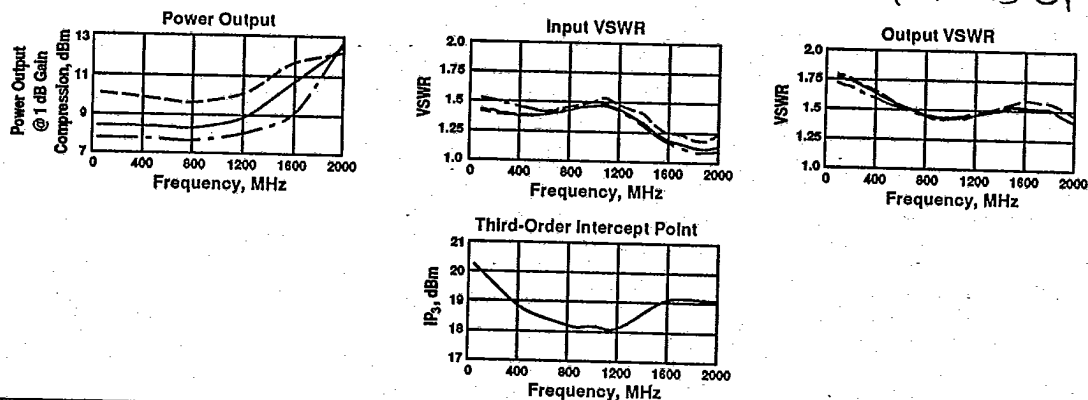

AUTOMATIC NETWORK ANALYZER MEASUREMENTS (Typical production unit @ +25°C ambient)

NUMERICAL READINGS

BIAS = 15.00 VOLTS

FREQ MHz	VSWR IN	GAIN dB	PHASE DEG	PHASE DEV	GPDEL ns	VSWR OUT	ISOL dB
100.0	1.28	10.45	166.48	-7.64	.00	1.62	18.02
200.0	1.29	10.39	154.11	-6.19	.35	1.59	18.22
300.0	1.32	10.35	141.35	-5.12	.36	1.58	18.22
400.0	1.36	10.39	128.99	-3.66	.33	1.58	18.32
500.0	1.40	10.44	117.02	-1.80	.33	1.57	18.42
600.0	1.46	10.46	105.27	.25	.32	1.56	18.60
700.0	1.50	10.50	93.48	2.30	.31	1.55	18.69
800.0	1.56	10.57	82.37	5.01	.34	1.55	18.83
900.0	1.60	10.71	70.04	6.49	.35	1.55	19.00
1000.0	1.63	10.87	57.02	7.27	.37	1.55	19.24
1100.0	1.64	11.05	43.12	7.18	.39	1.56	19.50
1200.0	1.61	11.20	28.58	6.47	.41	1.56	19.76
1300.0	1.58	11.29	13.37	5.09	.43	1.55	19.95
1400.0	1.48	11.33	-2.31	3.23	.43	1.53	20.00
1500.0	1.40	11.26	17.82	1.55	.44	1.48	19.84
1600.0	1.34	11.10	-33.49	-.28	.44	1.41	19.59
1700.0	1.29	10.95	-49.56	-2.52	.45	1.35	19.25
1800.0	1.31	10.89	65.62	-4.75	.44	1.31	18.95
1900.0	1.38	10.76	-81.80	-7.11	.46	1.32	18.65
2000.0	1.55	10.46	-99.32	-10.81	.51	1.41	18.52
2100.0	1.88	10.00	-118.20	—	.54	1.57	18.44
2200.0	2.33	9.26	-138.11	—	.56	1.77	18.60

S-PARAMETERS

BIAS = 15.00 VOLTS

FREQ MHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	Mag	Ang	dB	Ang	dB	Ang	Mag	Ang
100.00	.186	179.5	10.505	166.7	-18.576	-6.6	.268	166.3
200.00	.184	179.2	10.452	154.2	-18.519	-12.5	.261	153.2
300.00	.183	179.4	10.393	141.6	-18.585	-19.2	.254	139.8
400.00	.180	-179.5	10.405	129.1	-18.655	-25.5	.249	126.7
500.00	.185	-177.8	10.410	117.4	-18.645	-32.5	.239	115.3
600.00	.190	-175.8	10.410	105.9	-18.672	-39.2	.227	103.3
700.00	.204	-175.2	10.426	94.4	-18.801	-46.0	.212	91.3
800.00	.220	-175.7	10.456	83.7	-18.855	-52.7	.202	78.7
900.00	.239	-178.3	10.570	71.8	-18.982	-59.5	.190	65.0
1000.00	.257	-178.2	10.723	59.5	-19.201	-64.8	.184	49.7
1100.00	.267	172.4	10.906	46.1	-19.411	-71.3	.183	32.4
1200.00	.268	165.7	11.096	32.3	-19.628	-76.8	.189	13.7
1300.00	.257	157.9	11.236	17.4	-19.762	-81.5	.199	-5.4
1400.00	.232	149.7	11.306	2.2	-19.845	-86.1	.209	-24.5
1500.00	.201	141.9	11.242	13.1	-19.678	-91.0	.215	-42.0
1600.00	.165	134.8	11.088	-28.2	-19.386	-96.1	.213	-57.7
1700.00	.130	124.8	10.896	-43.7	-19.093	-101.6	.204	-69.8
1800.00	.098	109.6	10.809	-59.0	-18.775	-106.0	.184	-78.0
1900.00	.074	76.1	10.722	-73.9	-18.472	-114.9	.157	-80.1
2000.00	.085	23.5	10.578	-89.7	-18.191	-122.7	.132	-71.2
2100.00	.150	-12.3	10.340	-106.5	-17.919	-131.8	.139	-53.6
2200.00	.245	-34.2	10.002	-124.8	-17.733	-142.2	.188	-42.5
2300.00	.351	-51.3	8.410	-144.2	-17.726	-153.4	.257	-43.7
2400.00	.458	-67.1	8.497	-164.3	-17.882	-164.8	.327	-50.8
2500.00	.551	-81.4	7.273	176.0	-18.237	-176.1	.377	-59.9

Avantek, Inc. • 451 Cottonwood Drive, Milpitas, CA 95035

• Contact your local representative, distributor or field sales office for further information. Listings are in the back of this Data Book