

0.25 μm CMOS Gate Array **CMOS-10HD Family**



*High-density, high-speed 0.25 μm CMOS gate array
Supporting low internal power-supply voltage of 2.5/1.8V*

INTRODUCTION

This pamphlet summarizes information for learning about NEC Electronics' CMOS-10HD Family of high-speed, high-density CMOS gate arrays.

The following abbreviations are used for the package names in this pamphlet.

Abbreviation	Standard Package Name
QFP	Plastic QFP
PBGA	Plastic BGA
TBGA	Tape BGA
FPBGA™	Fine pitch plastic BGA

FEATURES

The CMOS-10HD family is a channel-less gate array to which a 0.25 μm CMOS process has been applied. This family supports a low internal power-supply voltage of 2.5/1.8 V and provides two types of power-line master; single power-supply and dual power-supply. This family can be applied to medium or large sized systems with a 2.5/1.8 V single drive or a 3.3/2.5 V and 3.3/1.8 V mixed interface.

High-Speed Operation

- 1.8 V operation (1.8 V interface, 3.3 V interface)

$t_{PD} = 129$ ps (2-input NAND, fan-out: 1, wiring length: 0 mm)
 $t_{PD} = 163$ ps (2-input NAND, fan-out: 1, standard wiring length)
 $t_{PD} = 146$ ps (2-input NAND, standard load)
 $t_{PD} = 139$ ps (2-input NAND (power gate), fan-out: 1, standard wiring length)
 $t_{PD} = 126$ ps (2-input NAND (power gate), standard load)
 $t_{PD} = 243$ ps (1.8 V input buffer, fan-out: 1, standard wiring length)
 $t_{PD} = 239$ ps (1.8 V input buffer, standard load)
 $t_{PD} = 353$ ps (3.3 V input buffer, fan-out: 1, standard wiring length)
 $t_{PD} = 342$ ps (3.3 V input buffer, standard load)
 $t_{PD} = 1246$ ps (1.8 V output buffer, $C_L = 15$ pF, $I_{OL} = 12$ mA)
 $t_{PD} = 1524$ ps (3.3 V output buffer, $C_L = 15$ pF, $I_{OL} = 12$ mA)

- 2.5 V operation (2.5 V interface, 3.3 V interface)

$t_{PD} = 85$ ps (2-input NAND, fan-out: 1, wiring length: 0 mm)
 $t_{PD} = 113$ ps (2-input NAND, fan-out: 1, standard wiring length)
 $t_{PD} = 99$ ps (2-input NAND, standard load)
 $t_{PD} = 91$ ps (2-input NAND (power gate), fan-out: 1, standard wiring length)
 $t_{PD} = 83$ ps (2-input NAND (power gate), standard load)
 $t_{PD} = 173$ ps (2.5 V input buffer, fan-out: 1, standard wiring length)
 $t_{PD} = 169$ ps (2.5 V input buffer, standard load)
 $t_{PD} = 294$ ps (3.3 V input buffer, fan-out: 1, standard wiring length)
 $t_{PD} = 289$ ps (3.3 V input buffer, standard load)
 $t_{PD} = 776$ ps (2.5 V output buffer, $C_L = 15$ pF, $I_{OL} = 12$ mA)
 $t_{PD} = 1169$ ps (3.3 V output buffer, $C_L = 15$ pF, $I_{OL} = 12$ mA)

Internal Blocks

- High-speed block
- Low power block
- Scan path block
- Driver for clock tree synthesis

Memory Blocks


- Synchronous compiled single-port RAM
- Synchronous compiled dual-port RAM

Abundance of Peripheral Blocks

- 1.8 V input, output, I/O buffer
- 2.5 V input, output, I/O buffer
- LVTTTL input, output, I/O buffer
- LVTTTL input buffer with fail-safe function
- 1.8 V input buffer with fail-safe function
- 2.5 V input buffer with fail-safe function
- Buffer for PCI bus specification
- Middle-noise output buffer (1.8 V, 2.5 V, LVTTTL interface)
- Low-noise output buffer (1.8 V, 2.5 V, LVTTTL interface)
- Buffer with on-chip pull-up resistor (5 k Ω /100 k Ω)
- Buffer with on-chip pull-down resistor (100 k Ω)
- Phase control digital PLL
- Multiplication digital PLL
- SSTL2, SSTL3
- GTL+
- LVDS
- PECL

Multifarious Function Block Mounting Capability

The function blocks ensure functional compatibility with conventional products and facilitate transfer or appropriation of existing design data.

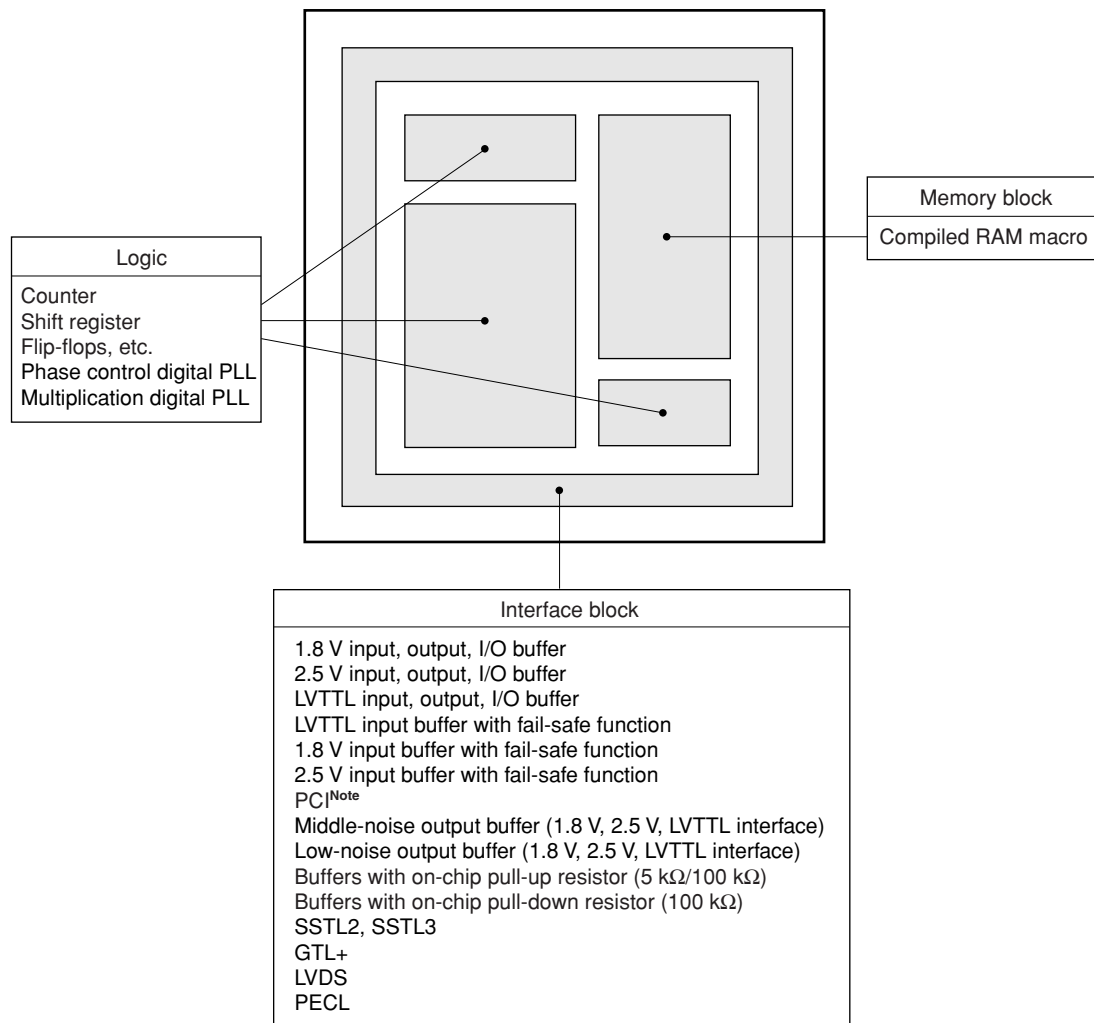

Note Standard interface recommended by Intel Corp. (PCI = Peripheral Component Interconnect)

PRODUCT OUTLINE

List of Product Types

3-layer master	Single power supply	μ PD65301 μ PD65321	μ PD65302 μ PD65322	μ PD65303 μ PD65323	μ PD65304 μ PD65324	μ PD65305 μ PD65325
	Dual power supply	μ PD65341 μ PD65361	μ PD65342 μ PD65362	μ PD65343 μ PD65363	μ PD65344 μ PD65364	μ PD65345 μ PD65365
Number of cells placed		58682	128338	192058	299472	409920
Number of usable gates		38143	83420	124837	194657	245952
4-layer master	Single power supply	μ PD65501 μ PD65521	μ PD65502 μ PD65522	μ PD65503 μ PD65523	μ PD65504 μ PD65524	μ PD65505 μ PD65525
	Dual power supply	μ PD65541 μ PD65561	μ PD65542 μ PD65562	μ PD65543 μ PD65563	μ PD65544 μ PD65564	μ PD65545 μ PD65565
Number of cells placed		58682	128338	192058	299472	409920
Number of usable gates		41077	89837	134441	209630	266448

3-layer master	Single power supply	μ PD65306 μ PD65326	μ PD65307 μ PD65327	μ PD65308 μ PD65328	μ PD65309 μ PD65329	μ PD65310 μ PD65330	μ PD65311 μ PD65331
	Dual power supply	μ PD65346 μ PD65366	μ PD65347 μ PD65367	μ PD65348 μ PD65368	μ PD65349 μ PD65369	μ PD65350 μ PD65370	μ PD65351 μ PD65371
Number of cells placed		545008	721224	1014542	1404790	1974700	2605764
Number of usable gates		299754	396673	557998	702395	987350	1302882
4-layer master	Single power supply	μ PD65506 μ PD65526	μ PD65507 μ PD65527	μ PD65508 μ PD65528	μ PD65509 μ PD65529	μ PD65510 μ PD65530	μ PD65511 μ PD65531
	Dual power supply	μ PD65546 μ PD65566	μ PD65547 μ PD65567	μ PD65548 μ PD65568	μ PD65549 μ PD65569	μ PD65550 μ PD65570	μ PD65551 μ PD65571
Number of cells placed		545008	721224	1014542	1404790	1974700	2605764
Number of usable gates		354255	468796	659452	842874	1184820	1563458

List of Packages

Single power supply

(1/4)

Package	Number of Pins	Lead Pitch	Body Size (mm)	Body Thickness	μ PD65301 μ PD65501	μ PD65302 μ PD65502	μ PD65303 μ PD65503	μ PD65304 μ PD65504	μ PD65305 μ PD65505
QFP (fine pitch)	144	0.5 mm	20 × 20	2.70 mm	—				
	160	0.5 mm	24 × 24	2.70 mm	—				
	208	0.5 mm	28 × 28	3.20 mm	—	—			
	240	0.5 mm	32 × 32	3.20 mm	—	—	—		
	304	0.5 mm	40 × 40	3.70 mm	—	—	—	—	—
TQFP	48	0.5 mm	7 × 7	1.00 mm	○	—	—	—	—
	64	0.5 mm	10 × 10	1.00 mm	—			—	—
	80	0.5 mm	12 × 12	1.00 mm	—				
	120	0.4 mm	14 × 14	1.00 mm	—	—	—		
LQFP	44	0.8 mm	10 × 10	1.40 mm					—
	100	0.5 mm	14 × 14	1.40 mm	—	—	—		
	144	0.5 mm	20 × 20	1.40 mm	—		—		
FPBGA	108	0.8 mm, perimeter	11 × 11	1.51 mm					
	144	0.8 mm, perimeter	13 × 13	1.51 mm	—				
	160	0.8 mm, perimeter	13 × 13	1.51 mm	—				
	208	0.8 mm, perimeter	15 × 15	1.51 mm	—	—	—		
	240	0.8 mm, perimeter	19 × 19	1.51 mm	—	—	—		
	304	0.8 mm, perimeter	19 × 19	1.51 mm	—	—	—	—	
PBGA	256	1.27 mm, perimeter	27 × 27	2.13 mm	—	—	—		
	313	1.27 mm, staggered	35 × 35	2.33 mm	—	—	—	—	—
	352	1.27 mm, perimeter	35 × 35	2.33 mm	—	—	—	—	—

Remarks 1. ○: Already shifted, Blank: Under study, —: Cannot be used
2. μ PD653xx: 3-layer product, μ PD655xx: 4-layer product

List of Packages

Single power supply

(2/4)

Package	Number of Pins	Lead Pitch	Body Size (mm)	Body Thickness	μ PD65306 μ PD65506	μ PD65307 μ PD65507	μ PD65308 μ PD65508	μ PD65309 μ PD65509	μ PD65310 μ PD65510	μ PD65311 μ PD65511
QFP (fine pitch)	144	0.5 mm	20 × 20	2.70 mm						
	160	0.5 mm	24 × 24	2.70 mm					○	
	208	0.5 mm	28 × 28	3.20 mm						
	240	0.5 mm	32 × 32	3.20 mm						
	304	0.5 mm	40 × 40	3.70 mm	—					
TQFP	48	0.5 mm	7 × 7	1.00 mm	—	—	—	—	—	—
	64	0.5 mm	10 × 10	1.00 mm	—	—	—	—	—	—
	80	0.5 mm	12 × 12	1.00 mm				—	—	—
	120	0.4 mm	14 × 14	1.00 mm					—	—
LQFP	44	0.8 mm	10 × 10	1.40 mm	—	—	—	—	—	—
	100	0.5 mm	14 × 14	1.40 mm					—	—
	144	0.5 mm	20 × 20	1.40 mm						
FPBGA	108	0.8 mm, perimeter	11 × 11	1.51 mm		—	—	—	—	—
	144	0.8 mm, perimeter	13 × 13	1.51 mm	—		—	—	—	—
	160	0.8 mm, perimeter	13 × 13	1.51 mm					—	—
	208	0.8 mm, perimeter	15 × 15	1.51 mm						—
	240	0.8 mm, perimeter	19 × 19	1.51 mm						
	304	0.8 mm, perimeter	19 × 19	1.51 mm						
PBGA	256	1.27 mm, perimeter	27 × 27	2.13 mm						—
	313	1.27 mm, staggered	35 × 35	2.33 mm						
	352	1.27 mm, perimeter	35 × 35	2.33 mm						

Remarks 1. ○: Already shifted, Blank: Under study, —: Cannot be used
2. μ PD653xx: 3-layer product, μ PD655xx: 4-layer product

List of Packages

Single power supply

(3/4)

Package	Number of Pins	Lead Pitch	Body Size (mm)	Body Thickness	μ PD65321 μ PD65521	μ PD65322 μ PD65522	μ PD65323 μ PD65523	μ PD65324 μ PD65524	μ PD65325 μ PD65525	μ PD65326 μ PD65526
TQFP	64	0.5 mm	10 × 10	1.00 mm		—	—	—	—	—
	80	0.5 mm	12 × 12	1.00 mm		—	—	—	—	—
	100	0.5 mm	14 × 14	1.00 mm				—	—	—
	120	0.4 mm	14 × 14	1.00 mm	—			—	—	—
LQFP	100	0.5 mm	14 × 14	1.40 mm				—	—	—
	144	0.5 mm	20 × 20	1.40 mm	—	—		—	—	—
TBGA ^{Note}	256	1.27 mm, perimeter	27 × 27	1.40 mm	—	—	—			
	352	1.27 mm, perimeter	35 × 35	1.40 mm	—	—	—	—	—	
	420	1.27 mm, perimeter	35 × 35	1.40 mm	—	—	—	—	—	—
	500	1.27 mm, perimeter	40 × 40	1.40 mm	—	—	—	—	—	—
	576	1.27 mm, perimeter	40 × 40	1.40 mm	—	—	—	—	—	—

Note With heat spreader

- Remarks**
- Blank: Under study, —: Cannot be used
 - μ PD653xx: 3-layer product, μ PD655xx: 4-layer product

Single power supply

(4/4)

Package	Number of Pins	Lead Pitch	Body Size (mm)	Body Thickness	μ PD65327 μ PD65527	μ PD65328 μ PD65528	μ PD65329 μ PD65529	μ PD65330 μ PD65530	μ PD65331 μ PD65531
TQFP	64	0.5 mm	10 × 10	1.00 mm	—	—	—	—	—
	80	0.5 mm	12 × 12	1.00 mm	—	—	—	—	—
	100	0.5 mm	14 × 14	1.00 mm	—	—	—	—	—
	120	0.4 mm	14 × 14	1.00 mm	—	—	—	—	—
LQFP	100	0.5 mm	14 × 14	1.40 mm	—	—	—	—	—
	144	0.5 mm	20 × 20	1.40 mm	—	—	—	—	—
TBGA ^{Note}	256	1.27 mm, perimeter	27 × 27	1.40 mm					
	352	1.27 mm, perimeter	35 × 35	1.40 mm					
	420	1.27 mm, perimeter	35 × 35	1.40 mm					
	500	1.27 mm, perimeter	40 × 40	1.40 mm	—				
	576	1.27 mm, perimeter	40 × 40	1.40 mm	—	—			

Note With heat spreader

- Remarks**
- Blank: Under study, —: Cannot be used
 - μ PD653xx: 3-layer product, μ PD655xx: 4-layer product

List of Packages

Dual power supply

(1/4)

Package	Number of Pins	Lead Pitch	Body Size (mm)	Body Thickness	μ PD65341 μ PD65541	μ PD65342 μ PD65542	μ PD65343 μ PD65543	μ PD65344 μ PD65544	μ PD65345 μ PD65545
QFP (fine pitch)	144	0.5 mm	20 × 20	2.70 mm	—	○			
	160	0.5 mm	24 × 24	2.70 mm	—				
	208	0.5 mm	28 × 28	3.20 mm	—	—		○	
	304	0.5 mm	40 × 40	3.70 mm	—	—	—	—	—
TQFP	48	0.5 mm	7 × 7	1.00 mm		—	—	—	—
	64	0.5 mm	10 × 10	1.00 mm	—			—	—
	80	0.5 mm	12 × 12	1.00 mm	—				
	120	0.4 mm	14 × 14	1.00 mm	—	—	—		
LQFP	44	0.8 mm	10 × 10	1.40 mm					—
	100	0.5 mm	14 × 14	1.40 mm	—	—	—		
	144	0.5 mm	20 × 20	1.40 mm	—		—		
FPBGA	108	0.8 mm, perimeter	11 × 11	1.51 mm	○				○
	144	0.8 mm, perimeter	13 × 13	1.51 mm	—				
	160	0.8 mm, perimeter	13 × 13	1.51 mm	—				
	208	0.8 mm, perimeter	15 × 15	1.51 mm	—	—	—	○	○
	240	0.8 mm, perimeter	19 × 19	1.51 mm	—	—	—		○
	304	0.8 mm, perimeter	19 × 19	1.51 mm	—	—	—	—	
PBGA	256	1.27 mm, perimeter	27 × 27	2.13 mm	—	—	—		
	313	1.27 mm, staggered	35 × 35	2.33 mm	—	—	—	—	—
	352	1.27 mm, perimeter	35 × 35	2.33 mm	—	—	—	—	—

Remarks 1. ○: Already shifted, Blank: Under study, —: Cannot be used
 2. μ PD653xx: 3-layer product, μ PD655xx: 4-layer product

List of Packages

Dual power supply

(2/4)

Package	Number of Pins	Lead Pitch	Body Size (mm)	Body Thickness	μ PD65346 μ PD65546	μ PD65347 μ PD65547	μ PD65348 μ PD65548	μ PD65349 μ PD65549	μ PD65350 μ PD65550	μ PD65351 μ PD65551
QFP (fine pitch)	144	0.5 mm	20 × 20	2.70 mm						
	160	0.5 mm	24 × 24	2.70 mm						
	208	0.5 mm	28 × 28	3.20 mm			○			
	304	0.5 mm	40 × 40	3.70 mm	—	○				
TQFP	48	0.5 mm	7 × 7	1.00 mm	—	—	—	—	—	—
	64	0.5 mm	10 × 10	1.00 mm	—	—	—	—	—	—
	80	0.5 mm	12 × 12	1.00 mm				—	—	—
	120	0.4 mm	14 × 14	1.00 mm					—	—
LQFP	44	0.8 mm	10 × 10	1.40 mm	—	—	—	—	—	—
	100	0.5 mm	14 × 14	1.40 mm	○	○	○	○	—	—
	144	0.5 mm	20 × 20	1.40 mm						
FPBGA	108	0.8 mm, perimeter	11 × 11	1.51 mm		—	—	—	—	—
	144	0.8 mm, perimeter	13 × 13	1.51 mm	—		—	—	—	—
	160	0.8 mm, perimeter	13 × 13	1.51 mm					—	—
	208	0.8 mm, perimeter	15 × 15	1.51 mm						—
	240	0.8 mm, perimeter	19 × 19	1.51 mm						
	304	0.8 mm, perimeter	19 × 19	1.51 mm				○	○	
PBGA	256	1.27 mm, perimeter	27 × 27	2.13 mm						—
	313	1.27 mm, staggered	35 × 35	2.33 mm					—	—
	352	1.27 mm, perimeter	35 × 35	2.33 mm						

Remarks 1. ○: Already shifted, Blank: Under study, —: Cannot be used
 2. μ PD653xx: 3-layer product, μ PD655xx: 4-layer product

List of Packages

Dual power supply

(3/4)

Package	Number of Pins	Lead Pitch	Body Size (mm)	Body Thickness	μ PD65361 μ PD65561	μ PD65362 μ PD65562	μ PD65363 μ PD65563	μ PD65364 μ PD65564	μ PD65365 μ PD65565	μ PD65366 μ PD65566
TQFP	64	0.5 mm	10 × 10	1.00 mm	○	—	—	—	—	—
	80	0.5 mm	12 × 12	1.00 mm		—	—	—	—	—
	100	0.5 mm	14 × 14	1.00 mm				—	—	—
	120	0.4 mm	14 × 14	1.00 mm	—			—	—	—
LQFP	100	0.5 mm	14 × 14	1.40 mm			○	—	—	—
	144	0.5 mm	20 × 20	1.40 mm	—	—		—	—	—
TBGA ^{Note}	256	1.27 mm, perimeter	27 × 27	1.40 mm	—	—	—			
	352	1.27 mm, perimeter	35 × 35	1.40 mm	—	—	—	—	—	
	420	1.27 mm, perimeter	35 × 35	1.40 mm	—	—	—	—	—	—
	500	1.27 mm, perimeter	40 × 40	1.40 mm	—	—	—	—	—	—
	576	1.27 mm, perimeter	40 × 40	1.40 mm	—	—	—	—	—	—

Note With heat spreader

- Remarks**
- : Already shifted, Blank: Under study, —: Cannot be used
 - μ PD653xx: 3-layer product, μ PD655xx: 4-layer product

Dual power supply

(4/4)

Package	Number of Pins	Lead Pitch	Body Size (mm)	Body Thickness	μ PD65367 μ PD65567	μ PD65368 μ PD65568	μ PD65369 μ PD65569	μ PD65370 μ PD65570	μ PD65371 μ PD65571
TQFP	64	0.5 mm	10 × 10	1.00 mm	—	—	—	—	—
	80	0.5 mm	12 × 12	1.00 mm	—	—	—	—	—
	100	0.5 mm	14 × 14	1.00 mm	—	—	—	—	—
	120	0.4 mm	14 × 14	1.00 mm	—	—	—	—	—
LQFP	100	0.5 mm	14 × 14	1.40 mm	—	—	—	—	—
	144	0.5 mm	20 × 20	1.40 mm	—	—	—	—	—
TBGA ^{Note}	256	1.27 mm, perimeter	27 × 27	1.40 mm					
	352	1.27 mm, perimeter	35 × 35	1.40 mm	○	○		○	○
	420	1.27 mm, perimeter	35 × 35	1.40 mm	○				
	500	1.27 mm, perimeter	40 × 40	1.40 mm	—	○	○	○	○
	576	1.27 mm, perimeter	40 × 40	1.40 mm	—	—	○		

Note With heat spreader

- Remarks**
- : Already shifted, Blank: Under study, —: Cannot be used
 - μ PD653xx: 3-layer product, μ PD655xx: 4-layer product

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Internal 1.8 V

Parameter	Symbol	Conditions	Ratings	Unit
Power supply voltage	V_{DD}	1.8 V	−0.5 to +2.5	V
		3.3 V	−0.5 to +4.6	V
I/O voltage	V_I/V_O			
1.8 V input buffer		$V_I/V_O < V_{DD} + 0.15 \text{ V}$	−0.5 to +2.5	V
3.3 V input buffer		$V_I/V_O < V_{DD} + 0.5 \text{ V}$	−0.5 to +4.6	V
Output current	I_O			
$I_{OL} = 3.0 \text{ mA}$			10	mA
$I_{OL} = 6.0 \text{ mA}$			20	mA
$I_{OL} = 9.0 \text{ mA}$			30	mA
$I_{OL} = 12.0 \text{ mA}$			40	mA
Operating ambient temperature	T_A		−40 to +85	°C
Storage temperature	T_{stg}		−65 to +150	°C

Internal 2.5 V

Parameter	Symbol	Conditions	Ratings	Unit
Power supply voltage	V_{DD}	2.5 V	−0.5 to +3.6	V
		3.3 V	−0.5 to +4.6	V
I/O voltage	V_I/V_O			
2.5 V input buffer		$V_I/V_O < V_{DD} + 0.3 \text{ V}$	−0.5 to +3.6	V
3.3 V input buffer		$V_I/V_O < V_{DD} + 0.5 \text{ V}$	−0.5 to +4.6	V
Output current	I_O			
$I_{OL} = 3.0 \text{ mA}$			10	mA
$I_{OL} = 6.0 \text{ mA}$			20	mA
$I_{OL} = 9.0 \text{ mA}$			30	mA
$I_{OL} = 12.0 \text{ mA}$			40	mA
$I_{OL} = 18.0 \text{ mA}$			55	mA
$I_{OL} = 24.0 \text{ mA}$			70	mA
Operating ambient temperature	T_A		−40 to +85	°C
Storage temperature	T_{stg}		−65 to +150	°C

Caution Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

Remark Except for buffers with the fail-safe function, 1.8 V, 2.5 V or 3.3 V must be applied to the I/O pins only after applying the power supply voltage.

Recommended Operating Range

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Power supply voltage	V_{DD}	1.8 V	1.65	1.8	1.95	V
		2.5 V	2.3	2.5	2.7	V
		3.3 V	3.0	3.3	3.6	V
High-level input voltage	V_{IH}	1.8 V input buffer	$0.65V_{DD}$		V_{DD}	V
Low-level input voltage	V_{IL}		0		$0.35V_{DD}$	V
Positive trigger voltage	V_P		Schmitt input		1.5	V
Negative trigger voltage	V_N				1.1	V
Hysteresis voltage	V_H				0.6	V
High-level input voltage	V_{IH}	2.5 V input buffer	1.7		V_{DD}	V
Low-level input voltage	V_{IL}		0		0.7	V
Positive trigger voltage	V_P		Schmitt input		1.7	V
Negative trigger voltage	V_N				1.4	V
Hysteresis voltage	V_H				0.6	V
High-level input voltage	V_{IH}	3.3 V input buffer	$0.5V_{DD}$		V_{DD}	V
Low-level input voltage	V_{IL}		0		$0.3V_{DD}$	V
Positive trigger voltage	V_P		Schmitt input		2.4	V
Negative trigger voltage	V_N				1.8	V
Hysteresis voltage	V_H				1.0	V
Input rise time	t_{ri}	Normal input	0		200	ns
Input fall time	t_{fi}		0		200	ns
Input rise time	t_{ri}	Schmitt input	0		10	ms
Input fall time	t_{fi}		0		10	ms

Remark When a separate parameter is not provided for internal 2.5 V, the value is the same as internal 1.8 V.

DC Characteristics

(1/4)

	Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Static current consumption ^{Note} Internal 1.8 V	μ PD65301, μ PD65341, μ PD65501, μ PD65541	I_{DD5}	$V_I = V_{DD}$ or GND			180	μ A
	μ PD65321, μ PD65361, μ PD65521, μ PD65561						
	μ PD65302, μ PD65342, μ PD65502, μ PD65542						
	μ PD65322, μ PD65362, μ PD65522, μ PD65562						
	μ PD65303, μ PD65343, μ PD65503, μ PD65543	I_{DD5}	$V_I = V_{DD}$ or GND			210	μ A
	μ PD65323, μ PD65363, μ PD65523, μ PD65563						
	μ PD65304, μ PD65344, μ PD65504, μ PD65544	I_{DD5}	$V_I = V_{DD}$ or GND			270	μ A
	μ PD65324, μ PD65364, μ PD65524, μ PD65564						
	μ PD65305, μ PD65345, μ PD65505, μ PD65545	I_{DD5}	$V_I = V_{DD}$ or GND			330	μ A
	μ PD65325, μ PD65365, μ PD65525, μ PD65565						
	μ PD65306, μ PD65346, μ PD65506, μ PD65546						
	μ PD65326, μ PD65366, μ PD65526, μ PD65566						
	μ PD65307, μ PD65347, μ PD65507, μ PD65547	I_{DD5}	$V_I = V_{DD}$ or GND			420	μ A
	μ PD65327, μ PD65367, μ PD65527, μ PD65567						
	μ PD65308, μ PD65348, μ PD65508, μ PD65548	I_{DD5}	$V_I = V_{DD}$ or GND			540	μ A
	μ PD65328, μ PD65368, μ PD65528, μ PD65568						
	μ PD65309, μ PD65349, μ PD65509, μ PD65549	I_{DD5}	$V_I = V_{DD}$ or GND			660	μ A
	μ PD65329, μ PD65369, μ PD65529, μ PD65569						
	μ PD65310, μ PD65350, μ PD65510, μ PD65550	I_{DD5}	$V_I = V_{DD}$ or GND			750	μ A
	μ PD65330, μ PD65370, μ PD65530, μ PD65570						
	μ PD65311, μ PD65351, μ PD65511, μ PD65551	I_{DD5}	$V_I = V_{DD}$ or GND			870	μ A
	μ PD65331, μ PD65371, μ PD65531, μ PD65571						

Note When using I/O blocks (etc.) with pull-up/pull-down resistors incorporated, the static current consumption increases.

Remark The + and – signs of the current values in the table indicate the direction of the current. Current flowing into a device is indicated by +; current flowing out is indicated by –.

DC Characteristics

(2/4)

	Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Static current consumption ^{Note} Internal 2.5 V	μ PD65301, μ PD65341, μ PD65501, μ PD65541	I_{DD5}	$V_I = V_{DD}$ or GND			180	μ A
	μ PD65321, μ PD65361, μ PD65521, μ PD65561						
	μ PD65302, μ PD65342, μ PD65502, μ PD65542						
	μ PD65322, μ PD65362, μ PD65522, μ PD65562						
	μ PD65303, μ PD65343, μ PD65503, μ PD65543	I_{DD5}	$V_I = V_{DD}$ or GND			240	μ A
	μ PD65323, μ PD65363, μ PD65523, μ PD65563						
	μ PD65304, μ PD65344, μ PD65504, μ PD65544	I_{DD5}	$V_I = V_{DD}$ or GND			300	μ A
	μ PD65324, μ PD65364, μ PD65524, μ PD65564						
	μ PD65305, μ PD65345, μ PD65505, μ PD65545	I_{DD5}	$V_I = V_{DD}$ or GND			360	μ A
	μ PD65325, μ PD65365, μ PD65525, μ PD65565						
	μ PD65306, μ PD65346, μ PD65506, μ PD65546						
	μ PD65326, μ PD65366, μ PD65526, μ PD65566						
	μ PD65307, μ PD65347, μ PD65507, μ PD65547	I_{DD5}	$V_I = V_{DD}$ or GND			480	μ A
	μ PD65327, μ PD65367, μ PD65527, μ PD65567						
	μ PD65308, μ PD65348, μ PD65508, μ PD65548	I_{DD5}	$V_I = V_{DD}$ or GND			600	μ A
	μ PD65328, μ PD65368, μ PD65528, μ PD65568						
	μ PD65309, μ PD65349, μ PD65509, μ PD65549	I_{DD5}	$V_I = V_{DD}$ or GND			750	μ A
	μ PD65329, μ PD65369, μ PD65529, μ PD65569						
	μ PD65310, μ PD65350, μ PD65510, μ PD65550	I_{DD5}	$V_I = V_{DD}$ or GND			870	μ A
	μ PD65330, μ PD65370, μ PD65530, μ PD65570						
	μ PD65311, μ PD65351, μ PD65511, μ PD65551	I_{DD5}	$V_I = V_{DD}$ or GND			1020	μ A
	μ PD65331, μ PD65371, μ PD65531, μ PD65571						

Note When using I/O blocks (etc.) with pull-up/pull-down resistors incorporated, the static current consumption increases.

Remark The + and – signs of the current values in the table indicate the direction of the current. Current flowing into a device is indicated by +; current flowing out is indicated by –.

DC Characteristics

(3/4)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
OFF-state output current	1.8 V output		I _{oz}	V _O = V _{DD} or GND			±10	μ A
	2.5 V output		I _{oz}	V _O = V _{DD} or GND			±10	μ A
	3.3 V output		I _{oz}	V _O = V _{DD} or GND			±10	μ A
Output short-circuit current ^{Note 1}			I _{os}	V _O = GND			−250	mA
Input leakage current 1.8 V buffer	Normal input		I _I	V _I = V _{DD} or GND			±10	μ A
	With pull-up resistor (100 kΩ)		I _I	V _I = GND	−5	−18	−49	μ A
	With pull-up resistor (5 kΩ)		I _I	V _I = GND	−107	−333	−900	μ A
	With pull-down resistor (100 kΩ)		I _I	V _I = V _{DD}	5	22	39	μ A
Input leakage current 2.5 V buffer	Normal input		I _I	V _I = V _{DD} or GND			±10	μ A
	With pull-up resistor (100 kΩ)		I _I	V _I = GND	−8	−22	−56	μ A
	With pull-up resistor (5 kΩ)		I _I	V _I = GND	−175	−475	−1174	μ A
	With pull-down resistor (100 kΩ)		I _I	V _I = V _{DD}	7	22	62	μ A
Input leakage current 3.3 V buffer	Normal input		I _I	V _I = V _{DD} or GND			±10	μ A
	With pull-up resistor (100 kΩ)		I _I	V _I = GND	−14	−41	−58	μ A
	With pull-up resistor (5 kΩ)		I _I	V _I = GND	−240	−702	−984	μ A
	With pull-down resistor (100 kΩ)		I _I	V _I = V _{DD}	12	34	46	μ A
Pull-up resistor ^{Note 2}	1.8 V buffer	100 kΩ	R _{PU}	V _I = GND	40	102	292	kΩ
		5 kΩ	R _{PU}	V _I = GND	2	5	16	kΩ
	2.5 V buffer	100 kΩ	R _{PU}	V _I = GND	49	111	279	kΩ
		5 kΩ	R _{PU}	V _I = GND	2	5	14	kΩ
	3.3 V buffer	100 kΩ	R _{PU}	V _I = GND	33	81	221	kΩ
		5 kΩ	R _{PU}	V _I = GND	2	5	13	kΩ
Pull-down resistor ^{Note 2}	1.8 V buffer 100 kΩ		R _{PD}	V _I = V _{DD}	51	122	319	kΩ
	2.5 V buffer 100 kΩ		R _{PD}	V _I = V _{DD}	43	113	297	kΩ
	3.3 V buffer 100 kΩ		R _{PD}	V _I = V _{DD}	42	97	240	kΩ

Notes 1. The output short-circuit time is 1 second or less per pin of the LSI.

2. The pull-up and pull-down resistances vary depending on the input and output voltages.

Remarks 1. The + and − signs of the current values in the table indicate the direction of the current. Current flowing into a device is indicated by +; current flowing out is indicated by −.

2. When a separate parameter is not provided for internal 2.5 V, the value is the same as internal 1.8 V.

DC Characteristics

(4/4)

	Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Low-level output current ^{Note}	1.8 V buffer	3.0 mA type	I _{OL}	V _{OL} = 0.4 V	3			mA
		6.0 mA type	I _{OL}	V _{OL} = 0.4 V	6			mA
		9.0 mA type	I _{OL}	V _{OL} = 0.4 V	9			mA
		12.0 mA type	I _{OL}	V _{OL} = 0.4 V	12			mA
	2.5 V buffer	3.0 mA type	I _{OL}	V _{OL} = 0.4 V	3			mA
		6.0 mA type	I _{OL}	V _{OL} = 0.4 V	6			mA
		9.0 mA type	I _{OL}	V _{OL} = 0.4 V	9			mA
		12.0 mA type	I _{OL}	V _{OL} = 0.4 V	12			mA
		18.0 mA type	I _{OL}	V _{OL} = 0.4 V	18			mA
		24.0 mA type	I _{OL}	V _{OL} = 0.4 V	24			mA
	3.3 V buffer	3.0 mA type	I _{OL}	V _{OL} = 0.4 V	3			mA
		6.0 mA type	I _{OL}	V _{OL} = 0.4 V	6			mA
		9.0 mA type	I _{OL}	V _{OL} = 0.4 V	9			mA
		12.0 mA type	I _{OL}	V _{OL} = 0.4 V	12			mA
High-level output current ^{Note}	1.8 V buffer	3.0 mA type	I _{OH}	V _{OH} = 1.4 V	−3			mA
		6.0 mA type	I _{OH}	V _{OH} = 1.4 V	−6			mA
		9.0 mA type	I _{OH}	V _{OH} = 1.4 V	−9			mA
		12.0 mA type	I _{OH}	V _{OH} = 1.4 V	−12			mA
	2.5 V buffer	3.0 mA type	I _{OH}	V _{OH} = 1.4 V	−3			mA
		6.0 mA type	I _{OH}	V _{OH} = 1.4 V	−6			mA
		9.0 mA type	I _{OH}	V _{OH} = 1.4 V	−9			mA
		12.0 mA type	I _{OH}	V _{OH} = 1.4 V	−12			mA
		18.0 mA type	I _{OH}	V _{OH} = 1.4 V	−18			mA
		24.0 mA type	I _{OH}	V _{OH} = 1.4 V	−24			mA
	3.3 V buffer	3.0 mA type	I _{OH}	V _{OH} = 2.6 V	−3			mA
		6.0 mA type	I _{OH}	V _{OH} = 2.6 V	−6			mA
		9.0 mA type	I _{OH}	V _{OH} = 2.6 V	−9			mA
		12.0 mA type	I _{OH}	V _{OH} = 2.6 V	−12			mA
Low-level output voltage	1.8 V buffer		V _{OL}	I _{OL} = 0 mA			0.1	V
	2.5 V buffer		V _{OL}	I _{OL} = 0 mA			0.1	V
	3.3 V buffer		V _{OL}	I _{OL} = 0 mA			0.1	V
High-level output voltage	1.8 V buffer		V _{OH}	I _{OH} = 0 mA	V _{DD} −0.1			V
	2.5 V buffer		V _{OH}	I _{OH} = 0 mA	V _{DD} −0.1			V
	3.3 V buffer		V _{OH}	I _{OH} = 0 mA	V _{DD} −0.1			V

Note All the buffers with the same output drive capability have the same specifications.

Remarks 1. The + and − signs of the current values in the table indicate the direction of the current. Current flowing into a device is indicated by +; current flowing out is indicated by −.

2. When a separate parameter is not provided for internal 2.5 V, the value is the same as internal 1.8 V.

AC Characteristics

The values in the table below refer to when the supply voltage of the internal gate array block is 1.8 ± 0.15 V.

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Maximum toggle frequency	f_{tog}	Internal toggle F/F (fan-out = 2)	436			MHz
Maximum operating frequency	f_{MAX}				66 ^{Note}	MHz
Propagation delay time	t_{PD}	Internal gate				
		Fan-out = 1, wiring length = 0 mm		129		ps
		Fan-out = 1, standard wiring length		163		ps
		Standard load		146		ps
		Internal gate (power gate)				
		Fan-out = 1, standard wiring length		139		ps
		Standard load		126		ps
		1.8 V input buffer				
		Fan-out = 1, standard wiring length		243		ps
		Standard load		239		ps
Output rise time	t_r	3.3 V input buffer				
		Fan-out = 1, standard wiring length		352		ps
		Standard load		342		ps
		1.8 V output buffer (FO0111)				
Output fall time	t_f	$C_L = 15$ pF, $I_{OL} = 9$ mA		1289		ps
		3.3 V output buffer (FO0113)				
		$C_L = 15$ pF, $I_{OL} = 9$ mA		1556		ps
		1.8 V output buffer (FO0111)				
Output rise time	t_r	$C_L = 15$ pF, $I_{OL} = 9$ mA		1415		ps
		3.3 V output buffer (FO0113)				
		$C_L = 15$ pF, $I_{OL} = 9$ mA		1123		ps
		1.8 V output buffer (FO0111)				
Output fall time	t_f	$C_L = 15$ pF, $I_{OL} = 9$ mA		1526		ps
		3.3 V output buffer (FO0113)				
		$C_L = 15$ pF, $I_{OL} = 9$ mA		1114		ps
		1.8 V output buffer (FO0111)				

Note Contact NEC Electronics if this value is exceeded.

Remark Standard load : Fan-out = 2, wiring length = 0 mm
Standard wiring length : 145 μm /1 pin-pair

AC Characteristics

The values in the table below refer to when the supply voltage of the internal gate array block is 2.5 ± 0.2 V.

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Maximum toggle frequency	f_{tog}	Internal toggle F/F (fan-out = 2)	826			MHz
Maximum operating frequency	f_{MAX}				133 ^{Note}	MHz
Propagation delay time	t_{PD}	Internal gate				
		Fan-out = 1, wiring length = 0 mm		85		ps
		Fan-out = 1, standard wiring length		113		ps
		Standard load		99		ps
		Internal gate (power gate)				
		Fan-out = 1, standard wiring length		91		ps
		Standard load		83		ps
		2.5 V input buffer				
		Fan-out = 1, standard wiring length		173		ps
		Standard load		169		ps
Output rise time	t_r	3.3 V input buffer				
		Fan-out = 1, standard wiring length		294		ps
		Standard load		289		ps
		2.5 V output buffer (FO0122)				
Output fall time	t_f	$C_L = 15$ pF, $I_{OL} = 9$ mA		905		ps
		3.3 V output buffer (FO0123)				
		$C_L = 15$ pF, $I_{OL} = 9$ mA		1224		ps
		2.5 V output buffer (FO0122)				
Output rise time	t_r	$C_L = 15$ pF, $I_{OL} = 9$ mA		1359		ps
		3.3 V output buffer (FO0123)				
		$C_L = 15$ pF, $I_{OL} = 9$ mA		1059		ps
		2.5 V output buffer (FO0122)				
Output fall time	t_f	$C_L = 15$ pF, $I_{OL} = 9$ mA		1441		ps
		3.3 V output buffer (FO0123)				
		$C_L = 15$ pF, $I_{OL} = 9$ mA		983		ps
		2.5 V output buffer (FO0122)				

Note Contact NEC Electronics if this value is exceeded.

Remark Standard load : Fan-out = 2, wiring length = 0 mm
Standard wiring length : 145 μ m/1 pin-pair

DEVELOPMENT TOOLS

Easy interface with your EWS or PC

Users can choose the following tools to their environment.

Caution Some functions may not be supported. Make it sure before use.

OPENCAD™ Configuration Tool

Function	NEC Tool	Interface Data	Commercially Available Tool Interface
Function simulator	—	• Netlist PWC/EDIF(2.0.0)/ Verilog™ HDL	ModelSim™/Verilog-XL™/ NC-Verilog™/VCS™
Schematic editor	Vdraw	• Test pattern ALBA	—
Logic synthesis	—		Design Compiler®
Gate level simulator ^{Note 1}	V.sim	• Delay information file	ModelSim/Verilog-XL/NC-Verilog/ VCS
Formal verifier	—		Formality®/Tuxedo™-LEC/ Conformal™-LEC
STA ^{Note 1}	Tiara	• Constraints file	PrimeTime®
Fault simulator ^{Note 2}	C.FGRADE		—
Design for test	NEC_SCAN2/ NEC_BSCAN2/ NEC_BIST/TESTBUS		DFTCompiler/TetraMAX®
Floor planner ^{Note 3}	CBIC : ace_floorplan GA : Galet		—
Placement and Routing ^{Note 3}	Galet		Silicon Ensemble™

Notes 1. Sign-off tool

2. Tool not supported in the HP™ version

3. Stand-alone tool

Remark Platform : SUN™(Solaris™)/HP(HP-UX™)

GUI : X11R5/Motif™ 1.2

OPENCAD and FPBGA are trademarks of NEC Electronics Corporation.

Design Compiler is a registered trademark of Synopsys, Inc. in Japan.

PrimeTime, TetraMAX and Formality are registered trademarks of Synopsys, Inc. in the United States.

VCS is a trademark of Synopsys, Inc.

Silicon Ensemble, NC-Verilog, Verilog, and Verilog-XL are trademarks of Cadence Design Systems, Inc.

ModelSim is a trademark of Model Technology, Inc.

Tuxedo and Conformal are trademarks of Verplex Systems, Inc.

SUN and Solaris are trademarks of SUN Microsystems, Inc.

HP and HP-UX are trademarks of Hewlett-Packard Co.

Motif is a trademark of Open Software Foundation, Inc. (OSF).

These commodities, technology or software, must be exported in accordance with the export administration regulations of the exporting country.
Diversion contrary to the law of that country is prohibited.

• **The information in this document is current as of June, 2003. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.**

- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

*For further information,
please contact:*

NEC Electronics Corporation

1753, Shimonumabe, Nakahara-ku,
Kawasaki, Kanagawa 211-8668,
Japan
Tel: 044-435-5111
<http://www.necel.com/>

[North America]

NEC Electronics America, Inc.

2880 Scott Blvd.
Santa Clara, CA 95050-2554, U.S.A.
Tel: 408-588-6000
800-366-9782
<http://www.necelam.com/>

[Europe]

NEC Electronics (Europe) GmbH

Oberrather Str. 4
40472 Düsseldorf, Germany
Tel: 0211-6503-01
<http://www.ee.nec.de/>

Sucursal en España

Juan Esplandiú, 15
28007 Madrid, Spain
Tel: 091-504-2787

Succursale Française

9, rue Paul Dautier, B.P. 52
78142 Velizy-Villacoublay Cédex
France
Tel: 01-3067-5800

Filiale Italiana

Via Fabio Filzi, 25/A
20124 Milano, Italy
Tel: 02-667541

Branch The Netherlands

Boschdijk 187a
5612 HB Eindhoven
The Netherlands
Tel: 040-2445845

Tyskland Filial

P.O. Box 134
18322 Taeby, Sweden
Tel: 08-6380820

United Kingdom Branch

Cygnus House, Sunrise Parkway
Linford Wood, Milton Keynes
MK14 6NP, U.K.
Tel: 01908-691-133

[Asia & Oceania]

NEC Electronics Hong Kong Limited

12/F., Cityplaza 4,
12 Taikoo Wan Road, Hong Kong
Tel: 2886-9318

Seoul Branch

11F., Samik Lavied'or Bldg., 720-2,
Yeoksam-Dong, Kangnam-Ku,
Seoul, 135-080, Korea
Tel: 02-558-3737

NEC Electronics Shanghai, Ltd.

7th Floor, HSBC Tower, 101 Yin Cheng East Road,
Pudong New Area, Shanghai P.R. China P.C:200120
Tel: 021-6841-1138

NEC Electronics Taiwan Ltd.

7F, No. 363 Fu Shing North Road
Taipei, Taiwan, R. O. C.
Tel: 02-2719-2377

NEC Electronics Singapore Pte. Ltd.

238A Thomson Road,
#12-08 Novena Square,
Singapore 307684
Tel: 6253-8311