

Part* Number	DESC Drawing Number	Relay Description
CD00CFW CD00CFY	90091-008	Basic Solid State Relay (SSR)
CD01CFW CD01CFY	90091-006	SSR with Control Status
CD20CDW CD20CDY	90091-004	SSR with Short Circuit Protection
CD21CDW CD21CDY	90091-002	SSR with Short Circuit Protection and Control Status

* The Y suffix denotes parameters tested to MIL-R-28750 specifications.
The W suffix denotes parameters tested to Teledyne specifications.

ELECTRICAL SPECIFICATIONS

(-55°C TO +105°C UNLESS OTHERWISE NOTED)

INPUT (CONTROL) SPECIFICATION

When used in 2 terminal configuration
(TTL or direct control) (See Fig. 1)

	Min	Typ	Max	Units
Input Current @ $V_{IN} = 5 \text{ Vdc}$ (See Fig. 2)		14	15	mA _{dc}
Turn-Off Voltage (Guaranteed Off)			1.5	V _{dc}
Turn-On Voltage (Guaranteed On)	3.8			V _{dc}
Reverse Voltage Protection			-32	V _{dc}
Input Supply Range (See Note 4)	3.8		32	V _{dc}

INPUT (CONTROL) SPECIFICATION

When used in 3 terminal configuration
(CMOS or open collector TTL) (See Fig. 1)

	Min	Typ	Max	Units
Control Current			250	μA _{dc}
			1	mA _{dc}
Control Voltage Range	0		18	V _{dc}
Bias Supply Voltage (See Note 4)	3.8		32	V _{dc}
Bias Supply Current @ $V_{BIAS} = 5 \text{ Vdc}$		14	15	mA _{dc}
Turn-Off Voltage (Guaranteed Off)	3.2			V _{dc}
Turn-On Voltage (Guaranteed On)			0.3	V _{dc}

FEATURES

- Available with short circuit/current overload protection
- Available with input status monitor
- TTL and CMOS compatible control
- Low ON resistance power FET output
- Fast switching speed
- Meets 28 Vdc system requirements of MIL-STD-704
- Optical isolation
- Low profile hermetic ceramic package
- Built and tested to the requirements of MIL-R-28750

DESCRIPTION

This all solid state relay utilizes the latest technology to provide a low ON resistance. The control (input) and load (output) are optically isolated to protect input logic circuits from voltage and current transients which can occur on the output supply. The optical isolation also provides a full floating output, thus allowing the load to be connected to either output terminal. The control circuit is buffered to enable the relay to be driven directly from standard CMOS or open collector TTL logic circuits. Available options include short circuit and current overload protection, which provides complete protection for both the relay and the system wiring. This feature not only provides protection should a short or overload occur while the relay is on, but will also provide protection should the relay be switched into a short. In either case, the relay will sense the short circuit condition and then block it indefinitely until the short is removed and the unit is reset by cycling the input control. The second option is a status output, which provides a built-in-test function. This feature checks the input circuitry of the relay and provides a logic (0) low when the input circuit is turned on and operational. Both options are available either together or separately as standard features.

DC



OUTPUT (LOAD) SPECIFICATIONS

(See Note 2)


		Min	Typ	Max	Units
Continuous Load Current (See Fig. 3)	CD20CD			1.0	A _{dc}
	CD21CD				
	CD00CF			2.0	
	CD01CF				
Leakage Current @ V _{LOAD} = 60 Vdc					40 μA _{dc}
Output Voltage Drop	CD20CD			0.6	V _{dc}
	CD21CD				
	CD00CF			0.75	
	CD01CF				
Continuous Operating Load Voltage					60 V _{dc}
Transient Blocking Voltage (See Note 3)					80 V _{dc}
ON Resistance R _{ds} (on) at T _J = 25°C I _L = 100 mA _{dc} (See Fig. 4)	CD20CD		0.36	0.45	Ohm
	CD21CD				
	CD00CF		0.16	0.22	
	CD01CF				
Turn-On Time (See Fig. 5)					1.5 ms
Turn-Off Time (See Fig. 5)					0.25 ms
Electrical System Spike					±600 V _{dc}
Output Capacitance at 25 V _{dc} , 100 KHz					475 pF
Input to Output Capacitance					10 pF
Dielectric Strength			1000		V _{ac}
Insulation Resistance @ 500 V _{dc}			10 ⁹		Ohms
Maximum Junction Temperature (T _J Max)					150 °C
Thermal Resistance Junction to Ambient (θ _{JA})					80 °C/W
Thermal Resistance Junction to Case (θ _{JC})					20 °C/W

STATUS OUTPUT SPECIFICATIONS
(CD01CF AND CD21CD)


	Min	Typ	Max	Units
Status Supply Voltage (See Note 7)			30	V _{dc}
Status Leakage Current @ 15 V _{dc}			4	μA _{dc}
Status (sink) Current (V _{SO} < 0.3 V _{dc})			2	mA _{dc}

BLOCK DIAGRAM
(BOTTOM VIEW)

MECHANICAL SPECIFICATIONS

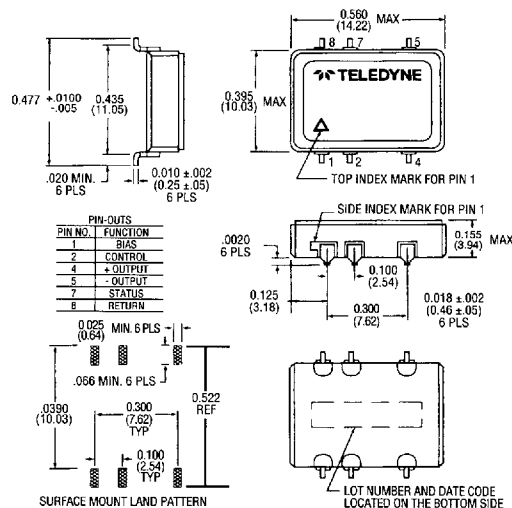

SCD SERIES OUTLINE

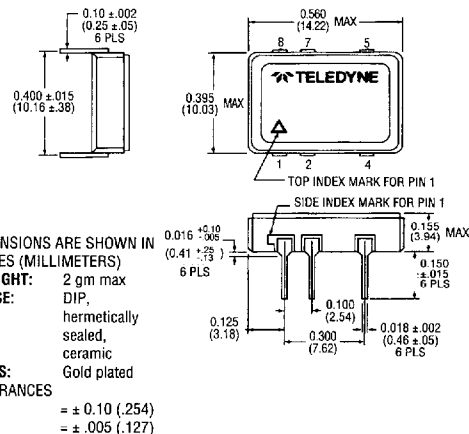

DIMENSIONS ARE SHOWN IN INCHES (MILLIMETERS)


• WEIGHT: 2 gm max

• CASE: DIP, hermetically sealed, ceramic, Gold plated


• PINS: TOLERANCES
XX = ± 0.10 (.254)
XXX = ± 0.005 (.127)

CD SERIES OUTLINE


SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

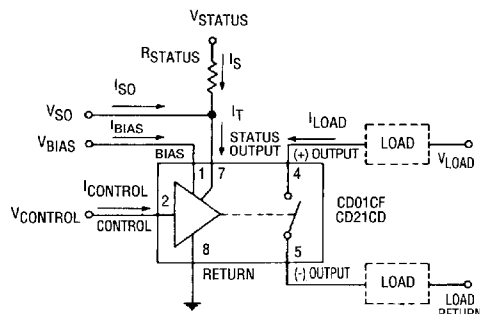


(A) 3 TERMINAL INPUT WITH STATUS
(See Note 7)

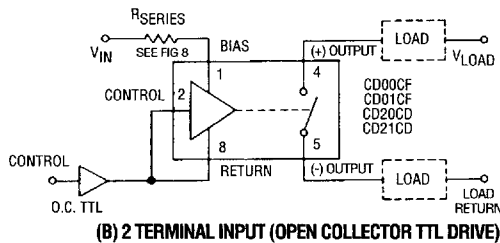

(B) 2 TERMINAL INPUT (OPEN COLLECTOR TTL DRIVE)

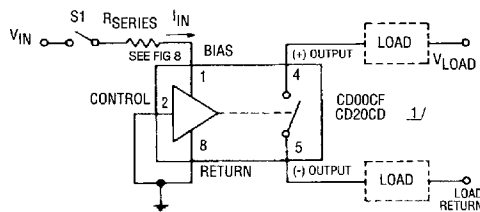

(C) 2 TERMINAL INPUT (DIRECT DRIVE)

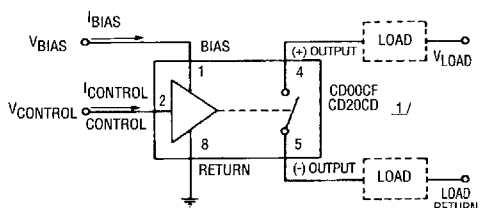

(D) 3 TERMINAL INPUT WITHOUT STATUS

1/ CD21CD and CD01CF MAY BE WIRED WITHOUT THE STATUS LINE AS SHOWN IN (C) AND (D)

WIRING CONFIGURATIONS
FIGURE 1 (See Note 8)

SHORT CIRCUIT PROTECTION SPECIFICATIONS (CD20CD AND CD21CD)


	Min	Typ	Max	Units
Surge Current (See Fig. 7 and Note 6)		2.4		Adc

ENVIRONMENTAL SPECIFICATIONS


Temperature	Operating	-55°C to +105°C
Range	Storage	-55°C to +125°C
Vibration		100 g, 10 to 3000 Hz
Constant Acceleration		5000 g
Shock		1500 g, 0.5 ms pulse

TABLE 1: STATUS OUTPUT TRUTH TABLE
(CD01CF and CD21CD)

Control Voltage	Status Output Level
High	High ($V_{SO} = V_{STATUS}$)
Low	Low ($V_{SO} \leq 0.3 \text{ Vdc}$)

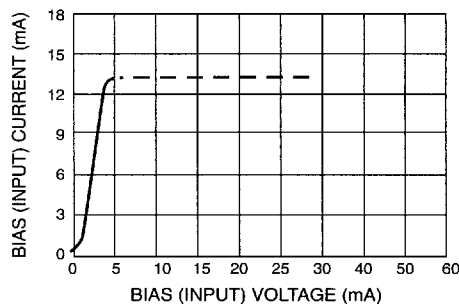


INPUT CURRENT VS VOLTAGE
FIGURE 2 (See Note 4)

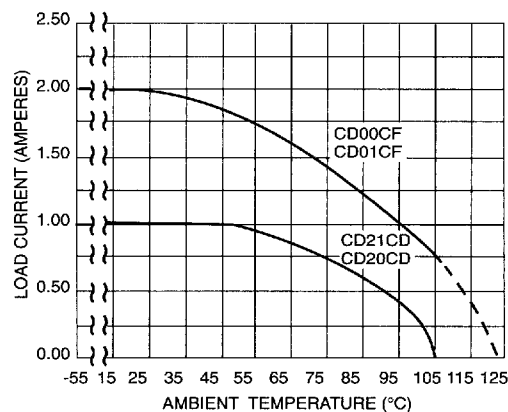


LOAD CURRENT DERATING CURVE
FIGURE 3


DC

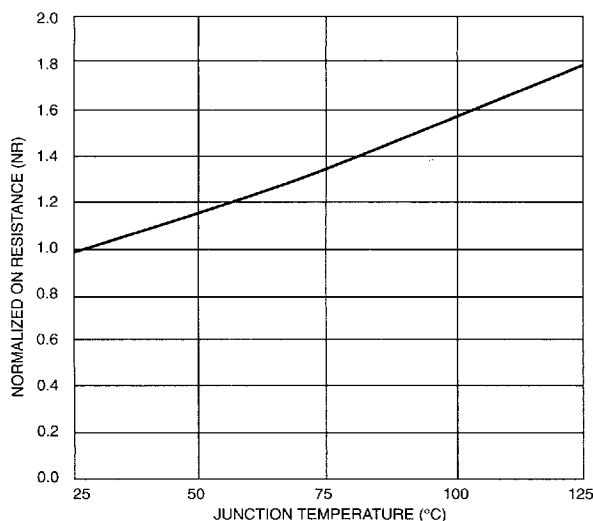


NORMALIZED ON RESISTANCE VS JUNCTION TEMPERATURE
FIGURE 4 (See Note 5)

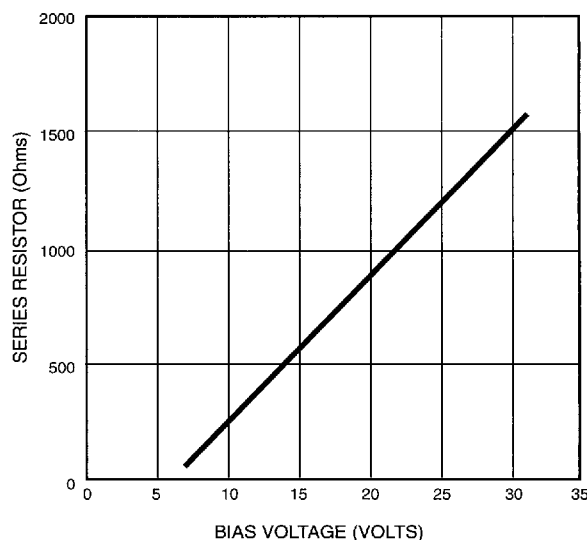

SERIES LIMIT BIAS RESISTOR VS BIAS VOLTAGE
FIGURE 8 (See Note 4)

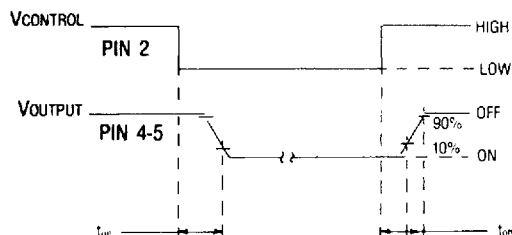

OUTPUT TURN-ON AND TURN-OFF TIMING
FIGURE 5

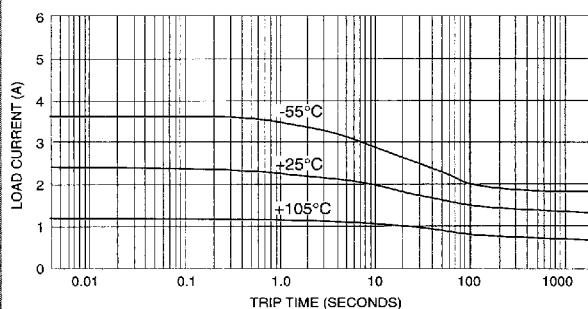

TRIP CURRENT VS TIME

NOTES:

- Control input is compatible with CMOS or open collector TTL (with pull up resistor).
- The rated input voltage is 5V for all tests unless otherwise specified.
- Transient blocking voltage tests are performed per MIL-STD-704 (28 Vdc systems).
- For bias voltages above 6V, a series resistor is required. Use the standard resistor value equal to or less than the value found from Figure 8.
- To calculate the maximum ON resistance for a given junction temperature, find the normalized ON resistance factor (NR) from Figure 4. Calculate the new ON resistance as follows:
 (CD00CD, CD01CD) $R_{(ON)} = NR \cdot R_{ON} @ 25^{\circ}C$
 (CD20CD, CD21CD) $R_{(ON)} = 0.2 \cdot NR + 0.21$
- Overload testing to the requirements of MIL-R-28750 is constrained to the limits imposed by the short circuit protection characteristics as defined in this specification. System series inductance for "shorted-load" mode of operation should be 30 μH maximum. Maximum repetition rate into a shorted load should not exceed 10 Hz.
- A status pull up resistor is required for proper operation of the status output. Determine the current (I_{SO}) required by the status interface. Calculate the current (I_S) through the status resistor such that the sink current through the status output is 2 mA. Select the status resistor such that it does not allow more than 2 mA to flow through the status output.

$$R_{STATUS} = \frac{V_{STATUS} - 0.3V}{2 \text{ mA} - I_{SO}}$$

- Inductive loads should be diode suppressed. Input transitions should be ≤ 1 ms duration and the input drive should be a bounceless contact type.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE