

INTEGRATED CIRCUIT POWER DRIVERS

MEDIUM-CURRENT SOURCE DRIVERS

ALL DEVICES

- Internal Transient-Suppression Diodes
- TTL, CMOS, PMOS, NMOS Compatible

UDN-2580EP and UDN-2580LW

- – 500 mA, 50 V Darlington Outputs
- Active Low Inputs

UDN-2585EP and UDN-2585LW

- – 250 mA, 35 V Saturated Outputs
- Active High Inputs


UDN-2982EP and UDN-2982LW

- – 500 mA, 50 V Darlington Outputs
- Active High Inputs
- Extended-Temperature, Hermetically Sealed Version to MIL-STD-883 is UDS-2982EK

UDN-2984EP and UDN-2984LW


- – 500 mA, 80 V Darlington Outputs
- Extended-Temperature, Hermetically Sealed Version to MIL-STD-883 is UDS-2984EK

UDN-2580/85LW

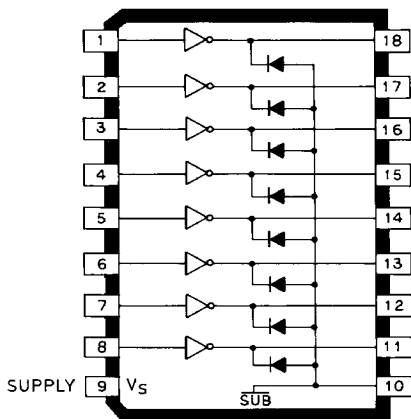


Dwg. No. A-14,333

UDN-2982/84LW

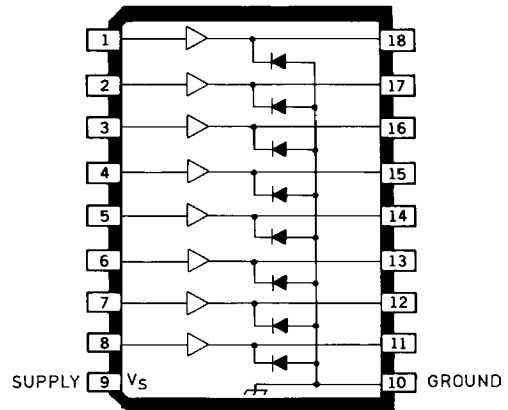


Dwg. No. A-14,339

UDN-2580/85EP

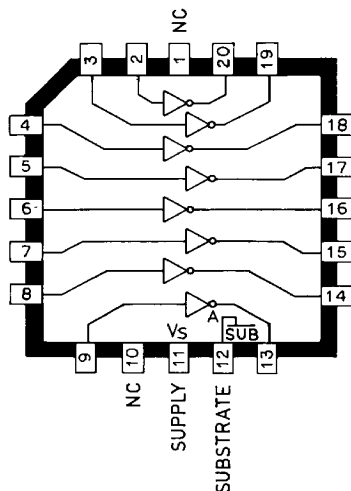

Dwg. No. A-14,334

UDN-2982/84EP
UDS-2982/84EK

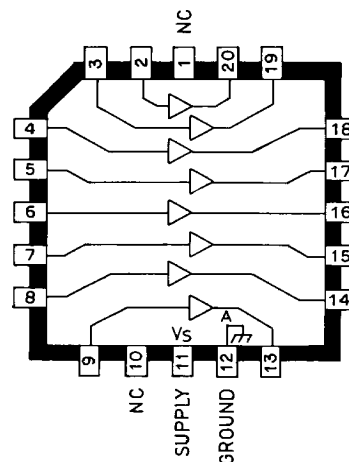

Dwg. No. A-14,338