

SMART POWER IC DRIVERS

BiMOS LATCHED DRIVERS

UCN-5800L and UCN-5801EP

- 500 mA, 50 V Outputs
- Output Transient Protection
- 4.4 MHz Minimum Data Input Rate
- Internal Input Pull-Down Resistors


UCN-5815EP

- -40 mA, 60 V Sourcing Outputs
- 4.4 MHz Minimum Data Input Rate
- Internal Output Pull-Down Resistors

UCN-5881EP


- READ/WRITE Inputs
- 50 mA, 20 V Outputs
- Output Transient Protection
- Over-Temperature Shutdown

UCN-5800L

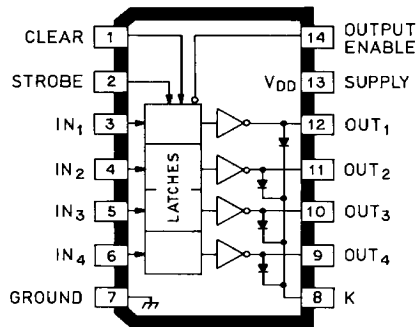


Dwg. No. A-14,352

UCN-5801EP

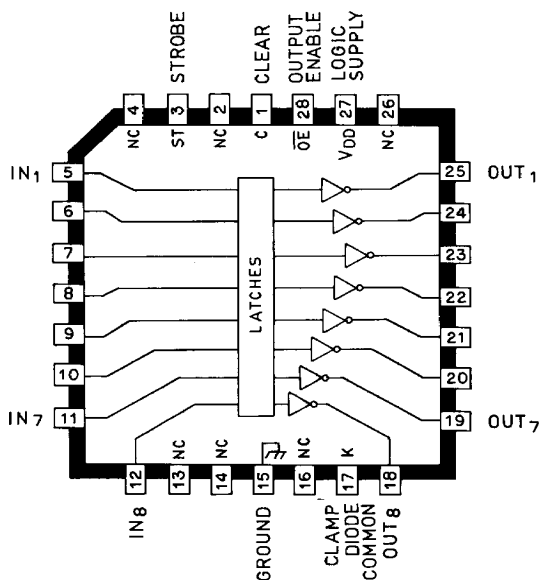


Dwg. No. A-14,353

UCN-5815EP

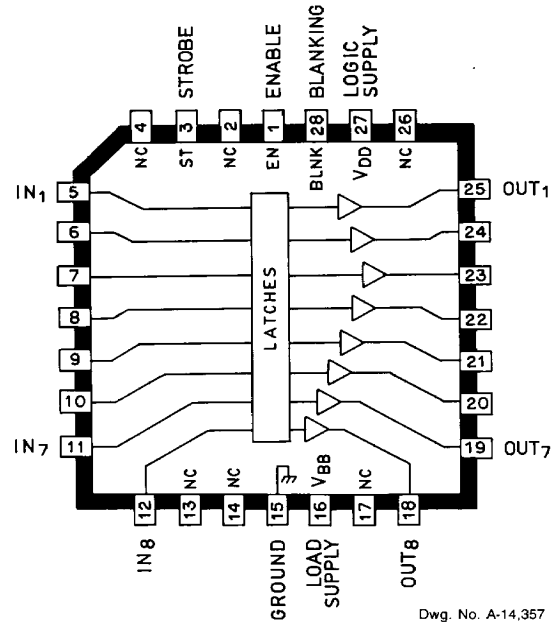

Dwg. No. A-14,357

UCN-5881EP

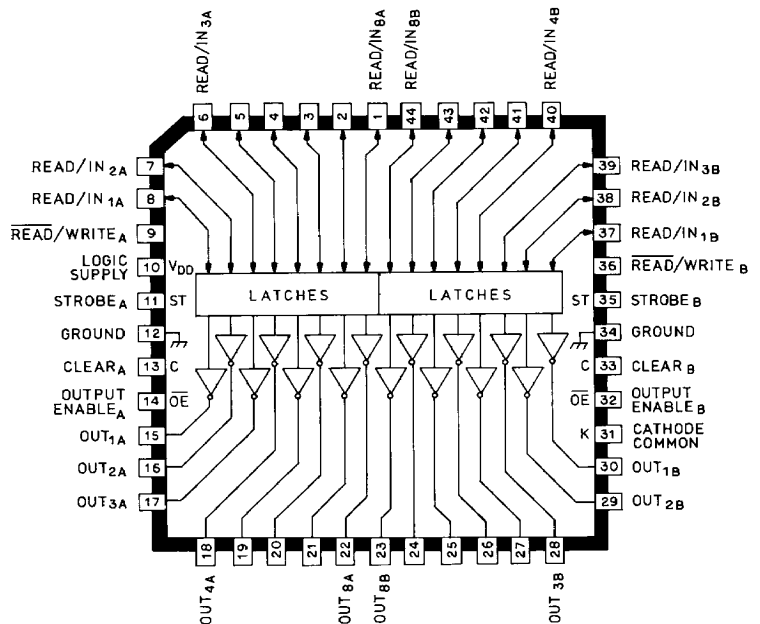

Dwg. No. A-14,367