



148-329

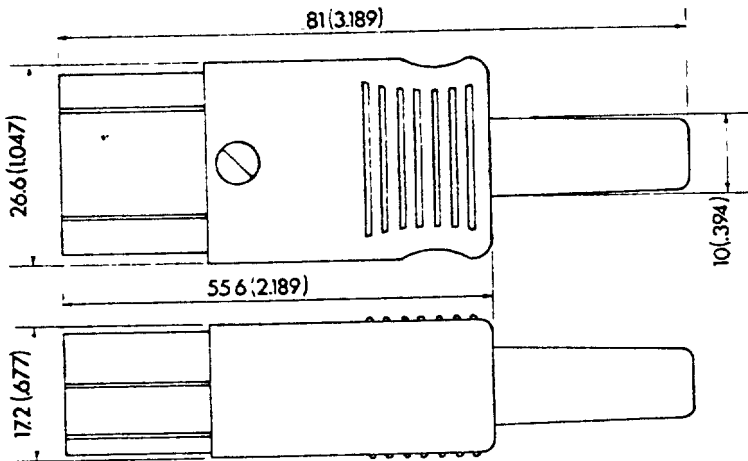

P.597


P.597
BSI Approval applied for
Rating: 10A 250V AC
Colour: Black (other colours to special order)
A model meeting the latest BS4491 "Hot Condition" specifications. For use on kettles, percolators, irons etc. Screw terminal connections. Mating unit P.590

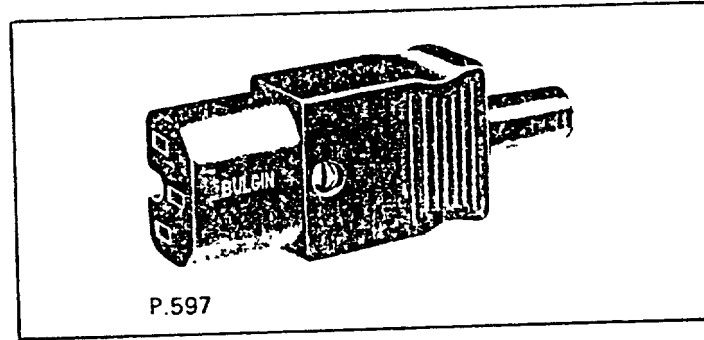


P.597

P597
Dimensions of sockets and
surround as BS4491 standard
sheet XV

Approvals for this range include :-



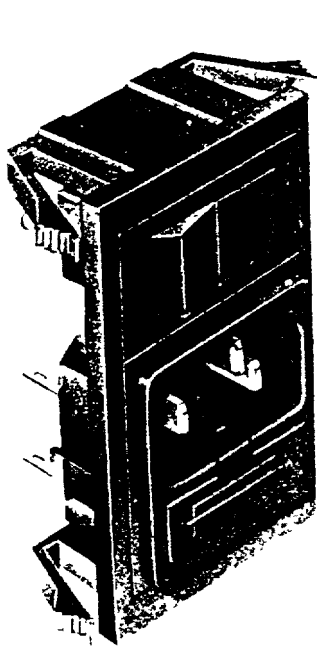


148-329.

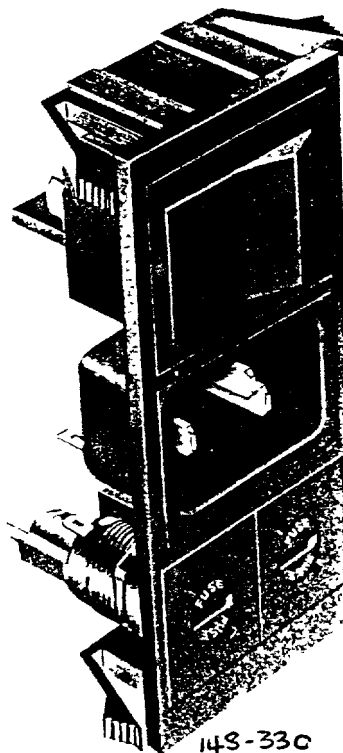

148-330

	148-329 BZ 01002	148-330 BZ 03006
DIM A	2.32" (58.9mm)	3.10" (78.7mm)
DIM B	1.27/64" (36.1mm)	1.27/64" (36.1mm)
DIM C	1" (25.4mm)	1.1/2" (38.0mm)
DIM D	2.312" (58.7mm)	2.437" (62.0mm)
DIM E	2.230" (56.6mm) MIN	3.010" (76.5mm) MIN
DIM F	1.355" (34.4mm) MIN	1.355" (34.4mm) MIN
DIM G	3/8" (9.52mm)	3/8" (9.52mm)

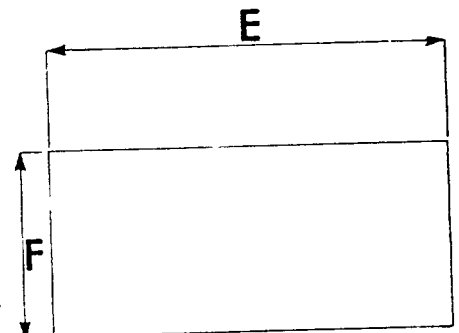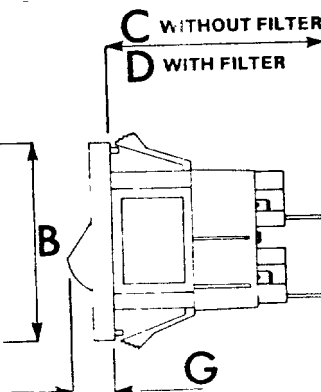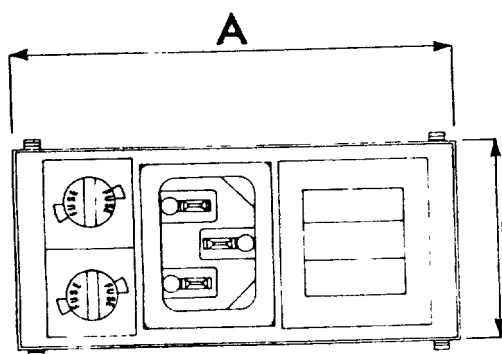

PANEL HOLE DETAILS