


Ultrafast Power Rectifiers

Dual high voltage rectifiers suited for Switchmode Power Supplies and other power converters.

- Very Low Reverse Recovery Time
- Very Low Switching Losses
- Low Noise Turn-Off Switching
- Insulated Package:
Insulating voltage = 2500 VRMS
Capacitance = 45 pF
-  — UL Recognized, File #E69369

Mechanical Characteristics

- Case: Molded epoxy with isolated metal base
- Weight: 28 g (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Shipped 10 units per plastic tube
- Marking: BYT261PIV-1000M



SOT-227B, STYLE 2

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	1000	V
Average Rectified Current $T_C = 60^\circ\text{C}$	$I_F(AV)$	120 60	A
Peak Repetitive Forward Current, Per Diode $t_p < 10 \mu\text{s}$	I_{FRM}	750	A
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	400	A
Operating Junction Temperature	T_J	-40 to +150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case	Per Diode	$R_{\theta JC}$	1.1	$^\circ\text{C/W}$
	Per Device	$R_{\theta JC}$	0.6	
Coupling		$R_{\theta C}$	0.1	

ELECTRICAL CHARACTERISTICS PER DIODE

Instantaneous Forward Voltage (1) $I_F = 60 \text{ A}, T_C = 25^\circ\text{C}$ $I_F = 60 \text{ A}, T_C = 100^\circ\text{C}$	V_F	1.9 1.8	V
Instantaneous Reverse Current (2) $V_R = 1000 \text{ V}, T_C = 25^\circ\text{C}$ $V_R = 1000 \text{ V}, T_C = 100^\circ\text{C}$	I_R	100 6	μA mA

(1) Pulse Test: Pulse Width = 380 μs , Duty Cycle $\leq 2\%$

(2) Pulse Test: Pulse Width = 5 ms, Duty Cycle $< 2\%$



BYT261PIV-1000M**RECOVERY CHARACTERISTICS**

Test Conditions	Symbol	Typ	Max	Unit
$I_F = 1\text{ A}$, $V_R = 30\text{ V}$, $dI_F/dt = -15\text{ A}/\mu\text{s}$	t_{rr}	—	170	ns
$I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_{rr} = 0.25\text{ A}$		—	70	

TURN-OFF SWITCHING CHARACTERISTICS (without series inductance)

Test Conditions	Symbol	Typ	Max	Unit
$V_{CC} = 200\text{ V}$, $I_F = 60\text{ A}$, $T_J = 100^\circ\text{C}$, $L_p < 0.05\text{ }\mu\text{H}$ (See Figure 11)	t_{IRM}	—	200	ns
$dI_F/dt = -240\text{ A}/\mu\text{s}$		120	—	
$dI_F/dt = -480\text{ A}/\mu\text{s}$				
$dI_F/dt = -240\text{ A}/\mu\text{s}$	I_{RM}	—	40	A
$dI_F/dt = -480\text{ A}/\mu\text{s}$		44	—	

TURN-OFF OVERVOLTAGE COEFFICIENT (with series inductance)

Test Conditions	Symbol	Typ	Max	Unit
$T_J = 100^\circ\text{C}$, $V_{CC} = 200\text{ V}$, $I_F = I_{F(AV)}$ $dI_F/dt = -60\text{ A}/\mu\text{s}$, $L_p = 2.5\text{ }\mu\text{H}$ (See Figure 12)	$C = \frac{V_{RP}}{V_{CC}}$	3.3	4.5	

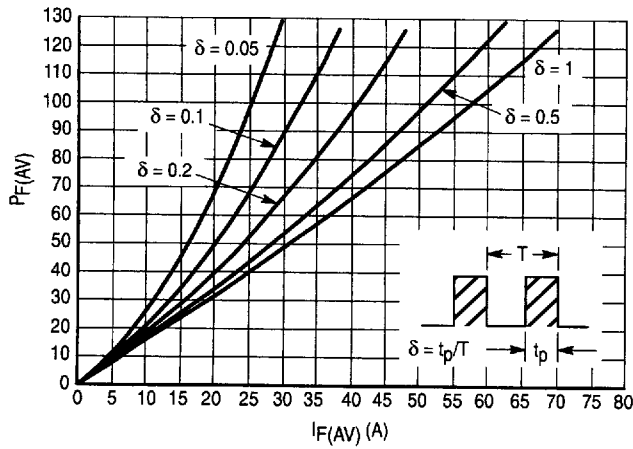


Figure 1. Low Frequency Power Losses versus Average Current

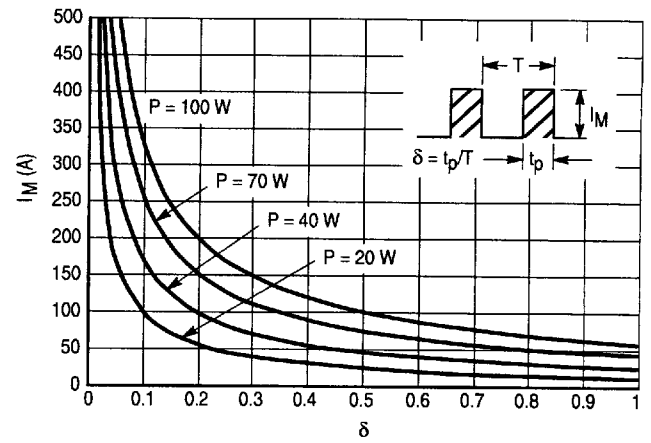


Figure 2. Peak Current versus Form Factor

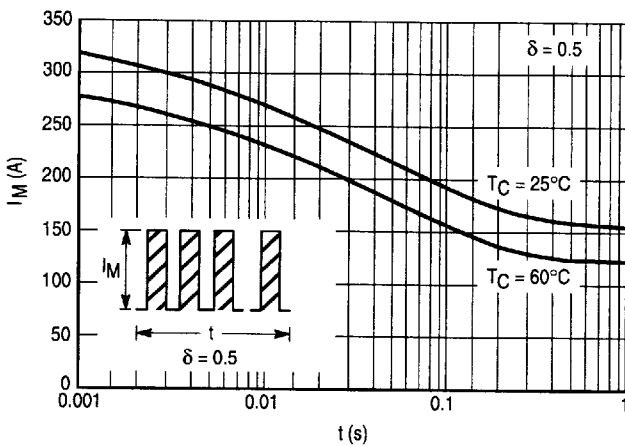


Figure 3. Non-Repetitive Peak Surge Current versus Overload Duration

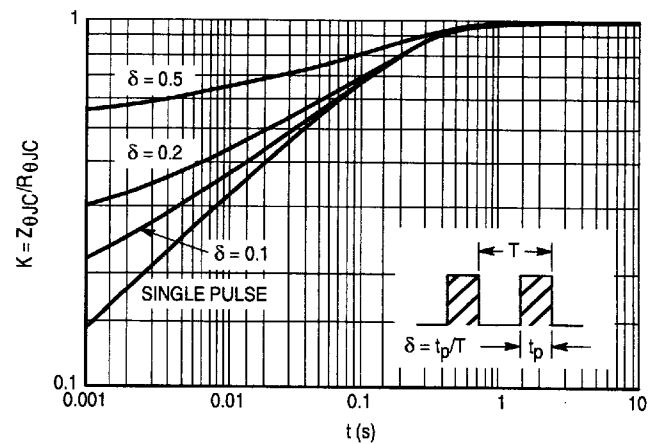


Figure 4. Relative Variation of Thermal Impedance Junction to Case versus Pulse Duration

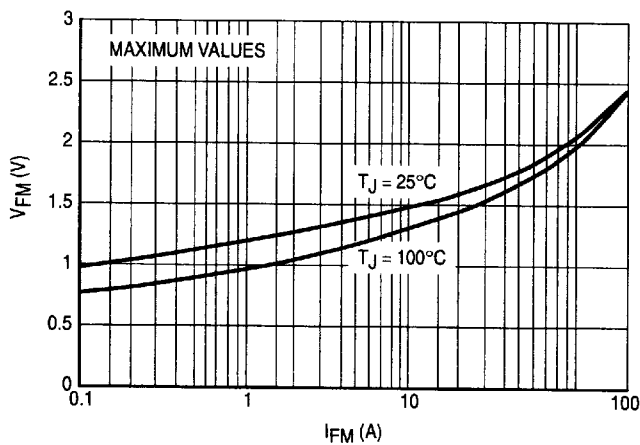


Figure 5. Voltage Drop versus Forward Current

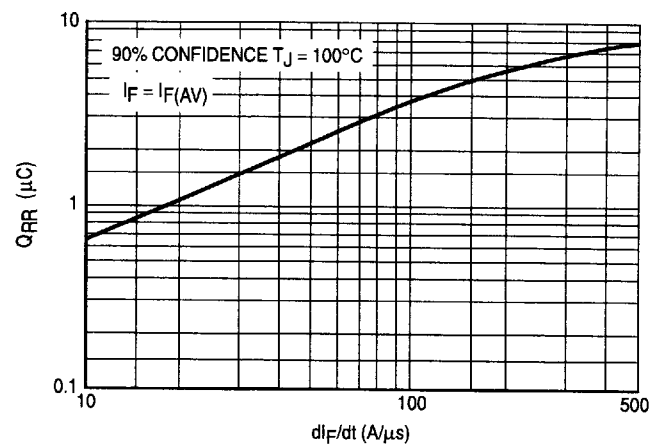


Figure 6. Recovery Charge versus dI_F/dt

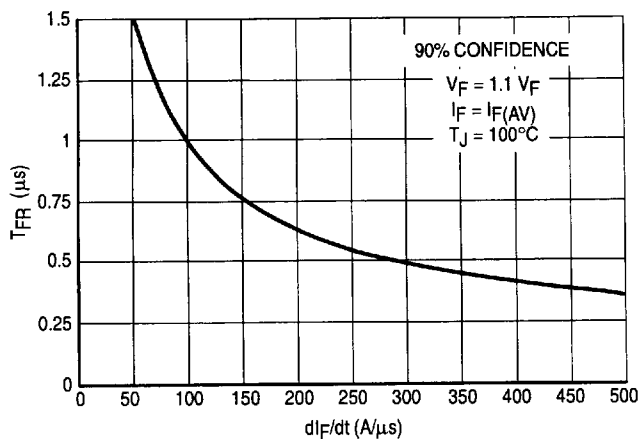


Figure 7. Recovery Time versus dI_F/dt

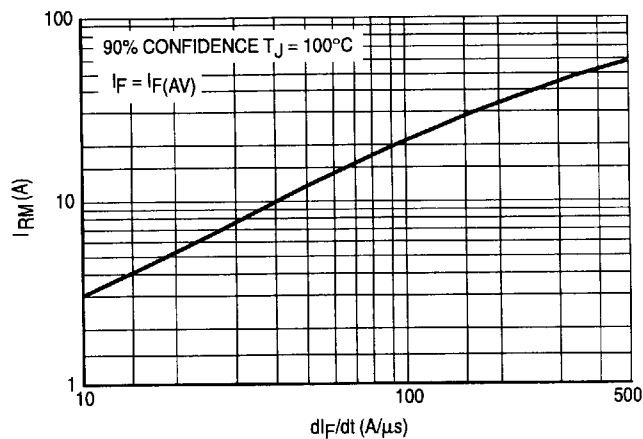


Figure 8. Peak Reverse Current versus dI_F/dt

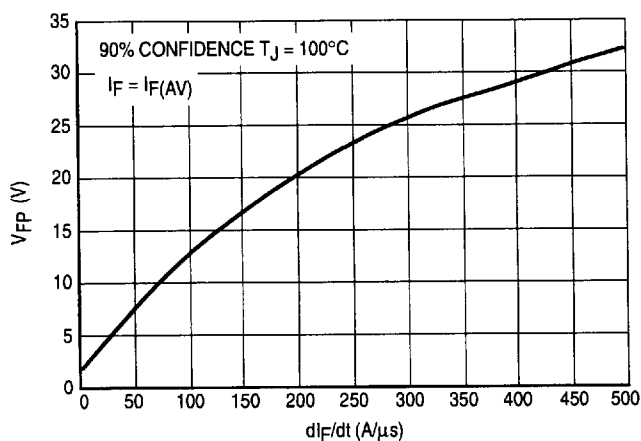


Figure 9. Peak Forward Voltage versus dI_F/dt

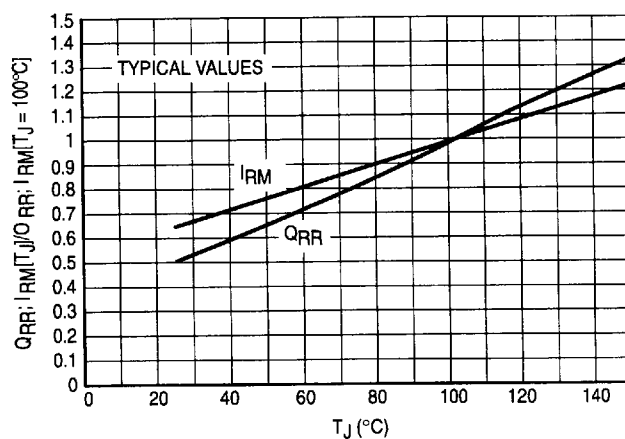


Figure 10. Dynamic Parameters versus Junction Temperature

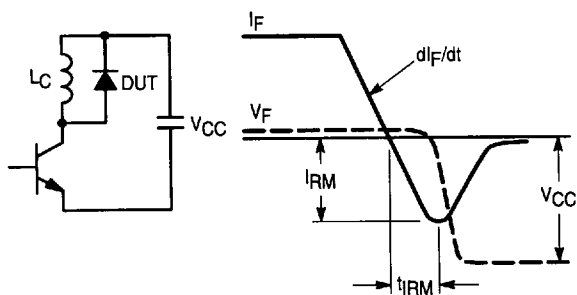


Figure 11. Turn-Off Switching Characteristics (Without series inductance)


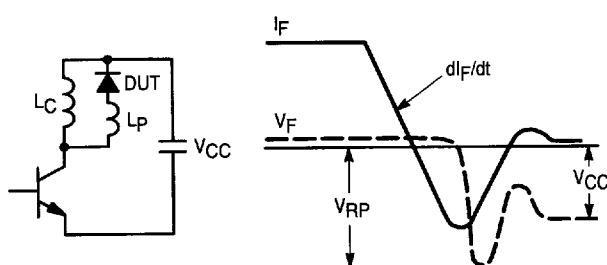


Figure 12. Turn-Off Switching Characteristics (With series inductance)

PACKAGE DIMENSIONS

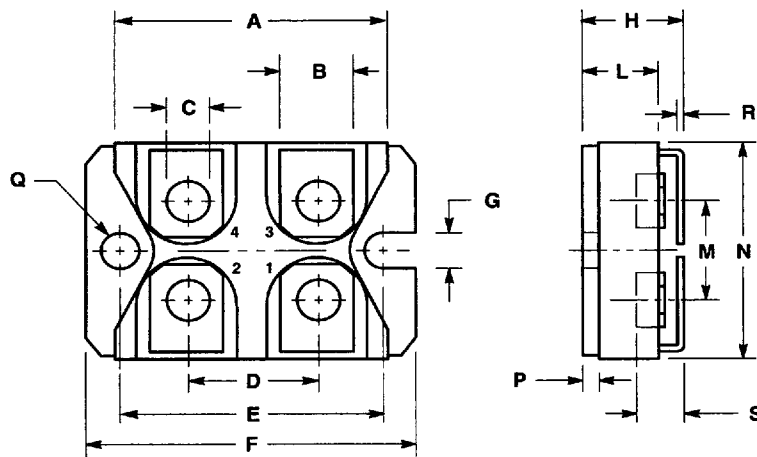

Recommended screw torque: 1.3 ± 0.2 Nm
 Maximum screw torque: 1.5 Nm

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETERS.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	31.50	31.70	1.240	1.248
B	7.80	8.20	0.307	0.322
C	4.10	4.30	0.161	0.169
D	14.90	15.10	0.586	0.590
E	30.10	30.30	1.185	1.193
F	38.00	38.20	1.496	1.503
G	4.00	—	0.157	—
H	11.80	12.20	0.464	0.480
L	8.90	9.10	0.350	0.358
M	12.60	12.80	0.496	0.503
N	25.20	25.40	0.992	1.000
P	1.95	2.05	0.076	0.080
Q	4.10	—	0.157	—
R	0.75	0.85	0.030	0.033
S	5.50	—	0.217	—

- STYLE 2:
 PIN 1. CATHODE 1
 2. ANODE 2
 3. CATHODE 2
 4. ANODE 1

SOT-227B