

uA748C, uA748M **GENERAL-PURPOSE OPERATIONAL AMPLIFIERS**

D921, DECEMBER 1970—REVISED OCTOBER 1990


- Frequency and Transient Response Characteristics Adjustable
- Short-Circuit Protection
- Offset-Voltage Null Capability
- Wide Common-Mode and Differential Voltage Ranges
- Low Power Consumption
- No Latch-Up
- Same Pin Assignments as uA709

description


The uA748 is a general-purpose operational amplifier that offers the same advantages and attractive features as the uA741 except for internal compensation. External compensation can be as simple as a 30-pF capacitor for unity-gain conditions and, when the closed-loop gain is greater than one, can be changed to obtain wider bandwidth or higher slew rate. This circuit features high gain, large differential and common-mode input voltage range, and output short-circuit protection. Input offset voltage adjustment can be provided by connecting a variable resistor between the offset null pins as shown in Figure 12.

The uA748C is characterized for operation from 0°C to 70°C; the uA748M is characterized for operation over the full military temperature range of -55°C to 125°C.

uA748C . . . D OR P PACKAGE
uA748M . . . JG PACKAGE
(TOP VIEW)




uA748M . . . U FLAT PACKAGE
(TOP VIEW)



NC—No internal connection

symbol

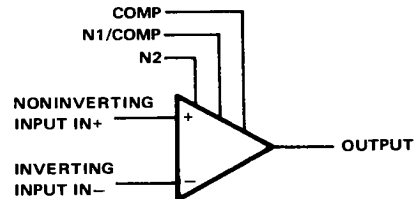

AVAILABLE OPTIONS

T _A	V _{IO} MAX AT 25°C	PACKAGE			
		8-PIN			10-PIN
		SMALL OUTLINE (D)	CERAMIC DIP (JG)	PLASTIC DIP (P)	FLAT PACK (U)
0°C to 70°C	6 mV	uA748CD	—	uA748CP	—
-55°C to 125°C	5 mV	—	uA748MJG	—	uA748MU

The D package is available taped and reeled. Add the suffix R to the device type, (e.g., uA748CDRI).

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1990, Texas Instruments Incorporated

2-1319

uA748C, uA748M **GENERAL-PURPOSE OPERATIONAL AMPLIFIERS**

schematic

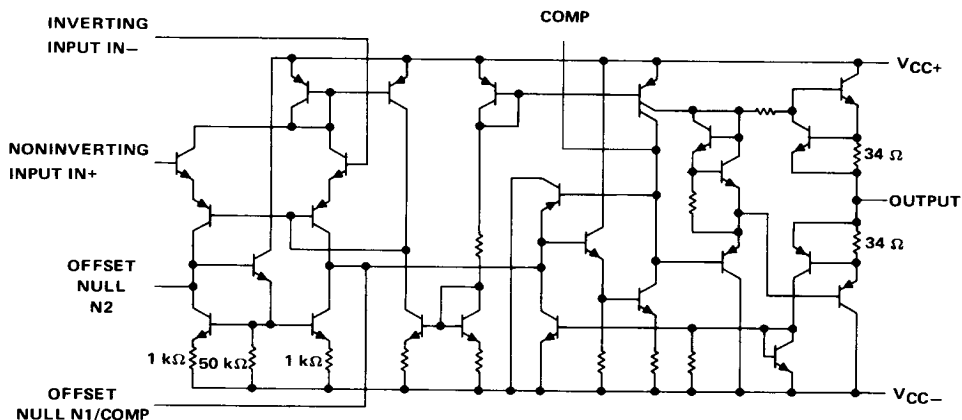

Resistor values shown are nominal.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

	uA748C	uA748M	UNIT
Supply voltage V_{CC+} (see Note 1)	18	22	V
Supply voltage V_{CC-} (see Note 1)	-18	-22	V
Differential input voltage (see Note 2)	± 30	± 30	V
Input voltage (either input, see Notes 1 and 3)	± 15	± 15	V
Voltage range between either offset null terminal (N1/N2) and V_{CC-}	-0.5 to 2	-0.5 to 2	V
Duration of output short-circuit (see Note 4)	unlimited	unlimited	
Continuous total power dissipation	See Dissipation Rating Table		
Operating free-air temperature range	0 to 70	-55 to 125	°C
Storage temperature range	-65 to 150	-65 to 150	°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds	JG or U package		
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	D or P package		
	260		°C

- NOTES: 1. All voltage values, unless otherwise noted, are with respect to the midpoint between V_{CC+} and V_{CC-} .
2. Differential voltages are at the noninverting input terminal with respect to the inverting input terminal.
3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.
4. The output may be shorted to ground or either power supply. For the uA748M only, the unlimited duration of the short-circuit applies at (or below) 125°C case temperature or 75°C free-air temperature.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR	DERATE ABOVE T_A	$T_A = 70^\circ\text{C}$ POWER RATING	$T_A = 125^\circ\text{C}$ POWER RATING
D	500 mW	5.8 mW/°C	64°C	464 mW	N/A
JG	500 mW	8.4 mW/°C	90°C	500 mW	210 mW
P	500 mW	N/A	N/A	500 mW	N/A
U	500 mW	5.4 mW/°C	57°C	432 mW	135 mW

uA748C, uA748M
GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

electrical characteristics at specified free-air temperature, $V_{CC+} = 15\text{ V}$, $V_{CC-} = -15\text{ V}$, $C_C = 30\text{ pF}$

PARAMETER		TEST CONDITIONS†		uA748C			uA748M			UNIT	
				MIN	TYP	MAX	MIN	TYP	MAX		
V _{IO}	Input offset voltage	V _O = 0	25°C	1		6	1		5	mV	
			Full range	7.5							
I _{IO}	Input offset current	V _O = 0	25°C	20		200	20		200	nA	
			Full range	300							
I _{IB}	Input bias current	V _O = 0	25°C	80		500	80		500	nA	
			Full range	800							
V _{ICR}	Common-mode input voltage range		25°C	± 12	± 13		± 12	± 13		V	
			Full range	± 12			± 12				
V _{OM}	Maximum peak output voltage swing	R _L = 10 kΩ	25°C	± 12	± 14		± 12	± 14		V	
		R _L ≥ 10 kΩ	Full range	± 12			± 12				
		R _L = 2 kΩ	25°C	± 10		± 13		± 10	± 13		
		R _L ≥ 2 kΩ	Full range	± 10			± 10				
A _{VD}	Large-signal differential voltage amplification	R _L ≥ 2 kΩ, V _O = ± 10 V	25°C	20	200		50	200		V/mV	
			Full range	15			25				
r _i	Input resistance		25°C	0.3	2		0.3	2		MΩ	
r _o	Output resistance	V _O = 0, See Note 5	25°C	75			75			Ω	
C _i	Input capacitance		25°C	1.4			1.4			pF	
CMRR	Common-mode rejection ratio	V _{IC} = V _{ICR} min, V _O = 0	25°C	70	90		70	90		dB	
			Full range	70			70				
k _{SVS}	Supply voltage sensitivity (ΔV _{IO} /ΔV _{CC})	V _{CC} = ± 9 V to ± 15 V, V _O = 0	25°C	30	150		30	150		μV/V	
			Full range	150			150				
I _{OS}	Short-circuit output current		25°C	± 25		± 40	± 25		± 40	mA	
I _{CC}	Supply current	No load, V _O = 0	25°C	1.7	2.8		1.7	2.8		mA	
			Full range	3.3			3.3				
P _D	Total power dissipation	No load, V _O = 0	25°C	50	85		50	85		mW	
			Full range	100			100				

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. Full range for uA748C is 0°C to 70°C and for uA748M is -55°C to 125°C.

NOTE 5: This typical value applies only at frequencies above a few hundred hertz because of the effects of drift and thermal feedback.

operating characteristics, $V_{CC+} = 15\text{ V}$, $V_{CC-} = -15\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_r Rise time	$V_I = 20\text{ mV}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, $C_C = 30\text{ pF}$,		0.3		μs
Overshoot factor	See Figure 1		5%		
SR Slew rate at unity gain	$V_I = 10\text{ V}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, $C_C = 30\text{ pF}$, See Figure 1		0.5		V/ μs

uA748C, uA748M
GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

PARAMETER MEASUREMENT INFORMATION

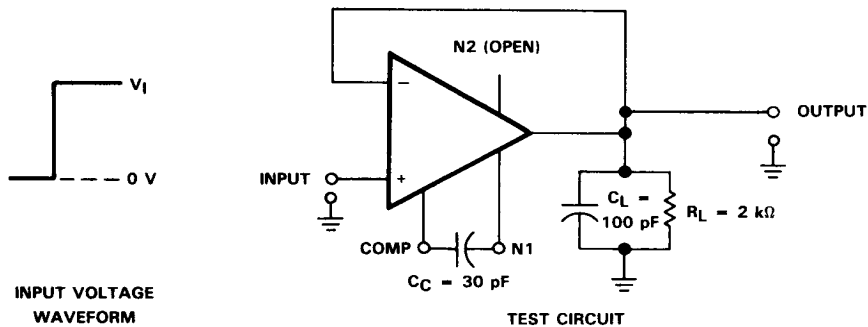


FIGURE 1. RISE TIME, OVERSHOOT, AND SLEW RATE

TYPICAL CHARACTERISTICS

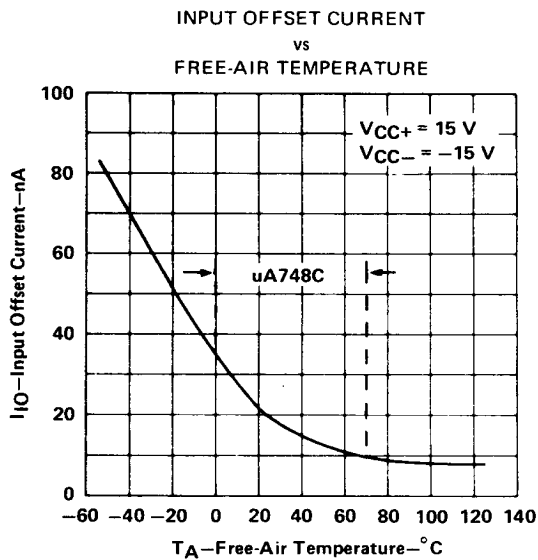


FIGURE 2

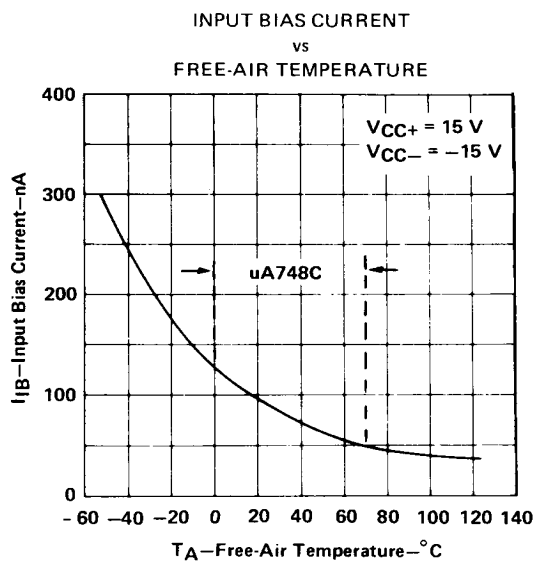


FIGURE 3

TYPICAL CHARACTERISTICS

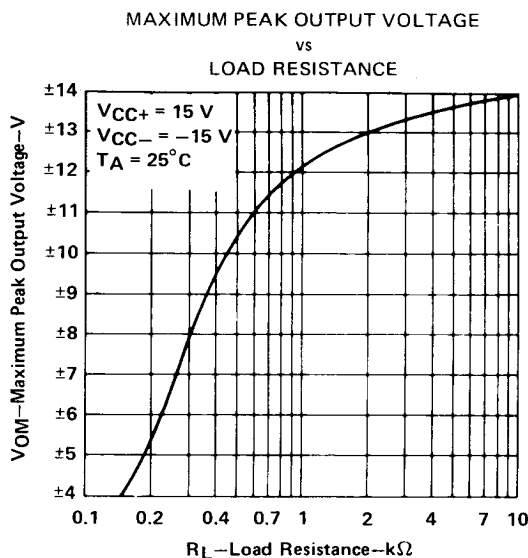


FIGURE 4

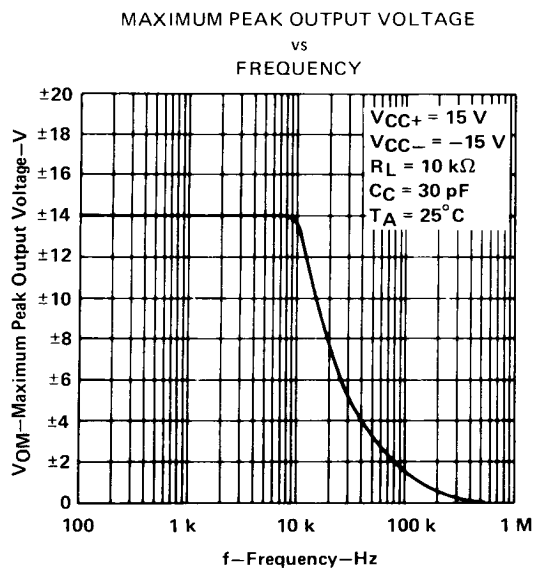


FIGURE 5

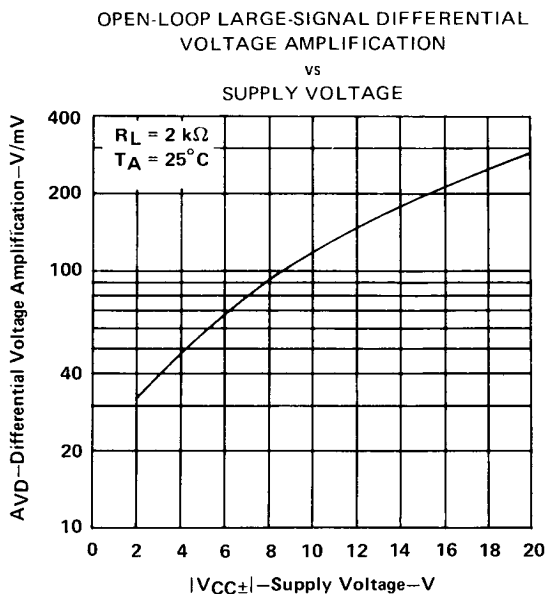


FIGURE 6

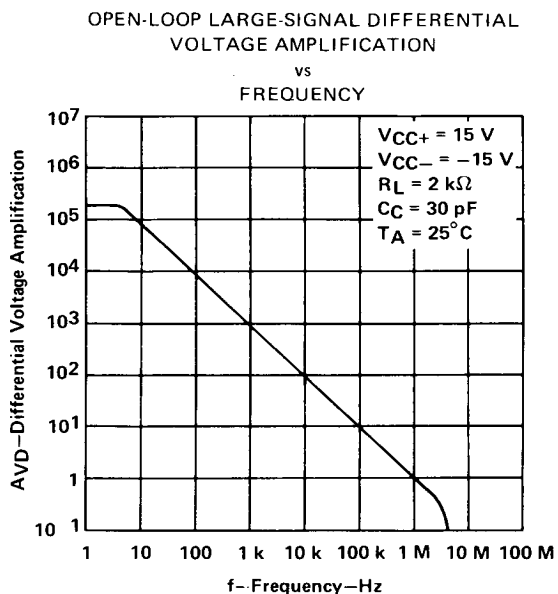


FIGURE 7

TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-1323

TYPICAL CHARACTERISTICS

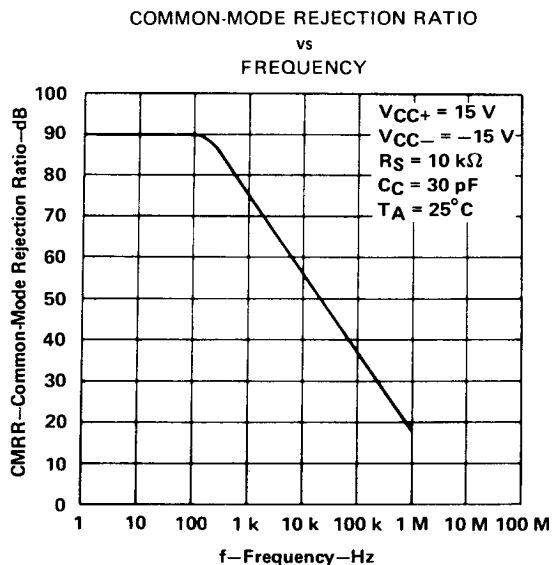


FIGURE 8

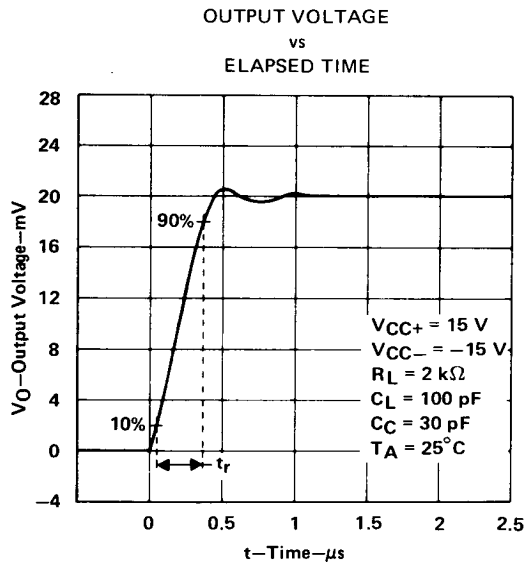


FIGURE 9

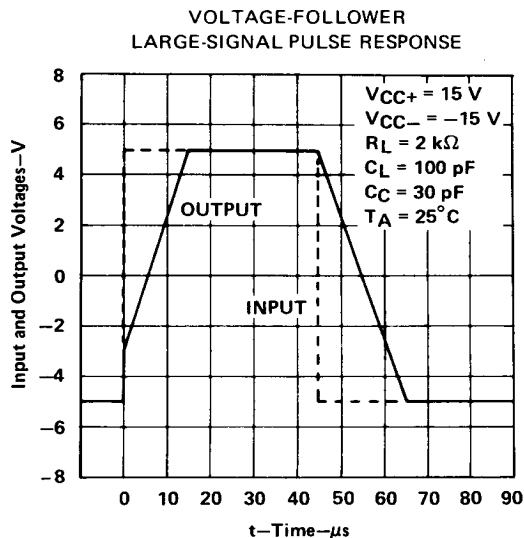


FIGURE 10

TYPICAL APPLICATION DATA





FIGURE 11. UNITY-GAIN VOLTAGE FOLLOWER

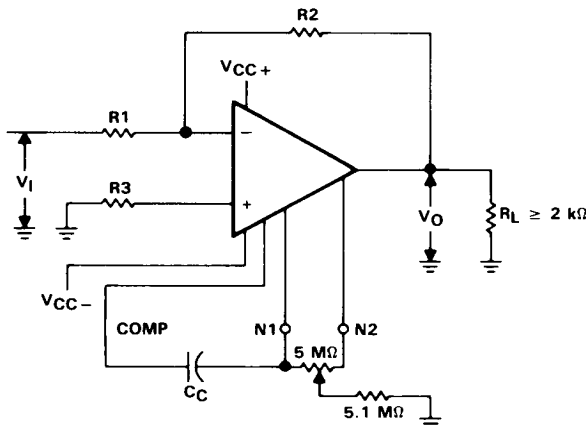

$$\frac{V_O}{V_I} = -\frac{R_2}{R_1}$$

$$C_C \approx \frac{R_1 \cdot 30 \text{ pF}}{R_1 + R_2}$$

$$R_3 = \frac{R_1 \cdot R_2}{R_1 + R_2}$$

FIGURE 12. INVERTING CIRCUIT WITH ADJUSTABLE GAIN
COMPENSATION, AND OFFSET ADJUSTMENT