



1. Mechanical Dimensions:

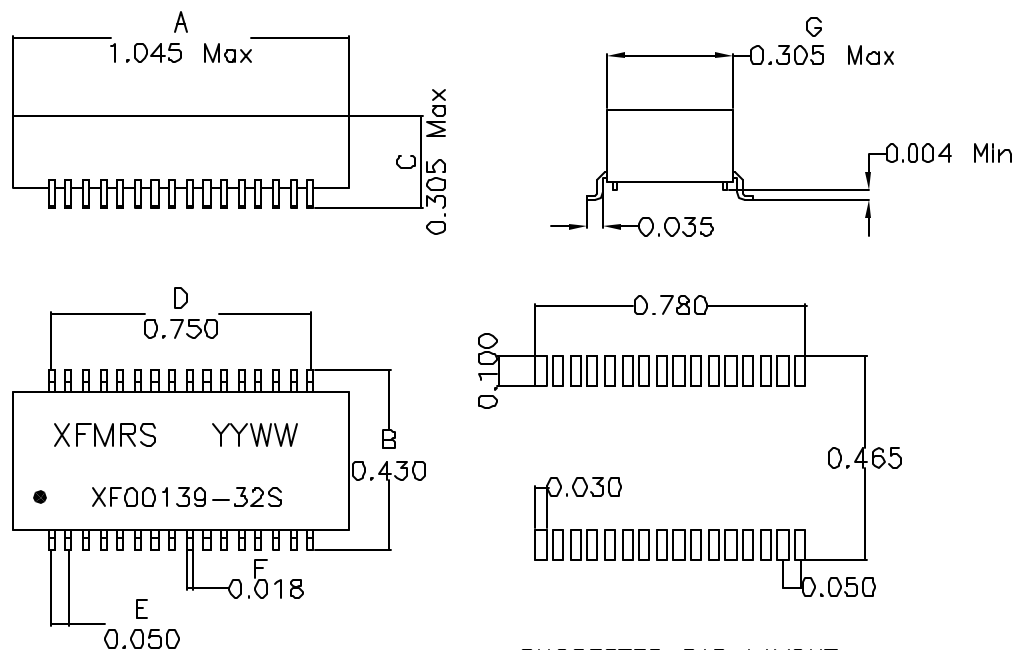

2. Schematic:

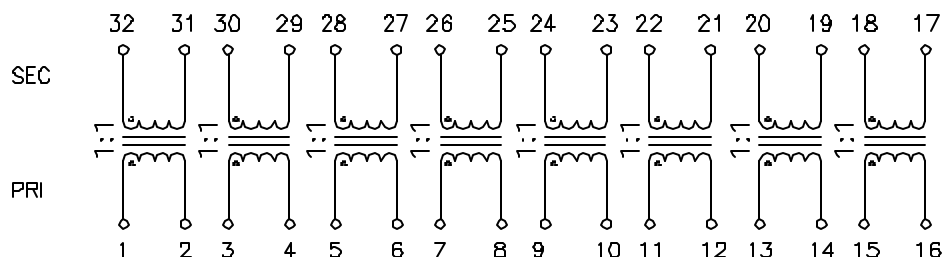

DOC REV: A/2

3. Electrical Specifications: @25°C

ISOLATION: 1500Vrms (PRI to SEC)

TURNS RATIO: (PRI:SEC)=1:1±2%

SEC OCL: 1.20mH Min @10KHz 50mV

CW/W: 30pF Max @10KHz 50mV (PRI/SEC)

SEC LL: 0.6uH Max @100KHz 50mV, Short PRI

CROSSTALK: -60dB Typ

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004" (0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com	Title: T1/E1/CEPT QUAD PORT		
	P/N: XF00139-32S		REV. A
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010	DWN. 罗振江	Jun-06-05
	Dimensions in INCH	CHK. 廖玉坤	Jun-06-05
SHEET 1 OF 1	APP. BW		Jun-06-05