



1. Dimensions:

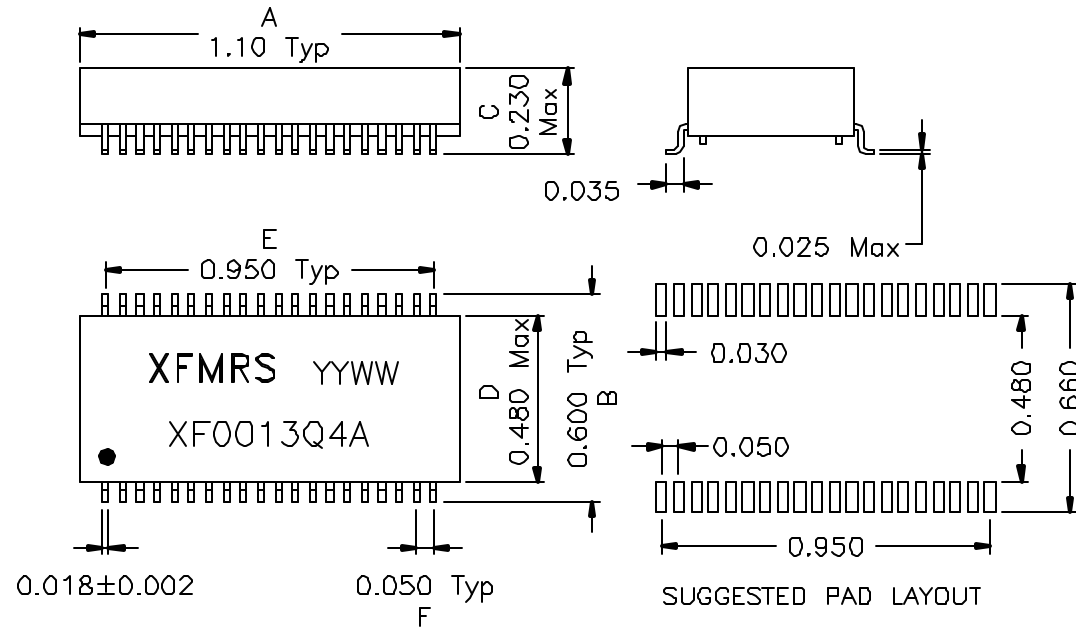

2. Schematic:

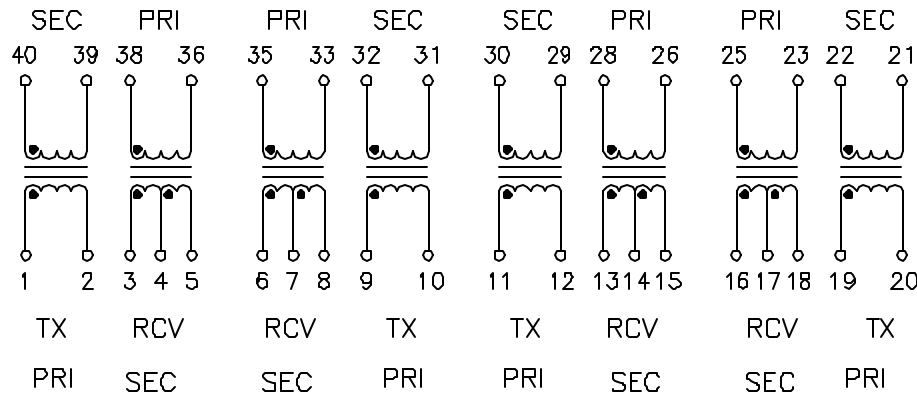

DOC. REV. A/3

3. Electrical Specifications: @25°C

Isolation: 1500 Vrms (PRI to SEC)

TX Turns Ratio: 1:2 ±2% (PRI:SEC)

RCV Turns Ratio: 1:2CT ±2% (PRI:SEC)

TX PRI OCL: 1.20mH Minimum @100KHz 50mV

RCV PRI OCL: 1.20mH Minimum @100KHz 50mV

Cw/w: 35pF Maximum @100KHz 50mV (PRI/SEC)

TX PRI LL: 0.6uH Maximum @100KHz 50mV

(SEC Shorted)

RCV PRI LL: 0.6uH Maximum @100KHz 50mV

(SEC Shorted)

PRI DCR: 0.9 Ohms Maximum

SEC DCR: 1.3 Ohms Maximum

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C

XFMRS Inc	Title: T1/E1/CEPT QUAD PORT			
	P/N: XF0013Q4A		REV. A	
	UNLESS OTHERWISE SPECIFIED		DWN.	廖玉坤
	TOLERANCES:		CHK.	李清儿
	.xxx ±0.010		APP.	BW

Dimensions in INCH

SHEET 1 OF 1

Feb-20-01

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION