


Schematic:

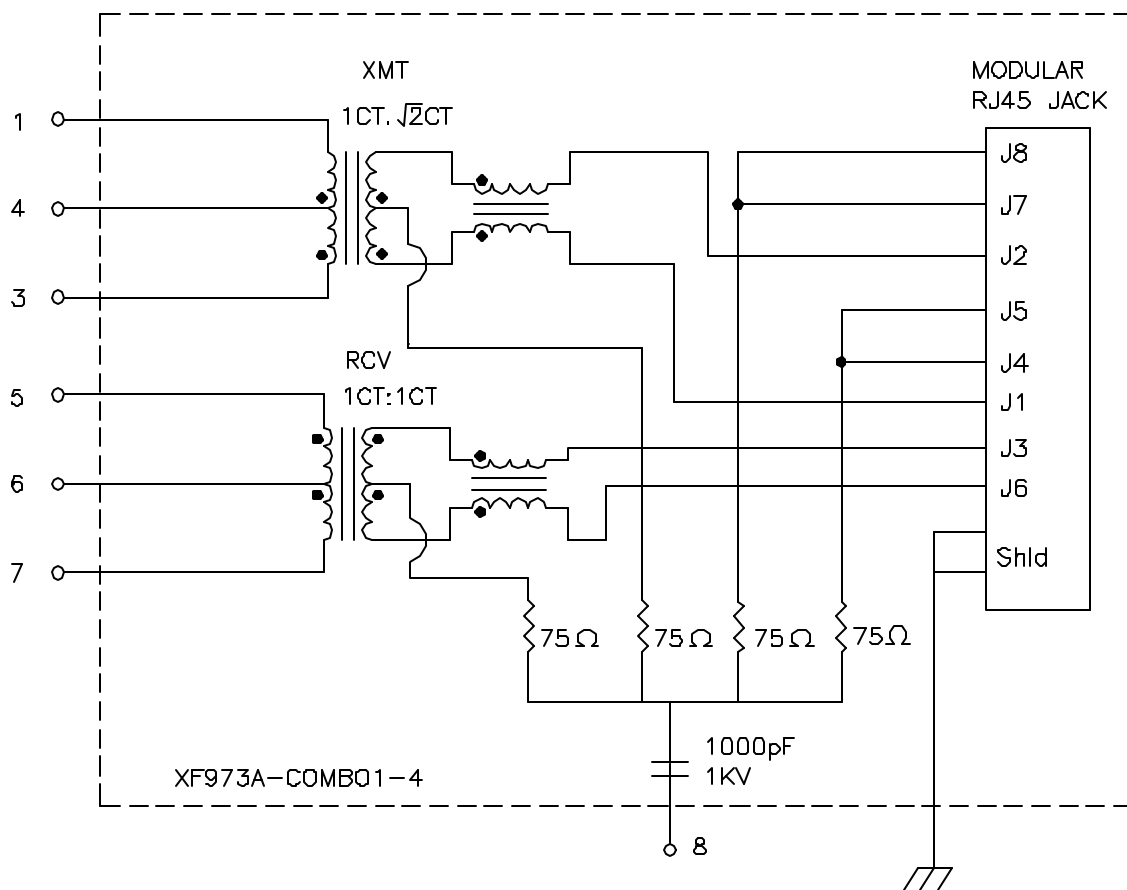

Electrical Specifications: @25°C

ISOLATION: 1500 Vrms (Input to Output)

TURN RATIO: 1CT:1CT $\pm$ 3% (RCV)

TURN RATIO: 1CT: $\sqrt{2}$ CT $\pm 3\%$ (XMT)

CABLE SIDE OCL: 350uH Minimum @100KHz 100mV 8mADC

C_w/w: 27pF Typical @100KHz 100mV

RX RETURN LOSS: @30MHz -20dB Typ

@80MHz -15dB Typ

INSERTION LOSS (0.3-100MHz): -1.0dB Maximum

XFMRS Inc.		Title: SINGLE PORT COMBO	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF973A-COMBO1-4		REV. A
	DWN.	廖玉坤	Sep-27-00
	CHK.	李清儿	Sep-27-00
SHEET 1 OF 2	APP.	BW	Sep-27-00

DOC. REV: A/1