



1. Mechanical Dimensions:

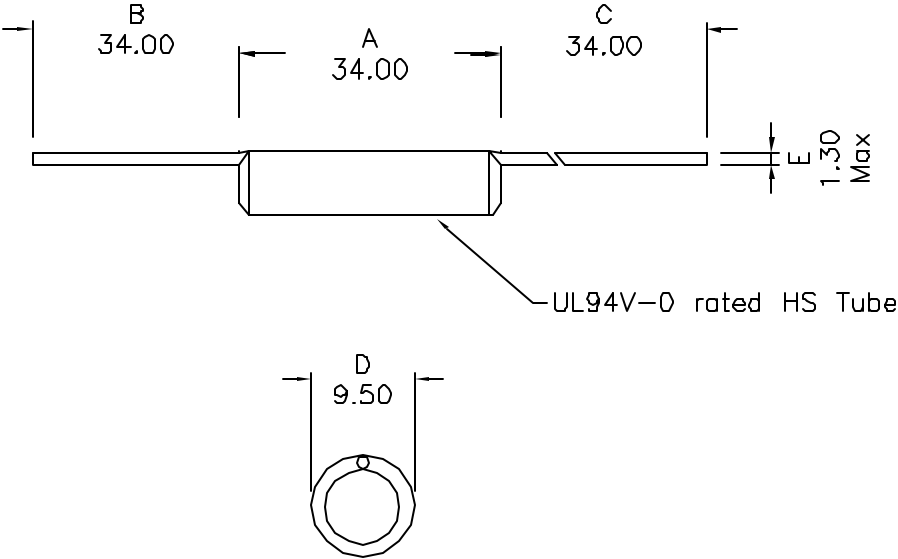

2. Schematic:



3. Electrical Specifications:

OCL: 5uH Typ @10KHz 1V
DCR: 0.005 Ohms Typ
Current Rating: 10 A Max
SRF: 175 MHz Typ
Voltage Rating: 500V dc/ac

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Aqueous wash compatible

DOC REV: A/1

XFMRS Inc	Title: INDUCTOR			
	UNLESS OTHERWISE SPECIFIED		P/N: XFAL3409-5R0	REV. A
	TOLERANCES:		DWN.	刘 鹏
	.xxx ±0.010		CHK.	李小锋
Dimensions in INCH				Sep-23-03
SHEET 1 OF 1		APP.	BW	Sep-23-03