


XFMRS

XFEB160808 SERIES CHIP BEADS

- * TAPE AND REEL PACKAGING FOR HIGH VOLUME MANUFACTURING
4000 PCS PER 7" REEL
- * FOR DC/DC CONVERTERS, DC/AC INVERTERS, VRM APPLICATIONS
- * TEMP. RISE; 15°C TYPICAL ABOVE 60°C AMBIENT
- * OPERATING TEMP.: -40°C TO +125°C
- * RoHS Compliant

Mechanical Dimensions:

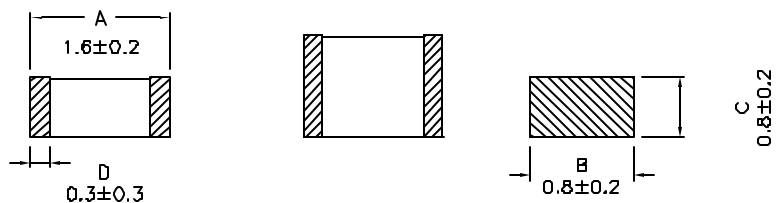

Part Number	IMPEDANCE (Ohms)	Test Frequency (MHz)	RDC Max (Ohms)	IDC Max (mA)
XFEB160808-300	30±25%	100	0.20	200
XFEB160808-400	40±25%	100	0.20	200
XFEB160808-600	60±25%	100	0.20	200
XFEB160808-800	80±25%	100	0.30	200
XFEB160808-121	120±25%	100	0.30	200
XFEB160808-221	220±25%	100	0.50	100
XFEB160808-301	300±25%	100	0.60	100
XFEB160808-451	450±25%	100	0.70	100
XFEB160808-601	600±25%	100	0.80	100
XFEB160808-751	750±25%	100	1.00	100
XFEB160808-102	1000±25%	100	1.00	100

Graphs

