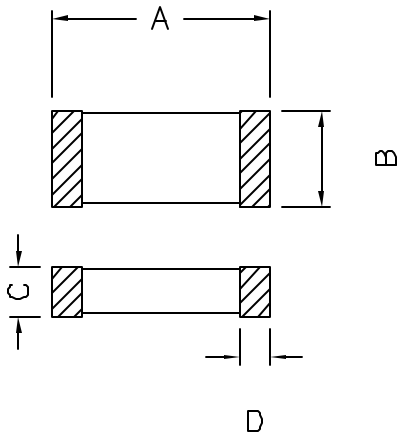


XFMRs, Inc.

SPECIFICATION FOR APPROVAL

XFMRs P/N : XFEB321611-601-0.5A				Rev: A/1	
DIMENSION : (m/m) 				A	3.2±0.2 m/m
				B	1.6±0.2 m/m
				C	1.1±0.2 m/m
				D	0.5±0.3 m/m
				E	m/m
				F	m/m
				G	m/m
				H	m/m
				I	m/m
				J	m/m
				K	m/m
				L	m/m
				M	m/m
				N	m/m
				O	m/m
ELECTRICAL REQUIREMENTS				TEST INSTRUMENTS	
Z	600±25% Ohms	TEST FREQ.	100 MHz	HP 34401A MULTIMETER HP 4195 NETWORKS/SPECTRUM ANALYZER HP 42841 BIAS CURRENT SOURCE HP 4285A LCR METER HP 4286A RF LCR METER HP 4291A RF IMPEDANCE / MATERIAL ANALYZER HP 4338A MILLION OHM METER HP 6632A DC POWER SUPPLY HP4284A PRECISION LCR METER	
Rdc	0.100 Ohms Max	TEST FREQ.	MHz		
Idc	500mA MAX.	TEST FREQ.	MHz		
Notes: 1. Solderability: Leads shall meet MIL-STD-202, Method 2080 for solderability. 2. Flammability: UL94V-0 3. ASTM oxygen index: > 28% 4. Insulation System: Class F 155°C. UL file E151556 5. Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +125°C 6. Storage Temperature Range: -55°C to +125°C 7. Aqueous wash compatible					
DRAWN BY :		CHECKED BY :		APPROVED BY :	
LI Xiaofeng		Liao		BW	
PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.					