



XFE322513 SERIES CHIP BEADS

- * TAPE AND REEL PACKAGING FOR HIGH VOLUME MANUFACTURING
3000 PCS PER 13"REEL
- * FOR DC/DC CONVERTERS, DC/AC INVERTERS, VRM APPLICATIONS
- * TEMP. RISE; 15°C TYPICAL ABOVE 60°C AMBIENT
- * OPERATING TEMP.: -40°C TO +125°C

Schematic:



Mechanical Dimensions:

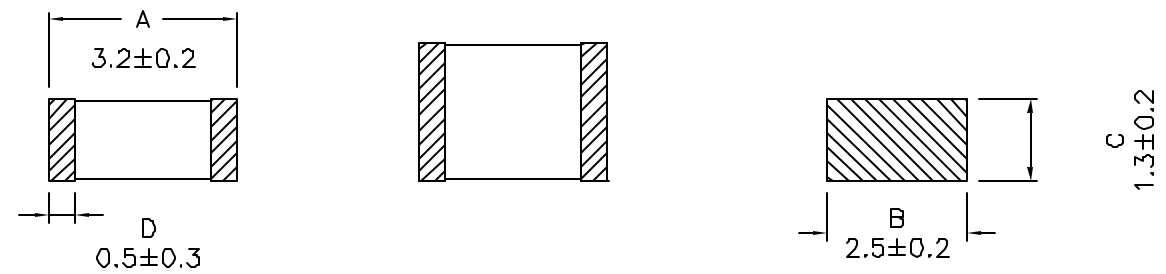

Part Number	IMPEDANCE (Ohms)	Test Frequency (MHz)	RDC Max (Ohms)	IDC Max (mA)
XFE 322513 -320	32±25%	100	0.30	400
XFE 322513 -600	60±25%	100	0.30	400
XFE 322513 -900	90±25%	100	0.30	400
XFE 322513 -202	2000±25%	30	1.50	100