



XFE451616 SERIES CHIP BEADS

- * TAPE AND REEL PACKAGING FOR HIGH VOLUME MANUFACTURING
2000 PCS PER 7”REEL
- * FOR DC/DC CONVERTERS, DC/AC INVERTERS, VRM APPLICATIONS
- * TEMP. RISE; 15°C TYPICAL ABOVE 60°C AMBIENT
- * OPERATING TEMP.: -40°C TO +125°C

Schematic:



Mechanical Dimensions:

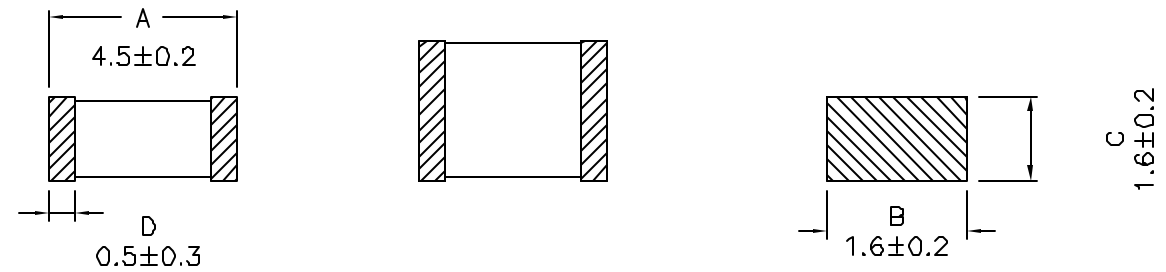

Part Number	IMPEDANCE (Ohms)	Test Frequency (MHz)	RDC Max (Ohms)	IDC Max (mA)
XFE 451616 -330	33±25%	100	0.30	400
XFE 451616 -600	60±25%	100	0.30	400
XFE 451616 -800	80±25%	100	0.30	400
XFE 451616 -101	100±25%	100	0.40	300
XFE 451616 -151	150±25%	100	0.50	200
XFE 451616 -171	170±25%	100	0.50	200