



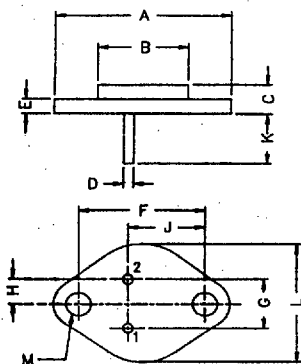

DIM	MIN	MAX
A	—	39,37
B	—	22,22
C	6,35	8,50
D	0,96	1,09
E	—	1,77
F	29,90	30,4
G	10,69	11,18
H	5,20	5,72
J	16,64	17,15
K	11,15	12,25
L	—	26,67
M	3,84	4,19

ALL DIMENSIONS ARE IN M.M.



PIN CONFIGURATION
 1. BASE
 2. EMITTER
 3. COLLECTOR

TO-3 Power Package Transistors (NPN)

	Maximum Ratings							Electrical Characteristics (Ta=25°C, Unless Otherwise Specified)														
Type No.	V _{CBO} (V) Min	V _{CEO} (V) Min	V _{EBO} (V) Min	P _D (W) @Tc=25°C	I _C (A)	I _{CBO} (μA) Max	V _{CB} @ (V)	I _{CES} (μA) Max	V _{CE} @ (V)	h _{FE} @ Min	h _{FE} @ Max	I _C & V _{CE} (A) (V)	V _{CE(SAT)} (V) & Max	V _{BE(SAT)} (V) Min	V _{BE(SAT)} (V) Max	I _C @ (A)	C _{ob} (pF) Max	f _t (MHz) Min	f _t (MHz) Typ	f _t (MHz) Max	I _C (mA)	
2N3055	100	60	7	117	15			*1000	100	20 5	70	4 10	4 4	1.1 3			4 10		2.5			500
2N3055HV	100	100	7	90	15			*1000	100	20 5	100	4 10	4 4	1.1 3			4 10		2.5			500
2N3773	160	140	7	150	16	2000	140			15 5	60	8 16	4 4	1.4 4			8 16					
2N4347	140	120	7	100	5			*2000	125	15 10	60	2 5	4 4	1 2			2 5					500
2N6253	50	45	7	115	15			*2000	55	20 3	70	3 15	4 4	1.0 4.0			3 15					
2N6257	50	40	5	150	20	4000	50			15 4	75	8 20	4 4	1.5 4.0			8 20	200				1000
2N6371	50	40	7	117	15					15 4	60	8 16	4 4	1.5 4.0			8 16	800				1000
2N6371HV	100	100	5	90	15			*2000	45	15 4	60	8 16	4 4	1.5 4.0			8 16	330	2.5			500
BDY20	60	60	7	120	15					20	70	4	4	3			15	1				1000
BDY38	50	40	7	115	6	1000	50	1000	50	30		2	4	0.7			2	1				
BDY55	100	60	7	117	15			\$5000	100	30 20 10	70	0.2 4 10	4 4 4	1.1 2.5			4 10	10				1000
BDY73	60	60	7	115	15					50	150	4	4				15					
BU109	330	150	6	60	7			5000 100	330 200					1	1.2	5		10				500

*NOTE: I_{CEX}

2383394 0001318 T28

TO-3 Power Package Transistors (NPN)

CDIL

	Maximum Ratings									Electrical Characteristics (Ta=25°C, Unless Otherwise Specified)											
Type No.	V _{CBO} (V) Min	V _{CEO} (V) Min	V _{EBO} (V) Min	P _D (W) @Tc=25°C	I _C (A)	I _{CBO} (μA) Max	V _{CB} @ (V)	I _{CES} (μA) Max	V _{CE} @ (V)	h _{FE} @	I _C & V _{CE} (A) (V)	V _{CE(SAT)} (V) & Max	V _{BE(SAT)} (V) Max	I _C @ (A)	C _{ob} (pF) Max	f _t (MHz) Min	@ Typ	I _C (mA) Max			
BU326	# 800	375	10	75	6			1000	800	**	25	1	5	1.5 3	1.4 1.6	2.5 4		6	200		
BU326A	# 900	400	10	75	6			1000	900	**	25	1	5	1.5 3	1.4 1.6	2.5 4		6	200		
BU608	400	200	6	90	7	100	330	\$5000	400					1.0	1.5	6	10		500		
CDN055	50	50	5	50	5	200	50			25	100	2	2	1		2					
CSC1454	300	300	6	50	4	1000	300			20		1	5	1.5 3	1.4 1.6	2.5 4					
CSD200	1500	700	5	10	2.5	1000	1500	1000	1500	2.5		2	5	5	1.5	2					
CSD1168	1500	400	6	50	5			1000	1500	9	25	1	4	1	1.5	2					
CSD1168P	1500	800	5	50	5			1000	1500	9	18	1	4	1	1.5	2					
CSD1168Q	1500	800	5	50	5			1000	1500	15	25	1	4	1	1.5	2					

#NOTE: V_{CE}
 **: Typical Value
 \$: I_{CEV}

	Maximum Ratings									Electrical Characteristics (Ta=25°C, Unless Otherwise Specified)													
Type No.	V _{CB0} (V) Min	V _{CE0} (V) Min	V _{EB0} (V) Min	P _D (W) @Tc=25°C	I _C (A)	I _{CB0} (μA) Max	V _{CB} @ (V)	I _{CES} (μA) Max	V _{CE} @ (V)	h _{FE} @ Min Max	I _C & V _{CE} (A) (V)	V _{CE(SAT)} (V) & Max Min	V _{BE(SAT)} (V) Max	I _C @ (A)	C _{ob} (pF) Max	f _t (MHz) Min Typ Max	I _C (mA)						
BDX18	100	60	7	117	15			*5000	90	20 70	4 4	1.1		15		4.0	1000						
CDP055	50	50	5	50	10	200	50			25 100	2 2	1		2									
MJ2955	100	60	7	117	15			*1000	100	20 70	4 4 5 4	1.1 3		4 10		2.5	500						

*NOTE: I_{CEX}