


SENSITIVE GATE TRIACS

- GLASS PASSIVATED CHIP
- I_{GT} SPECIFIED IN FOUR QUADRANTS
- AVAILABLE IN INSULATED VERSION → BTA SERIES (INSULATING VOLTAGE 2500 V_{RMS}) OR IN UNINSULATED VERSION → BTB SERIES
- UL RECOGNIZED FOR BTA SERIES (E81734)



TO 220 AB
(Plastic)

DESCRIPTION

New range suited for applications such as phase control and static switching.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
$I_{T(RMS)}$	RMS on-state Current (360° conduction angle)	$T_C = 75\text{ °C}$	4	A
I_{TSM}	Non Repetitive Surge Peak on-state Current (T_J initial = 25 °C - Half sine wave)	$t = 8.3\text{ ms}$	52	A
		$t = 10\text{ ms}$	50	
I^2t	I^2t Value for Fusing	$t = 10\text{ ms}$	12.5	A ² s
di/dt	Critical Rate of Rise of on-state Current (1)	Repetitive $F = 50\text{ Hz}$	10	A/μs
		Non Repetitive	50	
T_{stg} T_J	Storage and Operating Junction Temperature Range		- 40 to 150 - 40 to 110	°C °C

Symbol	Parameter	BTA/BTB 04-					Unit
		200A	400A	600A	700A	800A	
V_{DRM}	Repetitive Peak off-state Voltage (2)	200	400	600	700	800	V

(1) $I_G = 250\text{ mA}$ $di/dt = 1\text{ A/μs}$

(2) $T_J = 110\text{ °C}$.

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction to Ambient	60	°C/W
$R_{th(j-c)}\text{ DC}$	Junction to Case for DC	8.7	°C/W
$R_{th(j-c)}\text{ AC}$	Junction to Case for 360 ° Conduction Angle ($F = 50\text{ Hz}$)	6.5	°C/W

February 1989

1/4

307

GATE CHARACTERISTICS (maximum values)

 $P_{GM} = 40 \text{ W}$ ($t_p = 10 \mu\text{s}$) $I_{GM} = 4 \text{ A}$ ($t_p = 10 \mu\text{s}$) $P_G(AV) = 1 \text{ W}$ $V_{GM} = 16 \text{ V}$ ($t_p = 10 \mu\text{s}$)


ELECTRICAL CHARACTERISTICS

Symbol	Test Conditions	Quadrants	Min.	Typ.	Max.	Unit
I_{GT}	$T_j = 25^\circ\text{C}$ $V_D = 12 \text{ V}$ $R_L = 33 \Omega$ Pulse Duration $> 20 \mu\text{s}$	I-II-III IV			10 25	mA
V_{GT}	$T_j = 25^\circ\text{C}$ $V_D = 12 \text{ V}$ $R_L = 33 \Omega$ Pulse Duration $> 20 \mu\text{s}$	I-II-III-IV			1.5	V
V_{GD}	$T_j = 110^\circ\text{C}$ $V_D = V_{DRM}$ $R_L = 3.3 \text{ k}\Omega$	I-II-III-IV	0.2			V
I_H^*	$T_j = 25^\circ\text{C}$ $I_T = 100 \text{ mA}$ Gate Open				25	mA
I_L	$T_j = 25^\circ\text{C}$ $V_D = 12 \text{ V}$ $I_G = 50 \text{ mA}$ Pulse Duration $> 20 \mu\text{s}$	I-III-IV II		25 50		mA
V_{TM}^*	$T_j = 25^\circ\text{C}$ $I_{TM} = 5.5 \text{ A}$ $t_p = 10 \text{ ms}$				1.65	V
I_{DRM}^*	V_{DRM} Specified $T_j = 25^\circ\text{C}$ $T_j = 110^\circ\text{C}$				0.01 0.75	mA
dv/dt^*	$T_j = 110^\circ\text{C}$ Gate Open Linear Slope up to $V_D = 67\% V_{DRM}$		10			V/ μs
$(dv/dt)_c^*$	$T_G = 75^\circ\text{C}$ $V_D = V_{DRM}$ $I_T = 5.5 \text{ A}$ $(di/dt)_c = 1.8 \text{ A/ms}$			5		V/ μs
t_{gt}	$T_j = 25^\circ\text{C}$ $V_D = V_{DRM}$ $I_T = 5.5 \text{ A}$ $I_G = 40 \text{ mA}$ $di_G/dt = 0.45 \text{ A}/\mu\text{s}$	I-II-III-IV		2		μs

* For either polarity of electrode A_2 voltage with reference to electrode A_1 .

PACKAGE MECHANICAL DATA

TO 220 AB Plastic

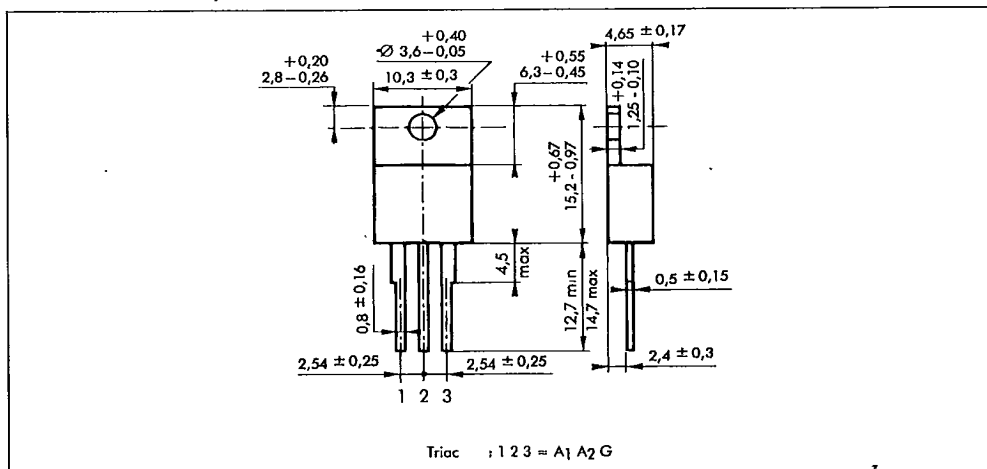

Cooling method : by conduction (method C)

Marking : type number

Weight : 2 g.

S G S-THOMSON

T-25-13

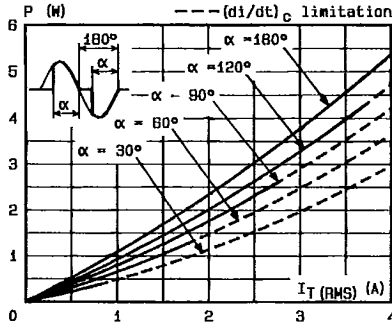


Fig.1 - Maximum mean power dissipation versus RMS on-state current ($F = 60$ Hz).

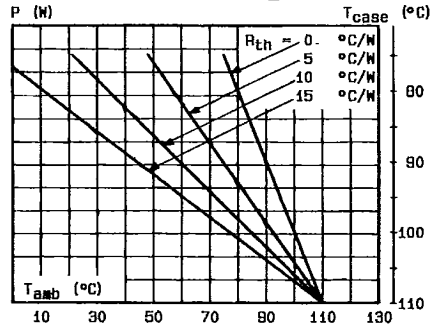


Fig.2 - Correlation between maximum mean power dissipation and maximum allowable temperatures (T_{amb} and T_{case}) for different thermal resistances heatsink + contact.

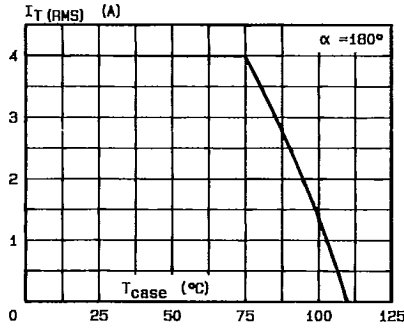


Fig.3 - RMS on-state current versus case temperature.

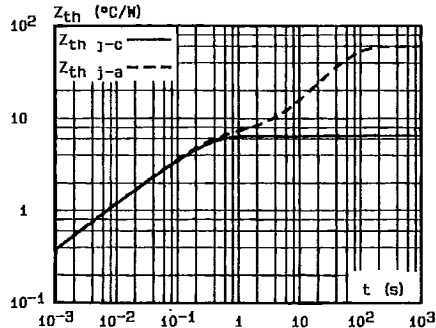


Fig.4 - Thermal transient impedance junction to case and junction to ambient versus pulse duration.

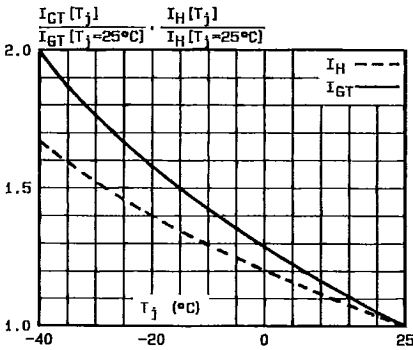


Fig.5 - Relative variation of gate trigger current and holding current versus junction temperature.

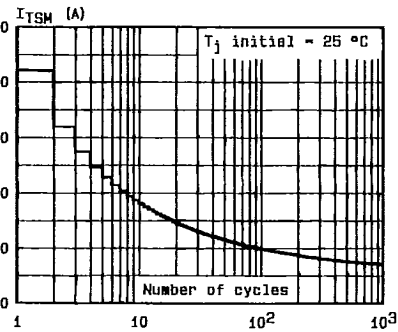


Fig.6 - Non repetitive surge peak on-state current versus number of cycles.

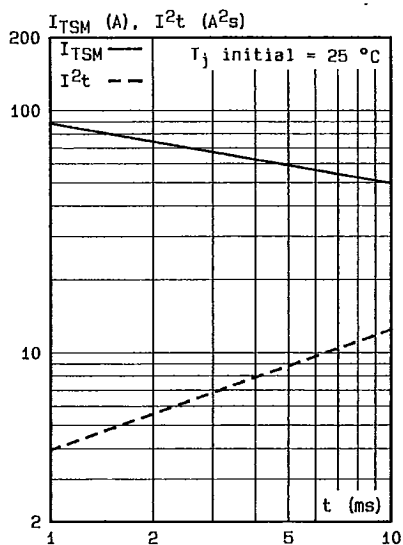


Fig.7 - Non repetitive surge peak on-state current for a sinusoidal pulse with width : $t \leq 10$ ms, and corresponding value of I^2t .

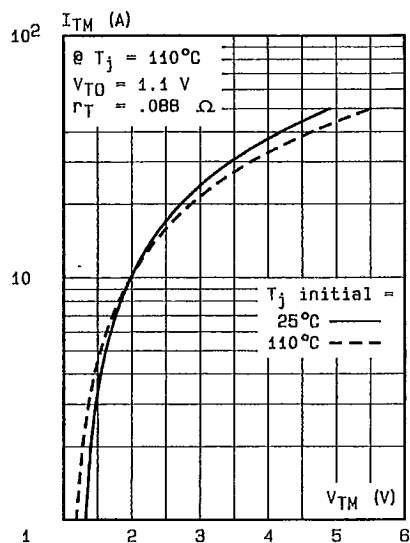


Fig.8 - On-state characteristics (maximum values).