



GaAs SP4T Absorptive Switch

DC-2 GHz

SW-411

Features

- Low Insertion Loss
- Low Power Consumption
- Fast Switching Speed, 8 ns Typ
- Very High Intercept Points

Guaranteed Specifications¹ (From -55°C to +85°C)

Frequency Range	DC - 2.0 GHz		
Insertion Loss	DC - 2.0 GHz	1.6 dB Max	
	DC - 1.0 GHz	1.4 dB Max	
	DC - 0.5 GHz	1.2 dB Max	
VSWR		Common, RF1 - RF4 On	RF1 - RF4 Off
	DC - 2.0 GHz	1.8:1 Max	1.8:1 Max
	DC - 1.0 GHz	1.6:1 Max	1.6:1 Max
	DC - 0.5 GHz	1.4:1 Max	1.4:1 Max
Isolation	DC - 2.0 GHz	40 dB Min	
	DC - 1.0 GHz	45 dB Min	
	DC - 0.5 GHz	50 dB Min	

Operating Characteristics

Impedance	50 Ohms Nominal		
Switching Characteristics			
Trise, Tfall (10% to 90% RF)	8 ns Typ		
Ton, Toff (50% CTL to 90/10% RF)	16 ns Typ		
Transients (In band)	15 mV Typ		
Output Power for 1 dB Compression			
0.5 - 2.0 GHz	+27 dBm Typ		
0.05 GHz	+21 dBm Typ		
Intermodulation Intercept Point (for two-tone input power up to +5 dBm)			
Intercept Points	IP2	IP3	
0.5 - 2.0 GHz	+60	+46	dBm Typ
0.05 GHz	+45	+35	dBm Typ


Control Voltages			
Vin Low (0)	0.0 to -0.2 V @ 20 μ A Max		
Vin High (1)	-5.0 V to -8.0 V @ 300 μ A Max		

1. All specifications apply with 50 ohm impedance to all RF ports.
2. Contact the factory for standard or custom screening.


Ordering Information

Model No.	Package
SW-411 PIN	Flatpack

FP-26

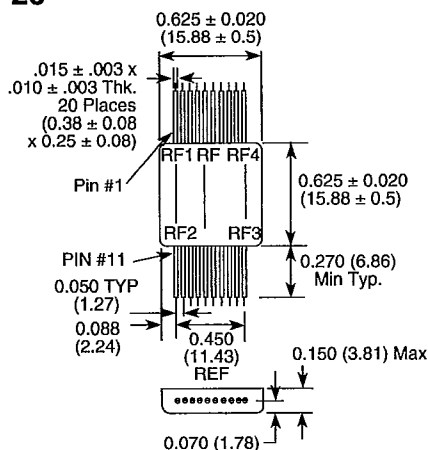

Functional Schematic (Top View)

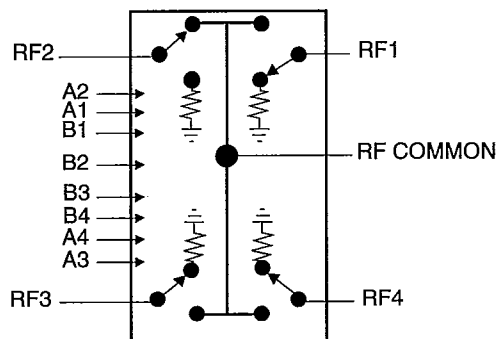

GaAs SP4T Absorptive Switch

SW-411

Absolute Maximum Ratings

Parameter	Absolute Maximum ¹
Max. Input Power	
0.05 GHz	+27 dBm
0.5 – 2.0 GHz ²	+34 dBm
Control Voltage	+5V, -8.5V
Operating Temperature	-55°C to +125°C
Storage Temperature	-65°C to +150°C

Notes: 1. Operation of this device above any one of these parameters may cause permanent damage.

2. When the RF input power is applied to the terminated port, the absolute maximum is +30 dBm.




Pin Configuration

Pin No.	Description	Pin No.	Description
1	RF1	11	RF2
2	GND	12	A2
3	GND	13	A1
4	GND	14	B1
5	RF Common	15	B2
6	GND	16	B3
7	GND	17	B4
8	GND	18	A4
9	GND	19	A3
10	RF4	20	RF3

Truth Table

Control Input								Condition of Switch RF Common to Each RF Port			
A1	B1	A2	B2	A3	B3	A4	B4	RF1	RF2	RF3	RF4
1	0	0	1	0	1	0	1	On	Off	Off	Off
0	1	1	0	0	1	0	1	Off	On	Off	Off
0	1	0	1	1	0	0	1	Off	Off	On	Off
0	1	0	1	0	1	1	0	Off	Off	Off	On

Typical Performance

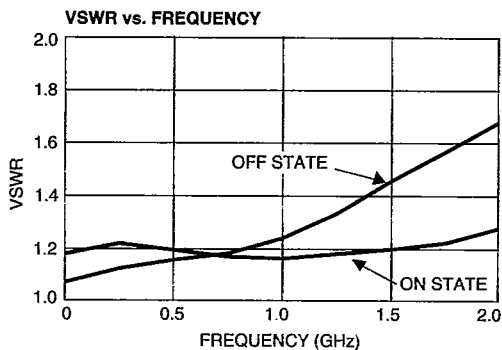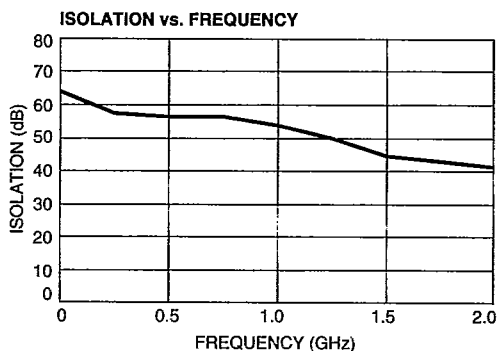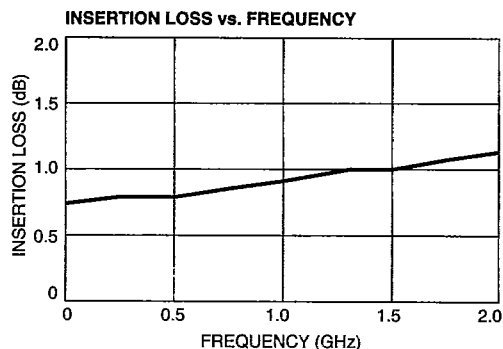

Specifications Subject to Change Without Notice

M/A-COM Inc.

1011 Pawtucket Boulevard, Lowell, MA 01853 USA

Telephone: 800-366-2266