

High Power GaAs SPDT Switch

DC - 3 GHz

SW-106, SW-276

V 2.00

Features

- +39 dBm Typ. 1 dB Compression Point, -8V Control
- +65 dBm Typ. 3rd Order Intercept, -8V Control
- Insertion Loss of 0.4 dB Typical
- Low Power Consumption
- Fast Switching Speed

Guaranteed Specifications¹

(-55°C to +85°C)

Frequency Range	DC - 3.0 GHz	SW-106	SW-276
Insertion Loss	DC - 0.5 GHz	0.5 dB	0.4 dB Max
	DC - 1.0 GHz	0.6 dB	0.5 dB Max
	DC - 2.0 GHz	0.8 dB	0.7 dB Max
	DC - 3.0 GHz	1.2 dB	1.0 dB Max
Isolation	DC - 0.5 GHz	34 dB	37 dB Min
	DC - 1.0 GHz	32 dB	31 dB Min
	DC - 2.0 GHz	20 dB	24 dB Min
	DC - 3.0 GHz	15 dB	19 dB Min
VSWR	DC - 0.5 GHz	1.3:1	1.3:1 Max
	DC - 1.0 GHz	1.5:1	1.5:1 Max
	DC - 2.0 GHz	1.5:1	1.5:1 Max
	DC - 3.0 GHz	1.6:1	1.6:1 Max

Operating Characteristics²

Impedance 50 Ohms Nominal

Switching Characteristics

Trise, Tfall (10% to 90%)	30 ns Typ
Ton, Toff (50% CTL to 90%/10% RF)	35 ns Typ
Transients (In-Band)	12 mV Typ

Input Power for Compression		0.1 dB	1.0 dB
0.9 GHz (-5V Control)	+32.5 dBm	+35.5 dBm	Typ
0.9 GHz (-8V Control)	+35.5 dBm	+39.5 dBm	Typ

Third Order Intercept Point (with two +10 dBm Input Tones)

0.9 GHz (-5V Control)	+61 dBm Typ
0.9 GHz (-8V Control)	+65 dBm Typ

Control Voltages


Vin Low	0 to -0.2V @ 20 µA Max
Vin High	-5V @ 50 µA Typ to -10V @ 800 µA Max

1. All specifications apply when operated with bias voltages of 0V for Vin Low and -5 to -10V for Vin High, and 50 ohm impedance at all RF ports, unless otherwise specified.
2. High power (greater than 1W) handling specifications apply to cold switching only. For input powers under 1W hot switching can be used.
3. Contact the factory for standard or custom screening requirements.


Ordering Information

Part Number	Package
SW-106 PIN	Surface Mount
SW-276 PIN	Ceramic


SW-106 (CR-5)

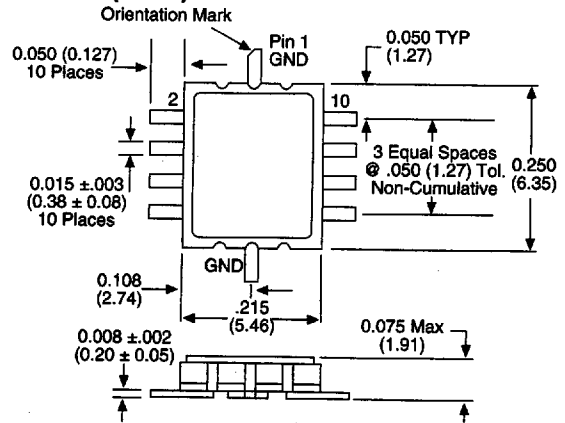

Bottom View

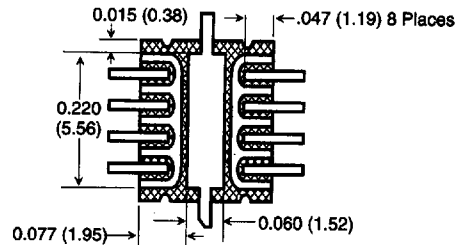

SW-276 (CR-2)

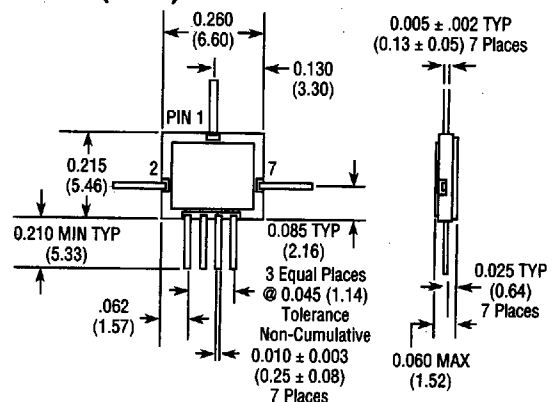

For both switches: Bottom of Case is AC Ground
Dimension in () are in mm.
Unless Otherwise Noted: .xxx ± 0.010 (.xx ± 0.25)
.xx ± 0.02 (.x ± 0.5)

Specifications Subject to Change Without Notice.

15-70

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

5642205 0002435 654


Absolute Maximum Ratings

Parameter	Absolute Maximum ¹
Max. Input Power	
0.05 GHz	+35 dBm
0.5 - 2.0 GHz	
-5V Control	+36 dBm
-8V Control	+39 dBm
-10V Control	+40 dBm
Power Dissipation ^{2,3}	2.0 W
Control Voltage	-12V, +1V
Operating Temperature	-55°C to +125°C
Storage Temperature	-65°C to +150°C
Maximum Junction Temperature	+175°C
Thermal Resistance ² : θ_{jc}	+50°C/W


1. Operation of this device above any one of these parameters may cause permanent damage.
2. $T_{case} = 25^\circ\text{C}$, where T_{case} is the temperature at the bottom of the case.
3. Special consideration must be given to the mounting of the switch to minimize the thermal resistance. The bottom of the case should be thermally attached to the mounting surface to maintain the junction temperature under the absolute maximum rating.

Functional Schematics (Top View)

SW-106



SW-276

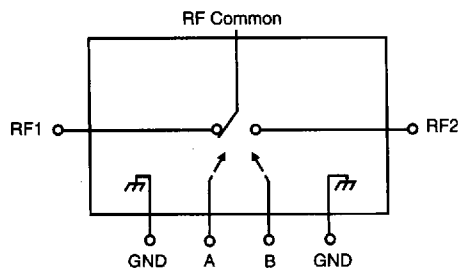
Two Tone IP_3 Measurements

Bias Voltage	Input Power for each tone (dBm)	3rd Order Intermodulation Products (dBc)	IP_3 (dBm)	Second Harmonic (dBc)
0, -5V	+27	-34	+44	-61
0, -6V	+27	-49	+51	-61
0, -7V	+27	-64	+59	-63
0, -8V	+27	-65	+59	-63
0, -5V	+28	-30	+43	-58
0, -6V	+28	-41	+48	-58
0, -7V	+28	-52	+54	-57
0, -8V	+28	-60	+58	-57
0, -5V	+29	-28	+43	-54
0, -6V	+29	-34	+46	-54
0, -7V	+29	-44	+51	-54
0, -8V	+29	-52	+55	-54
0, -5V	+30	-26	+43	-52
0, -6V	+30	-32	+46	-51
0, -7V	+30	-38	+49	-51
0, -8V	+30	-44	+52	-51

Truth Table

Control		Condition of Switch	
A	B	RF1	RF2
High	Low	On	Off
Low	High	Off	On

Typical Performance

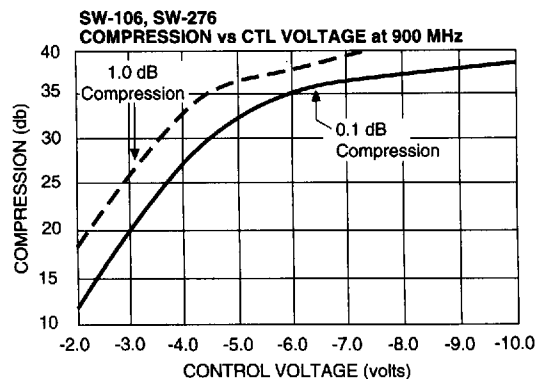

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

15-71

North America: Tel. (800) 366-2266
Fax (800) 618-8883


Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020


5642205 0002436 590

Typical Performances (cont'd.)


SW-106 INSERTION LOSS vs. FREQUENCY

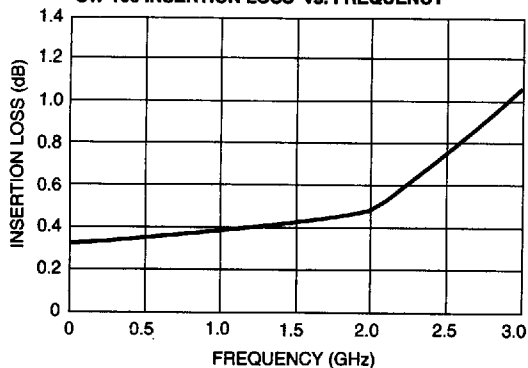


SW-276 INSERTION LOSS vs. FREQUENCY

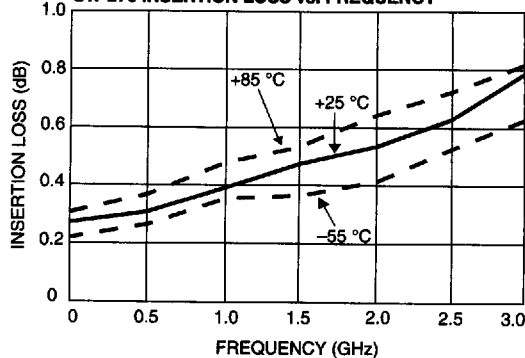


SW-106 ISOLATION vs. FREQUENCY

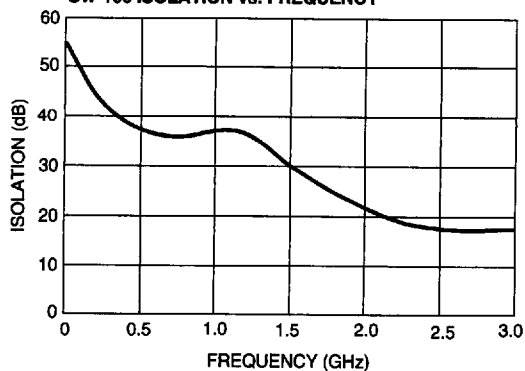


SW-276 ISOLATION vs. FREQUENCY

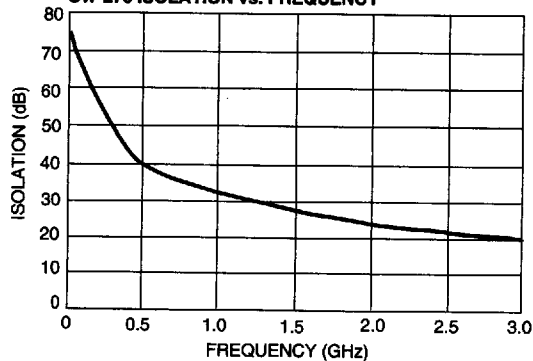

SW-106 VSWR vs. FREQUENCY

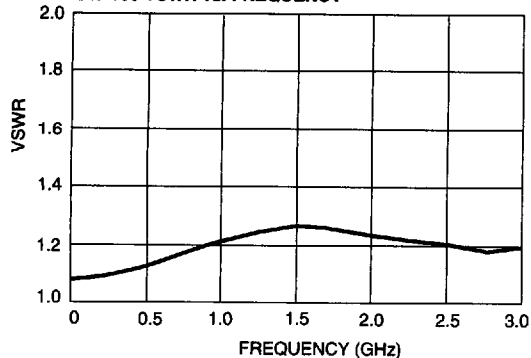

SW-276 VSWR vs. FREQUENCY

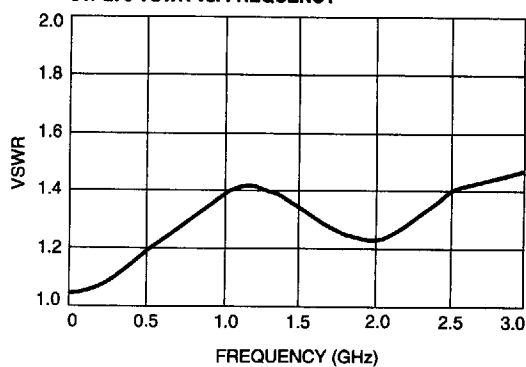

Specifications Subject to Change Without Notice.

15-72

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

5642205 0002437 427