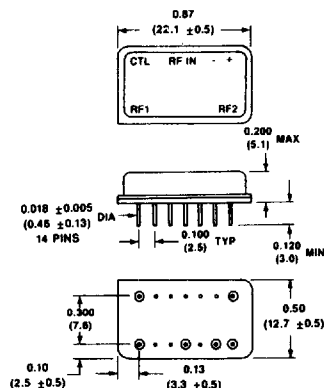


SW-205/206

- (From -55°C to $+85^{\circ}\text{C}$)**

DI-1

(POSITIVE VOLTAGE ONLY SW-205 & 206, 207 & 208)

See Appendix for MIL-STD-883 screening option.


*All specifications apply when operated with bias voltages of +5 VDC (SW-205) or +8 VDC (SW-206) and 50 ohm impedance at all RF ports.

Specifications Subject to Change Without Notice.


M/A-COM Inc. ■ 1011 Pawtucket Boulevard, Lowell, MA 01853 USA

Telephone: 800-366-2266

Typical Performance

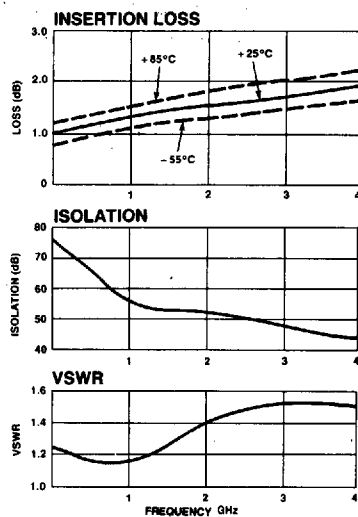

Schematic

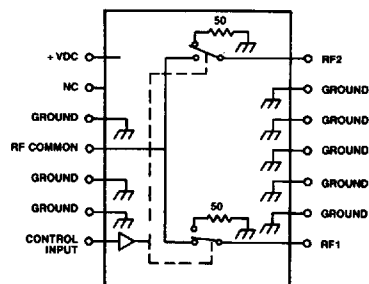

Truth Table

Control Input	Condition Of Switch
1 ¹ = Logic High	RF Common To
TTL (SW-205)/CMOS (SW-206)	Each RF Port
0	RF1 RF2
1	ON OFF

Specifications Subject to Change Without Notice.