

697-023 to 697-205




Dimensions for the STL... Transformers

Transformers and Chokes

Transformers

STI single-phase control transformers

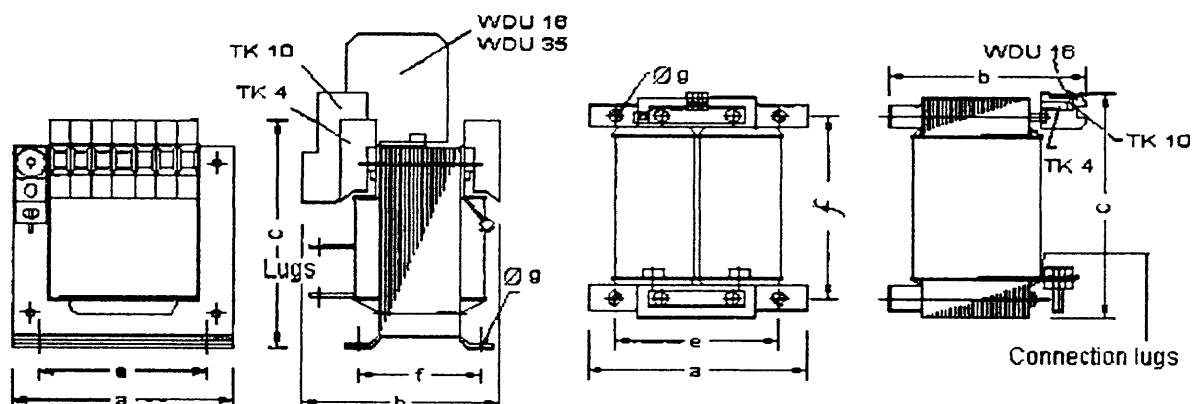

STI 0,06 to STI 4,0 (Secondary voltage 230/400 V and above)

Type															Rating	Total weight	
	12 V			24 V		42 V		110 V		230 V							
	a	b	c	b	c	b	c	b	c	b	c	e	f	g	VA	kg	
STI 0,08	95	77	97	77	97	77	97	77	97	77	97	84	47	4,8	80	1,5	
STI 0,1	95	91	97	91	97	91	97	91	97	91	97	84	61	4,8	100	2	
STI 0,18	95	118	103	100	97	100	97	100	97	100	97	84	70	4,8	180	2,3	
STI 0,2	100	103	124	85	108	85	108	85	108	85	108	80	81	5,8	200	3	
STI 0,25	106	112	124	112	124	94	108	94	108	94	108	80	70	5,8	250	3,8	
STI 0,315	121	107	131	107	131	89	115	89	115	89	115	90	68	5,8	315	4,3	
STI 0,4	121	-	-	119	131	101	115	101	115	101	115	90	80	5,8	400	5,2	
STI 0,5	121	-	-	139	131	139	131	121	115	121	115	90	100	5,8	600	6,8	
STI 0,83	151	-	-	108	211	121	157	108	141	108	141	122	82	7	830	7,7	
STI 0,8	151	-	-	125	211	138	157	125	141	125	141	122	98	7	800	9,6	
STI 1,0	151	-	-	151	211	184	157	151	141	151	141	122	125	7	1000	13,4	
STI 1,3	175	-	-	141	223	141	223	150	189	141	153	135	114	7	1300	14,9	
STI 1,6	185	-	-	192	170	152	240	158	186	152	170	150	110	11	1600	17,4	
STI 2,0	195	-	-	195	170	154	240	180	188	154	170	150	122	11	2000	21,5	
STI 2,5	195	-	-	195	170	154	240	180	188	160	188	150	122	11	2500	21,5	
STI 3,0	230	-	-	200	275	200	275	240	290	185	295	190	200	11	3000	26	
STI 4,0	230	-	-	225	275	225	275	285	290	210	295	190	200	11	4000	35	