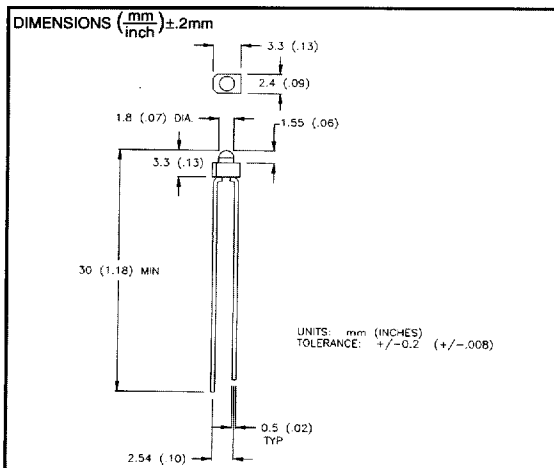

SSL-LX20333XX SERIES T-1.8mm STOVE PIPE LENS LED LAMP

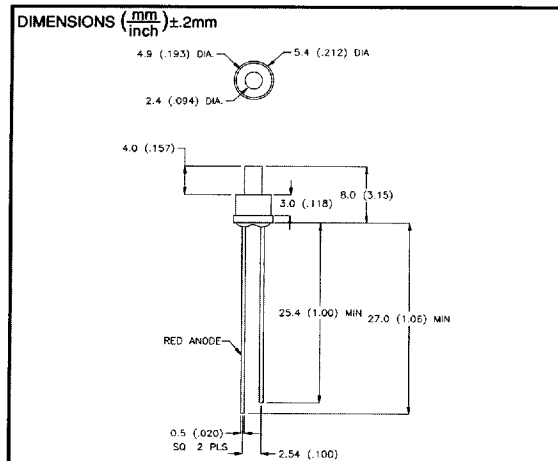
FEATURES			APPLICATIONS			OPTIONS AVAILABLE		
- Four Color Options - Bi-Color Version - Long Life/Low Power - Stove Pipe Lens			- Panel Indicators - Status Illumination - Switches/Keyboards - PCB Indicators			- Add-on Spacers - Add-on Leads		
LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	EPOXY LENS COLOR	BRIGHTNESS TYP.(mcd.)	IF(mA)	VIEW ANGLE	VF@20mA	
SSL-LX20333ID	RED	635	RED DIFF.	6	20	80	2.0	2.8
SSL-LX20333SRD	RED	660	RED DIFF.	28	20	80	1.7	2.2
SSL-LX20333GD	GREEN	565	GREEN DIFF.	6	20	80	2.1	2.8
SSL-LX20333YD	YELLOW	585	YELLOW DIFF.	6	20	80	2.1	2.8
BI-COLOR OPTIONS								
SSL-LX20333HGW	RED/GREEN	695/565	WHITE DIFF.	3/3	20/20	80	2.0	2.8

See pages 8 -14 for Max. operating limits and operating curves


SSL-LX20583XX SERIES T-2mm STOVE PIPE LENS LED LAMP

FEATURES			APPLICATIONS			OPTIONS AVAILABLE		
- Four Color Options - Bi-Color Version - Long Life/Low Power - Stove Pipe Lens			- Panel Indicators - Status Illumination - Point Light Sources			- Add-on Spacers - Add-on Leads		
LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	EPOXY LENS COLOR	BRIGHTNESS TYP.(mcd.)	IF(mA)	VIEW ANGLE	VF@20mA	
SSL-LX20583ID-FT	RED	635	RED DIFF.	7	20	80	2.0	2.8
SSL-LX20583SRD-FT	RED	660	RED DIFF.	30	20	80	1.7	2.2
SSL-LX20583GD-FT	GREEN	565	GREEN DIFF.	7	20	80	2.1	2.8
SSL-LX20583YD-FT	YELLOW	585	YELLOW DIFF.	7	20	80	2.1	2.8
BI-COLOR OPTIONS								
SSL-LX20583HGW-FT	RED/GREEN	695/565	WHITE DIFF.	3/3	20/20	80	2.0	2.8

See pages 8 -14 for Max. operating limits and operating curves


SSL-LX3054XX SERIES T-3mm, 25mm LEAD LED LAMPS

FEATURES			APPLICATIONS			OPTIONS AVAILABLE		
- Color Choices - Lens Choices - Bi-Color Options - Low Current Options			- Indicators - Switches/Keyboards - Backlighting Sources			- Add-on Leads - Add-on Spacers - Panel Mount Clips - Reflectors		
LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	EPOXY LENS COLOR	BRIGHTNESS TYP.(mcd.)	IF(mA)	VIEW ANGLE	VF@20mA	
SSL-LX3054ID	RED	635	RED DIFF.	10.0	20	80	2.0	2.8
SSL-LX3054IT	RED	635	RED TRANSP.	30.0	20	20	2.0	2.8
SSL-LX305 GD	GREEN	565	GREEN DIFF.	8.0	20	80	2.1	2.8
SSL-LX3054GT	GREEN	565	GREEN TRANSP.	25.0	20	20	2.1	2.8
SSL-LX3054YD	YELLOW	585	YELLOW DIFF.	8.0	20	80	2.1	2.8
SSL-LX3054YT	YELLOW	585	YELLOW TRANSP.	20.0	20	20	2.1	2.8
LOW CURRENT (2mA)								
SSL-LX3054LID	RED	635	RED DIFF.	1.0	2	80	2.0	2.8
SSL-LX3054LGD	GREEN	565	GREEN DIFF.	1.0	2	80	2.1	2.8
SSL-LX3054LYD	YELLOW	585	YELLOW DIFF.	1.0	2	80	2.1	2.8
BI-COLOR DEVICES								
SSL-LX3054IGW	RED/GREEN	635/565	WHITE DIFF.	5/4	20	80	2.0	2.8

See pages 8 -14 for Max. operating limits and operational curves

