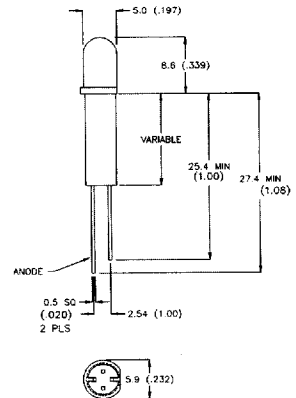

SSS-LX5093XX SERIES T-5mm LAMPS WITH ATTACHED SPACERS

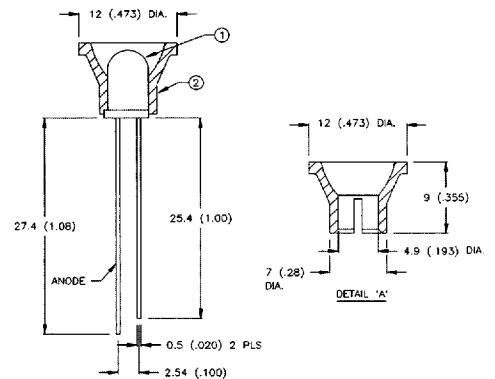
LUMEX PART NBR	EMITTED COLOR		EPOXY	BRIGHTNESS		VIEW	Vf @ 20mA	
	PEAK(nm)			TYP.(mcd.)	I(mA)	ANGLE	TYP.	MAX
SSS-LX5093ID-	RED	635	RED DIFF.		20	80	2.0	2.8
SSS-LX5093IT-	RED	635	RED TRANSP.		20	25	2.0	2.8
SSS-LX5093SRD-	RED	660	RED DIFF.		20	80	1.7	2.8
SSS-LX5093SRT-	RED	660	RED TRANSP.		20	25	1.7	2.8
SSS-LX5093GD-	GREEN	565	GREEN DIFF.		20	80	2.1	2.8
SSS-LX5093GT-	GREEN	665	GREEN TRANSP.		20	25	2.1	2.8
SSS-LX5093YD-	YELLOW	585	YELLOW DIFF.		20	8	2.1	2.8
SSS-LX5093YT-	YELLOW	585	YELLOW TRANSP.		20	25	2.1	2.8
HI-COLOR OPTIONS								
SSS-LX5093IGW-	RED/GREEN	635-565	WHITE DIFF.		20/20	80	2.0	2.8
LOW CURRENT OPTIONS (OTHER COLORS AVAILABLE)								
SSS-LX5093LID-	RED	635	RED DIFF.		2	80	1.9	2.7

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm

SSI-LXR5093XX SERIES T-5 LEDs WITH EXTERNAL REFLECTORS

LUMEX PART NBR	EMITTED COLOR		EPOXY	BRIGHTNESS		VIEW	Vf @ 20mA	
	PEAK(nm)			TYP.(mcd.)	I(mA)	ANGLE	TYP.	MAX
SSI-LXR5093XX	RED	635	RED DIFF.	30	20	80	2.0	2.8
SSI-LXR5093SRD	RED	660	RED DIFF.	100	20	80	1.7	2.2
SSI-LXR5093GD	GREEN	565	GREEN DIFF.	30	20	80	2.1	2.8
SSI-LXR5093YD	YELLOW	585	YELLOW DIFF.	30	20	80	2.1	2.8
BI-COLOR OPTIONS								
SSI-LXR5093HGWH	RED/GREEN	695/565	WHITE DIFF.	20/20	20/20	80	2.0	2.8

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm

SSL-LX509F3XX SERIES T-5 FLANGELESS LED LAMPS

LUMEX PART NBR	EMITTED COLOR		EPOXY	BRIGHTNESS		VIEW	Vf @ 20mA	
	PEAK(nm)			TYP.(mcd.)	I(mA)	ANGLE	TYP.	MAX
SSL-LX509F3ID	RED	635	RED DIFF.	20	20	80	2.0	2.8
SSL-LX509F3IT	RED	635	RED TRANSP.	120	20	25	2.0	2.8
SSL-LX509F3SRD	RED	660	RED DIFF.	250	20	80	1.7	2.2
SSL-LX509F3SRT	RED	660	RED TRANSP.	400	20	25	1.7	2.2
SSL-LX509F3GD	GREEN	565	GREEN DIFF.	20	20	80	2.1	2.8
SSL-LX509F3GT	GREEN	565	GREEN TRANSP.	100	20	25	2.1	2.8
SSL-LX509F3YD	YELLOW	585	YELLOW DIFF.	20	20	80	2.1	2.8
SSL-LX509F3YT	YELLOW	585	YELLOW TRANSP.	100	20	25	2.1	2.8
BI-COLOR OPTIONS								
SSL-LX509F3IGW	RED/GREEN	635/565	WHITE DIFF.	12/12	20/20	80	2.0	2.8
LOW CURRENT OPTIONS (OTHER COLORS AVAILABLE)								
SSL-LX509F3LID	RED	635	RED DIFF.	2.0	2	80	1.9	2.7

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm
