


SSI-LXR3816 SERIES T-5mm METAL BEZEL LED INDICATORS

- | | | |
|--|--|---|
| FEATURES <ul style="list-style-type: none"> • Easy Panel Installation • Brass Housing • Choice of Colors • Lead Lengths Optional • Optional Black Anodize Finish | APPLICATIONS <ul style="list-style-type: none"> • Panel Indicators • Status Indicators • Instrument Indicators • Annunciators | MATERIAL SPECIFICATIONS <ul style="list-style-type: none"> • Holder: Brass/Chrome Finish • Termination: Pins or Insulated • (6") 24AWG Leads (-150) • Installation: 5/16" Panel Hole |
|--|--|---|

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
	PEAK(nm)				TYP (mCD) @	mA	
SSI-LXR3816ID-150	RED	635	10-25	2.1	15	20	SSL-LX5093XX
SSI-LXR3816SRD-150	RED	660	10-25	1.7	75	20	SSL-LX5093XX
SSI-LXR3816GD-150	GREEN	565	10-25	2.1	15	20	SSL-LX5093XX
SSI-LXR3816YD-150	YELLOW	585	10-25	2.1	15	20	SSL-LX5093XX
BI-COLOR OPTION							
SSI-LXR3816GHW-150	RED/GREEN	695/565	10-25	2.1	8/8	20	SSL-LX5093HGW
FIXED VOLTAGE OPTIONS							
SSI-LXR3816ID-5V-150	RED	635	20 max.	5.0	12	5V	SSL-LX5093XX-5V
SSI-LXR3816GD-5V-150	GREEN	565	20 max.	5.0	12	5V	SSL-LX5093XX-5V
SSI-LXR3816YD-5V-150	YELLOW	585	20 max.	5.0	12	5V	SSL-LX5093XX-5V
BLINKING OPTION							
SSI-LXR3816ID-150	RED	635	10-20	3-15V	8	9V	SSL-LX5093BXX

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm

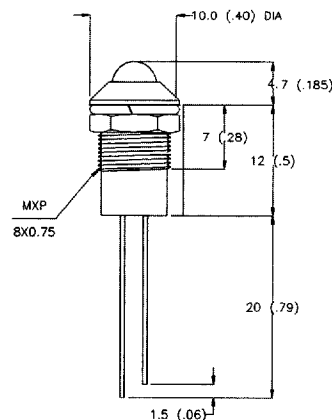


SSI-LXR5010 SERIES T-5mm BLACK BEZEL LED INDICATORS

- | | | |
|--|--|---|
| FEATURES <ul style="list-style-type: none"> • Easy Panel Installation • Attractive Bezel • Choice of Colors • Lead Lengths Optional | APPLICATIONS <ul style="list-style-type: none"> • Panel Indicators • Status Indicators • Instrument Indicators • Annunciators | MATERIAL SPECIFICATIONS <ul style="list-style-type: none"> • Holder: Black ABS • Termination: Pins or Insulated Leads (-150) • Installation: 5/16" Panel Hole |
|--|--|---|

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
	PEAK(nm)				TYP (mCD) @	mA	
SSI-LXR5010ID/-150	RED	635	10-25	2.1	16	20	SSL-LX5093XX
SSI-LXR5010RD/-150	RED	660	10-25	1.7	70	20	SSL-LX5093XX
SSI-LXR5010GD/-150	GREEN	565	10-25	2.1	16	20	SSL-LX5093XX
SSI-LXR5010YD/-150	YELLOW	585	10-25	2.1	16	20	SSL-LX5093XX
BI-COLOR OPTION							
SSI-LXR 5010HGW/-150	RED/GREEN	695/565	10-25	2.1	8/8	20	SSL-LX5093HGW
FIXED VOLTAGE OPTIONS							
SSI-LXR5010ID-5V/-150	RED	635	20 max.	5.0	12	5V	SSL-LX5093XX-5V
SSI-LXR5010GD-5V/-150	GREEN	565	20 max.	5.0	12	5V	SSL-LX5093XX-5V
SSI-LXR5010YD-5V/-150	YELLOW	585	20 max.	5.0	12	5V	SSL-LX5093XX-5V
BLINKING OPTION							
SSI-LXR5010ID/-150	RED	635	10-20	3-15V	8	9V	SSL-LX5093BXX

See pages 8 -14 for Max.operating limits and operating curves

DIMENSIONS (mm) ±.2mm

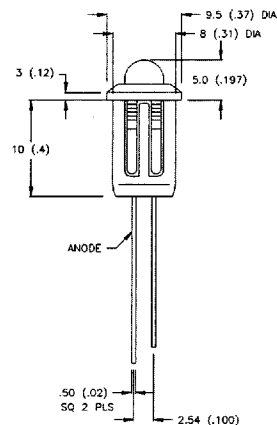

SSI-LXR5020 SERIES T-5mm BLACK BEZEL LED INDICATORS

- | | | |
|--|--|---|
| FEATURES <ul style="list-style-type: none"> • Easy Panel Installation • Attractive Bezel • Choice of Colors • Lead Lengths Optional | APPLICATIONS <ul style="list-style-type: none"> • Panel Indicators • Status Indicators • Instrument Indicators • Annunciators | MATERIAL SPECIFICATIONS <ul style="list-style-type: none"> • Holder: Black ABS • Termination: Pins or Insulated Leads (-150) • Installation: 5/16" Panel Hole |
|--|--|---|

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
	PEAK(nm)				TYP (mCD) @	mA	
SSI-LXR5020ID/-150	RED	635	10-25	2.1	16	20	SSL-LX5093XX
SSI-LXR5020SRD/-150	RED	660	10-25	1.7	70	20	SSL-LX5093XX
SSI-LXR5020GD/-150	GREEN	565	10-25	2.1	16	20	SSL-LX5093XX
SSI-LXR5020YD/-150	YELLOW	585	10-25	2.1	16	20	SSL-LX5093XX
BI-COLOR OPTION							
SSI-LXR 5020HGW/-150	RED/GREEN	695/565	10-25	2.1	8/8	20	SSL-LX5 093HGW
FIXED VOLTAGE OPTIONS							
SSI-LXR5020ID-5V/-150	RED	635	20 max.	5.0	12	5V	SSL-LX5093XX-5V
SSI-LXR5020GD-5V/-150	GREEN	565	20 max.	5.0	12	5V	SSL-LX5093XX-5V
SSI-LXR5020YD-5V/-150	YELLOW	585	20 max.	5.0	12	5V	SSL-LX5093XX-5V
BLINKING OPTION							
SSI-LXR5020ID/-150	RED	635	10-20	3-15V	8	9V	SSL-LX5093BXX

See pages 8 -14 for Max.operating limits and operating curves

DIMENSIONS (mm) ±.2mm

