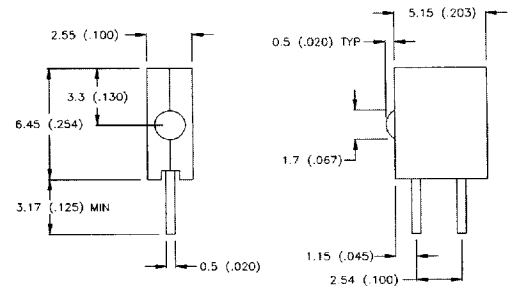

SSF-LXH555-2000 SERIES
P.C.B. MICRO-MINI LEDS

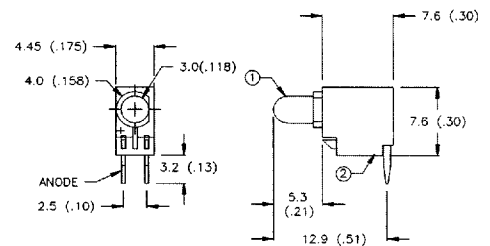
FEATURES		APPLICATIONS		MATERIAL SPECIFICATIONS		
- Dialight 555 Compatible - Very Small Size - Stackable Package		- Logic Status Indicator - Fault Indicator		- Holder: 94V-O Nylon - Terminals: 7x.25 [] Leads		
LUMEX PART NBR	EMITTED COLOR	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @	LED SERIES USED	
SSF-LXH555-2001RD	RED	655	10-25	1.8	5	20 SSL-LXA223XX
SSF-LXH555-2101ID	RED	635	10-25	2.1	10	20 SSL-LXA223XX
SSF-LXH555-2301GD	GREEN	565	10-25	2.1	10	20 SSL-LXA223XX
SSF-LXH555-2401YD	YELLOW	585	10-25	2.1	10	20 SSL-LXA223XX

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSF-LXH4RAXX SERIES
P.C. LED T-3 RELAMPABLE

FEATURES		APPLICATIONS		MATERIAL SPECIFICATIONS		
- Easy P.C. Installation - LEDs are Removable - Choice of Colors - Blinking Type Option		- P.C. Mount Indicator - Back Lighting Indicator		- Holder: Grey Polycarbonate - Termination: Tinned Copper - Installation: P.C. Mount/Solder		
LUMEX PART NBR	EMITTED COLOR	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @	LED SERIES USED	
SSF-LXH4RA ID	RED	635	10-25	2.1	12	20 SSL-LX3054XX
SSF-LXH4RASRD	RED	660	10-25	1.7	100	20 SSL-LX3054XX
SSF-LXH4RAGD	GREEN	565	10-25	2.1	18	20 SSL-LX3054XX
SSF-LXH4RAYD	YELLOW	585	10-25	2.1	18	20 SSL-LX3054XX
BI-COLOR OPTION	RED/GREEN	695/565	10-25	2.1	8/12	20 SSL-LX3054HGW
BLINKING OPTION	RED	635	10-20	3-15V	8	9V SSL-LX3054BID

See pages 8 -14 for Max.operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSI-LXR1612 SERIES
PANEL MOUNT T-3mm LEDS

FEATURES		APPLICATIONS		MATERIAL SPECIFICATIONS		
- Easy Panel Installation - Chrome Plated Metal Holder - Choice of Colors - Lead Lengths Optional		- Panel Indicators - Status Indicators - Function Status		- Holder: Chrome Brass - Termination: Pins or Insulated Lead (-150) - Installation: 1/4" Panel Hole		
LUMEX PART NBR	EMITTED COLOR	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @	LED SERIES USED	
SSI-LXR1612ID/-150	RED	635	10-25	2.1	20	20 SSL-LX3054XX
SSI-LXR1612SRD/-150	RED	660	10-25	1.7	70	20 SSL-LX3054XX
SSI-LXR1612GD/-150	GREEN	565	10-25	2.1	20	20 SSL-LX3054XX
SSI-LXR1612YD/-150	YELLOW	585	10-25	2.1	20	20 SSL-LX3054XX
BI-COLOR OPTION	RED/GREEN	695/565	10-25	2.1	7/7	20 SSL-LX3054HGW
FIXED VOLTAGE OPTION AVAILABLE (2.0/5.0/14.0 VOLTS D.C.)						
SSI-LXR1612ID-5V/-150	RED	635	20 max.	5.0	12	5V SSL-LX3054XX5V
SSI-LXR1612GD-5V/-150	GREEN	565	20 max.	5.0	12	5V SSL-LX3054XX5V
SSI-LXR1612YD-5V/-150	YELLOW	585	20 max.	5.0	12	5V SSL-LX3054XX5V
BLINKING OPTION	RED	635	10-20	3-15V	8	9V SSL-LX3054BID

See pages 8 -14 for Max.operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm
