
SSI-LXH8080XX SERIES JUMBO 8x8mm PANEL INDICATOR

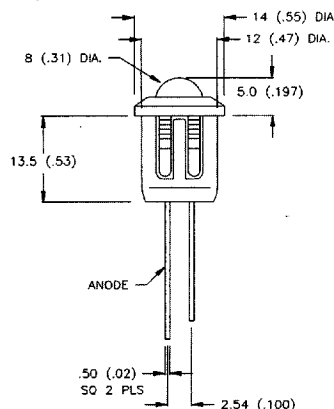
- | | | |
|--|---|---|
| FEATURES
<ul style="list-style-type: none"> • Easy Installation • High Contrast Holder • Four Color Options • Bi-Color, Blinking Version | APPLICATIONS
<ul style="list-style-type: none"> • Front Panel Indicators • Status Annunciators • Go-No Go Condition Indicators | MATERIAL SPECIFICATIONS
<ul style="list-style-type: none"> • Holder: Black ABS • Termination: 0.5mm □ Leads • Insulated Leads Available • Installation: Panel Mount |
|--|---|---|

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
	PEAK(nm)				TYP (mCD) @	mA	
SSI-LXH8080ID	RED	635	10-25	2.1	15	20	SSL-LX80113XX
SSI-LXH8080SRD	RED	660	10-25	1.7	40	20	SSL-LX80113XX
SSI-LXH8080GD	GREEN	565	10-25	2.1	15	20	SSL-LX80113XX
SSI-LXH8080YD	YELLOW	585	10-25	2.1	15	20	SSL-LX80113XX
BI-COLOR OPTION							
SSI-LXH8080HGW	RED/GREEN	695/565	10-25	2.1		20	SSL-LX80113HGW
BLINKING OPTION							
SSI-LXH8080BID	RED	635	10-20	3-15V	8	9V	SSL-LX80113BID

INSULATED LEAD OPTIONS ADD -150 TO PART NBR (6" LENGTH)

See pages 8 - 14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm
inch

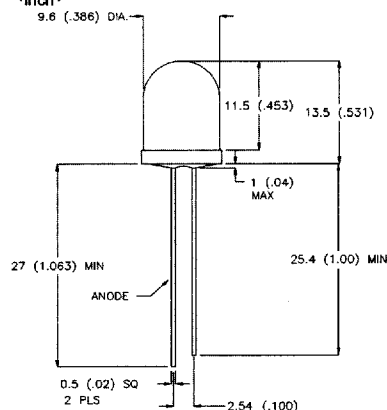

SSL-LX100133XX SERIES JUMBO 10mm ROUND LEDS

- | | | |
|--|--|---|
| FEATURES
<ul style="list-style-type: none"> • Four Color Options • Bi-Color Version • Long Life/Low Power | APPLICATIONS
<ul style="list-style-type: none"> • Panel Indicators • Status Illumination • Switches/Keyboards • Information Displays | OPTIONS AVAILABLE
<ul style="list-style-type: none"> • Add-on Spacers • Add-on Leads • Panel Mounting Hardware |
|--|--|---|

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS TYP.(mcd)	VIEW ANGLE	VIEW @20mA	
	PEAK(nm)					TYP.	MAX
SSL-LX100133ID	RED	635	RED DIFF.	10	20	80	2.8
SSL-LX100133SRD	RED	660	RED DIFF.	30	20	80	2.2
SSL-LX100133GD	GREEN	565	GREEN DIFF.	10	20	80	2.1
SSL-LX100133YD	YELLOW	585	YELLOW DIFF.	10	20	80	2.1
BI-COLOR OPTIONS							
SSL-LX100133HGW	RED/GREEN	695/565	WHITE DIFF.	6/6	20/20	80	2.0
BLINKING OPTIONS							
SSL-LX100133BID	RED	635	RED DIFF.	12	@9V	80	3-15V

See pages 8 - 14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm
inch


SSI-LXH1090XX SERIES JUMBO 10mm PANEL INDICATOR

- | | | |
|--|--|---|
| FEATURES
<ul style="list-style-type: none"> • Easy Installation • High Contrast Holder • Four Color Options • Bi-Color, Blinking Version | APPLICATIONS
<ul style="list-style-type: none"> • Front Panel Indicators • Status Annunciators • Go-No Go Condition Indicators • Dot Matrix Displays | MATERIAL SPECIFICATIONS
<ul style="list-style-type: none"> • Holder: Black ABS • Termination: 0.5mm □ Leads • Insulated Leads Available • Installation: Panel Mount |
|--|--|---|

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
	PEAK(nm)				TYP (mCD) @	mA	
SSI-LXH1090ID	RED	635	10-25	2.1	10	20	SSL-LX100133XX
SSI-LXH1090SRD	RED	660	10-25	1.7	30	20	SSL-LX100133XX
SSI-LXH1090GD	GREEN	565	10-25	2.1	10	20	SSL-LX100133XX
SSI-LXH1090YD	YELLOW	585	10-25	2.1	10	20	SSL-LX100133XX
BI-COLOR OPTION							
SSI-LXH1090HGW	RED/GREEN	695/565	10-25	2.1	6/6	20	SSL-LX100133HGW
BLINKING OPTION							
SSI-LXH1090BID	RED	635	10-20	3-15V	8	9V	SSL-LX100133BID

INSULATED LEAD OPTIONS ADD -150 TO PART NBR (6" LENGTH)

See pages 8 - 14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm
inch

