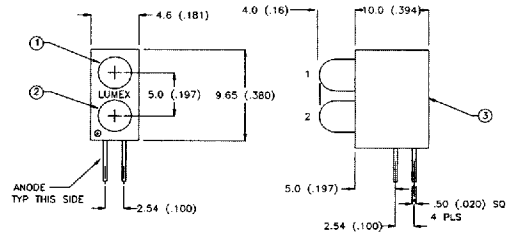

SSF-LXH2103 SERIES
P.C. LED DUAL PIGGY BACK UNIT

- | | | |
|---|--|---|
| FEATURES <ul style="list-style-type: none"> • Easy P.C. Installation • Dual Piggy Back Unit • Choice of Colors, Current • Blinking Type Option | APPLICATIONS <ul style="list-style-type: none"> • P.C. Mount Indicator • Fault Indicator • Back Lighting Indicator | MATERIAL SPECIFICATIONS <ul style="list-style-type: none"> • Holder: Black Nylon • Termination: 0.5mm □ Leads • Installation: P.C. Mount/Solder |
|---|--|---|

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
					TYP (mCD) @	mA	
SSF-LXH2103IID	RED	635	10-25	2.1	8/8	20	SSL-LX3054XX
SSF-LXH2103SRSD	RED	660	10-25	1.7	30/30	20	SSL-LX3054XX
SSF-LXH2103GGD	GREEN	565	10-25	2.1	8/8	20	SSL-LX3054XX
SSF-LXH2103YYD	YELLOW	585	10-25	2.1	8/8	20	SSL-LX3054XX
LOW CURRENT OPTIONS							
SSF-LXH2103LIID	RED	635	1-5	1.8	1/1	2	SSL-LX3054LXX
SSF-LXH2103LGGD	GREEN	565	1-5	1.8	1/1	2	SSL-LX3054LXX
SSF-LXH2103LYYD	YELLOW	585	1-5	1.8	1/1	2	SSL-LX3054LXX

COLOR COMBINATION OPTIONS AVAILABLE

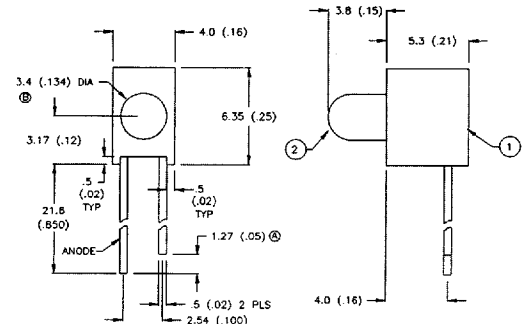
See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm
inch

SSF-LXH303 SERIES
SHORT T-3 P.C.B. LED

- | | | |
|--|--|--|
| FEATURES <ul style="list-style-type: none"> • Easy P.C. Installation • Short (3.17) Led Height • Choice of Colors, Current | APPLICATIONS <ul style="list-style-type: none"> • Status Indicator • Fault Indicator • Back Lighting | MATERIAL SPECIFICATIONS <ul style="list-style-type: none"> • Holder: 94V-O Nylon • Termination: 0.5mm □ Leads • Installation: Through Hole PCB |
|--|--|--|

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
					TYP (mCD) @	mA	
SSF-LXH303GD	GREEN	565	10-20	2.1	15	20	SSL-LX30FT4XX
SSF-LXH303ID	RED	635	10-20	2.1	15	20	SSL-LX30FT4XX
SSF-LXH303SRD	RED	660	10-20	1.7	35	20	SSL-LX30FT4XX
SSF-LXH303YD	YELLOW	585	10-20	2.1	15	20	SSL-LX30FT4XX
LOW CURRENT OPTIONS							
SSF-LXH303LGD	GREEN	565	1-5	1.8	1.0 Min.	2	SSL-LX30FT4LXX
SSF-LXH303LID	RED	635	1-5	1.8	1.0 Min.	2	SSL-LX30FT4LXX
SSF-LXH303LYD	YELLOW	585	1-5	1.8	1.0 Min.	2	SSL-LX30FT4LXX

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm
inch

SSF-LXH240XX SERIES
P.C.B. DUAL TOWER LED

- | | | |
|---|--|--|
| FEATURES <ul style="list-style-type: none"> • Easy P.C.B. Installation • Dual Level Holder • Choice of Colors, Current • Low Current Options | APPLICATIONS <ul style="list-style-type: none"> • Status Indicators • Status Indicator • Back Lighting | MATERIAL SPECIFICATIONS <ul style="list-style-type: none"> • Holder: 94V-O Nylon • Termination: 0.5mm □ Leads |
|---|--|--|

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
					TYP (mCD) @	mA	
SSF-LXH240GGD	GREEN	565	10-25	2.1	15	20	SSL-LX3044XX
SSF-LXH240IID	RED	635	10-25	2.1	15	20	SSL-LX3044XX
SSF-LXH240SRSD	RED	660	10-25	1.7	80	20	SSL-LX3044XX
SSF-LXH240YYD	YELLOW	585	10-25	2.1	15	20	SSL-LX3044XX
LOW CURRENT OPTIONS							
SSF-LXH240LGGD	GREEN	565	1-5	1.8	1 Min.	2	SSL-LX3044LXX
SSF-LXH240LIID	RED	635	1-5	1.8	1 Min.	2	SSL-LX3044LXX
SSF-LXH240LYYD	YELLOW	585	1-5	1.8	1 Min.	2	SSL-LX3044LXX

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm
inch
