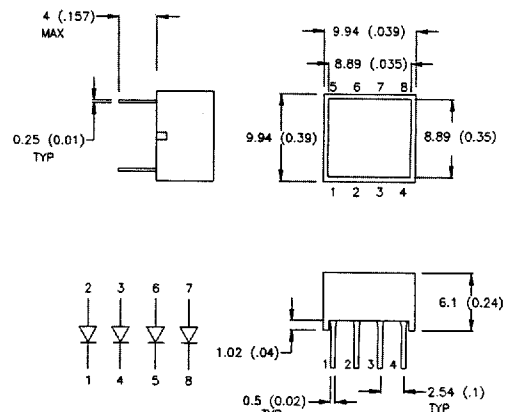

SSB-LX2X55 SERIES
10x10mm (4) CHIP LIGHT BARS

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	Vf @ 20mA	
	PEAK (nm)			TYP. (mcd.)	I (mA)		TYP.	MAX
SSB-LX2655ID	RED	635	RED DIFF.	50	20	160	2.1	2.8
SSB-LX2655IW	RED	635	WHITE DIFF.	50	20	160	2.1	2.8
SSB-LXC100SRD	RED	660	RED DIFF.	90	20	160	1.8	2.1
SSB-LXC100SRW	RED	660	WHITE DIFF.	90	20	160	1.8	2.1
SSB-LX2755YD	YELLOW	585	YELLOW DIFF.	40	20	160	2.1	2.8
SSB-LX2755YW	YELLOW	585	WHITE DIFF.	40	20	160	2.1	2.8
SSB-LX2855SGD	GREEN	565	GREEN DIFF.	50	20	160	2.1	2.8
SSB-LX2855SGW	GREEN	565	WHITE DIFF.	50	20	160	2.1	2.8
SSB-LX2755AD	AMBER	610	AMBER DIFF.	40	20	160	2.1	2.8
SSB-LX2755AW	AMBER	610	WHITE DIFF.	40	20	160	2.1	2.8

H.P. Equivalents With Noryl Low Cross Talk Cases

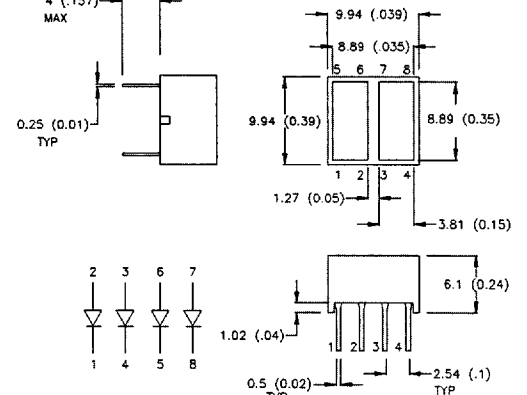
See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSB-LX2X00 SERIES
10x10mm TWO WINDOW (4) CHIP LIGHT BARS

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	Vf @ 20mA	
	PEAK (nm)			TYP. (mcd.)	I (mA)		TYP.	MAX
SSB-LX2600ID	RED	635	RED DIFF.	25	20	160	2.1	2.8
SSB-LX2600IW	RED	635	WHITE DIFF.	25	20	160	2.1	2.8
SSB-LXD100SRD	RED	660	RED DIFF.	40	20	160	1.8	2.1
SSB-LXD100SRW	RED	660	WHITE DIFF.	40	20	160	1.8	2.1
SSB-LX2700YD	YELLOW	585	YELLOW DIFF.	20	20	160	2.1	2.8
SSB-LX2700YW	YELLOW	585	WHITE DIFF.	20	20	160	2.1	2.8
SSB-LX2800SGD	GREEN	565	GREEN DIFF.	30	20	160	2.1	2.8
SSB-LX2800SGW	GREEN	565	WHITE DIFF.	30	20	160	2.1	2.8
SSB-LX2700AD	AMBER	610	AMBER DIFF.	20	20	160	2.1	2.8
SSB-LX2700AW	AMBER	610	WHITE DIFF.	20	20	160	2.1	2.8

H.P. Equivalents With Noryl Low Cross Talk Cases

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSB-L2X50 SERIES
5x20mm (4) CHIP LIGHT BARS

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	Vf @ 20mA	
	PEAK (nm)			TYP. (mcd.)	I (mA)		TYP.	MAX
SSB-LX2350ID	RED	635	RED DIFF.	50	20	160	2.1	2.8
SSB-LX2350IW	RED	635	WHITE DIFF.	50	20	160	2.1	2.8
SSB-LXB100SRD	RED	660	RED DIFF.	80	20	160	1.8	2.1
SSB-LXB100SRW	RED	660	WHITE DIFF.	80	20	160	1.8	2.1
SSB-LX2450YD	YELLOW	585	YELLOW DIFF.	40	20	160	2.1	2.8
SSB-LX2450YW	YELLOW	585	WHITE DIFF.	40	20	160	2.1	2.8
SSB-LX2550SGD	GREEN	565	GREEN DIFF.	50	20	160	2.1	2.8
SSB-LX2550SGW	GREEN	565	WHITE DIFF.	50	20	160	2.1	2.8
SSB-LX2450AD	AMBER	610	AMBER DIFF.	40	20	160	2.1	2.8
SSB-LX2450AW	AMBER	610	WHITE DIFF.	40	20	160	2.1	2.8

H.P. Equivalents With Noryl Low Cross Talk Cases

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm
