


DUAL UNIVERSAL ASYNCHRONOUS RECEIVER AND TRANSMITTER

DESCRIPTION

The XR-68C681/88C681 is a Dual Universal Asynchronous Receiver and Transmitter with 3 bytes of receive FIFO. The XR-68C681/88C681 is the improved version of the Signetics SCC2681 Dual UART with additional features.

The XR-68C681/88C681 provides independent receive and transmit operating speeds that can be selected as one of the eighteen fixed baud rates, a 16 X clock derived from a programmable counter/timer, or an external 1X or 16X clock. The baud rate generator and counter/timer can operate directly from a crystal or from external clock input. The XR-68C681/88C681 provides a power-down mode in which the oscillator is stopped but the register contents are stored.

PLCC Package

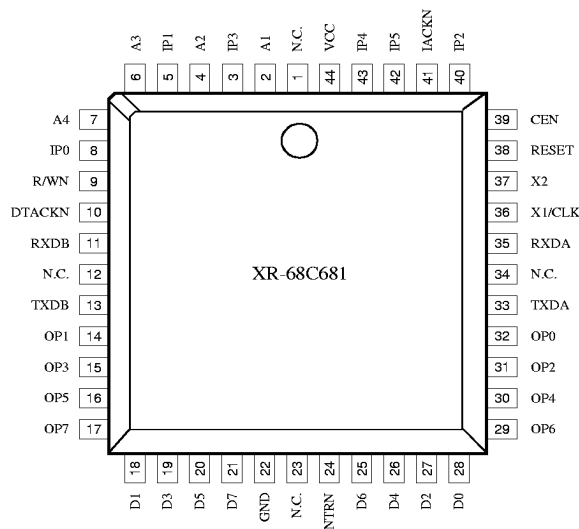


FEATURES

- Pin to pin and functional compatible to SCC2681
- 3 bytes receive FIFO
- Full duplex asynchronous transmit receive operation
- Programmable character lengths (5, 6, 7, 8)
- Parity, framing, and over run error
- Programmable 16-bit timer/counter
- On-chip crystal oscillator
- TTL compatible inputs, outputs
- Single interrupt output with seven selectable interrupting conditions
- 18 fixed baud rates from 50Hz to 1M

ORDERING INFORMATION

Part number	Package	Operating temperature
XR-88C681CP28	Plastic-Dip	0° C to + 70° C
XR-88C681CP40	Plastic-Dip	0° C to + 70° C
XR-88C681CJ44	PLCC	0° C to + 70° C
XR-68C681CP40	Plastic-Dip	0° C to + 70° C
XR-68C681CJ44	PLCC	0° C to + 70° C

Plastic-Dip Package

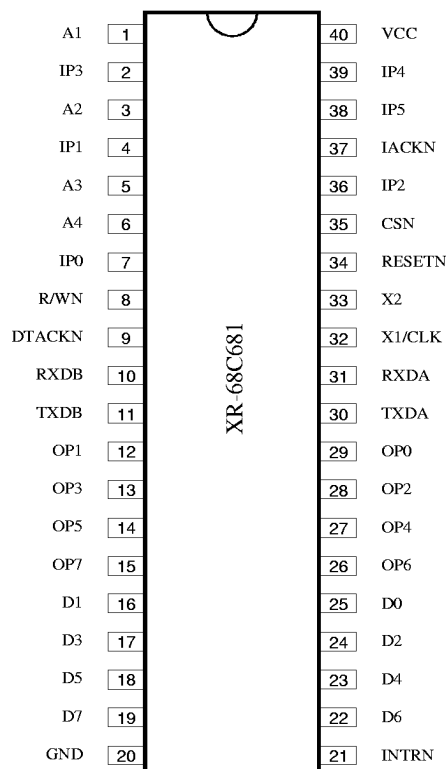

XR-68C681

XR-88C681

XR-68C681/88C681 BLOCK DIAGRAM

