



OPTi Notebook Frequency Generator

General Description

The **AV9154-06** is a low cost frequency generator designed for general purpose PC and disk drive applications. Its CPU clocks provide all necessary frequencies for 286, 386 and 486 systems, including support for the latest speeds of processors. The standard devices use a 14.318 MHz crystal to generate the CPU and peripheral clocks for integrated desktop and notebook motherboards.

The **AV9154-06** is specifically designed for use with OPTi core logic chip sets. The only noticeable difference between the two parts is in their CPU clock selection tables as shown on page three.

The **AV9154-06** can operate at $5.0V \pm 10\%$ or $3.3V \pm 10\%$, but the CPU frequencies are limited (see the asterisks on the selection tables on page three) during 3.3V operation. The parts have two power-down pins. One shuts off the CPU clock to a low state when the power-down pin is taken high, and the other turns off the 14.318 MHz output in the same manner.


Features

- Compatible with 286, 386, and 486 CPUs
- Up to 66.6 MHz (-60) or 80 MHz (-06) CPU clocks
- All loop filter components internal
- 3V and 5V operation
- 16-pin 150-mil SOIC
- Power-down control of CPU clock

Applications

Computer Motherboards: The **AV9154-06** replaces crystals and oscillators, saving board space, component cost, part count and inventory costs. It produces switchable CPU clock and up to four fixed clocks to drive floppy disk, communications, super I/O, bus and/or keyboard devices. The small package and 3V operation is perfect for handheld computers.


Block Diagram

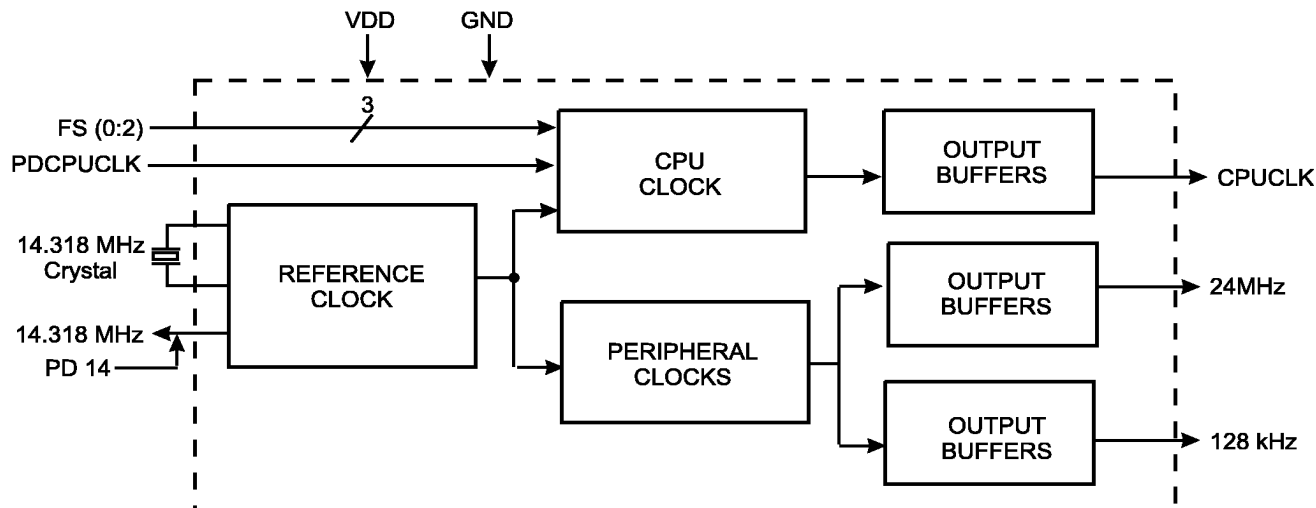



AV9154-06

Pin Configuration

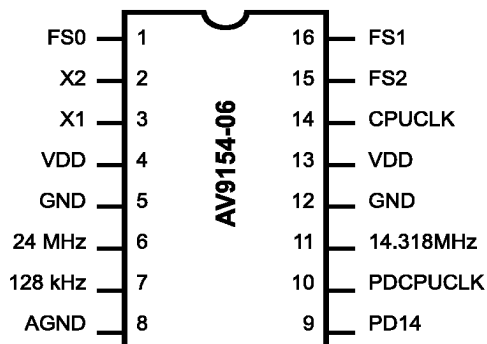

16-Pin SOIC

Functionality (in MHz.)

FS2	FS1	FS0	CPUCLK
0	0	0	16
0	0	1	20
0	1	0	25
0	1	1	33.33
1	0	0	40
1	0	1	50
1	1	0	66.66
1	1	1	80*

Actual Output Frequencies

(in MHz)

FS2	FS1	FS0	CPUCLK
0	0	0	16.11
0	0	1	20.05
0	1	0	25.06
0	1	1	33.24
1	0	0	40.09
1	0	1	50.11
1	1	0	66.48
1	1	1	80.18*

* At 5 volt VDD only.

Pin Descriptions

PIN NUMBER	PIN NAME	TYPE	DESCRIPTION
1	FS0	I	Frequency Select 0 for CPUCLK.
2	X2	O	Crystal out. Connect a 14.318 MHz crystal to this pin.
3	X1	I	Crystal in. Connect a 14.318 MHz crystal to this pin.
4	VDD	P	Digital Power (+3.3V or +5V).
5	GND	P	Digital Ground.
6	24 MHz	O	24 MHz clock output.
7	128 kHz	O	128 kHz clock output.
8	AGND	P	Analog Ground.
9	PD14	I	Power-down 14.318 MHz output (active high).
10	PDCPUCLK	I	Power-down CPU clock (active high).
11	14.318 MHz	O	14.318 MHz reference clock output.
12	GND	P	Digital Ground.
13	VDD	P	Digital Power (+3.3V or +5V).
14	CPUCLK	O	CPU Clock output determined by status of FS0 - FS2.
15	FS2	I	Frequency Select 2 for CPUCLK.
16	FS1	I	Frequency Select 1 for CPUCLK.

Note: No internal pull-ups on any Inputs.



Absolute Maximum Ratings

VDD referenced to GND 7V
Operating temperature under bias. 0°C to +70°C
Storage temperature -40°C to +150°C
Voltage on I/O pins referenced to GND. GND -0.5V to VDD +0.5V
Power dissipation 0.5 Watts

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

Electrical Characteristics at 5V

V_{DD} = +5V ± 10%, T_A = 0°C to 70°C unless otherwise stated

DC Characteristics						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Input Low Voltage	V _{IL}	V _{DD} = 5V	-	-	0.8	V
Input High Voltage	V _{IH}	V _{DD} = 5V	2.0	-	-	V
Input Low Current	I _{IL}	V _{IN} = 0V	-	-	-5	μA
Input High Current	I _{IH}	V _{IN} = V _{DD}	-	-	5	μA
Output Low Voltage	V _{OL}	I _{OL} = 4mA	-	-	0.4	V
Output High Voltage	V _{OH}	I _{OH} = -1mA	V _{DD} - 4V	-	-	V
Output High Voltage	V _{OH}	I _{OH} = -4mA	V _{DD} - 8V	-	-	V
Output High Voltage	V _{OH}	I _{OH} = -8mA	2.4	-	-	V
Supply Current	I _{DD}	No load ¹	-	25	40	mA
Output Frequency Change over Supply and Temperature	F _D	With respect to typical frequency	-	0.002	0.01	%
Short circuit current	I _{SC}	Each output clock	25	40	-	mA
Input Capacitance	C _i	Except X1, X2	-	-	10	pF
Load Capacitance	C _L	Pins X1, X2	-	20	-	pF
Supply Current, lowest	I _{DDSTBY}	When powered-down	-	20	-	mA

Note: 1 All clocks on AV9154-06 running at highest possible frequencies.



AV9154-06

Electrical Characteristics at 5V

$V_{DD} = +5V \pm 10\%$, $T_A = 0^\circ C$ to $70^\circ C$ unless otherwise stated

AC Characteristics						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Input Clock Rise Time	t_{ICr}		-	-	20	ns
Input Clock Fall Time	t_{ICf}		-	-	20	ns
Output Rise time, 0.8 to 2.0V	t_r	15pF load	-	1	2	ns
Rise time, 20% to 80% V_{DD}	t_r	15pF load	-	2	4	ns
Output Fall time, 2.0 to 0.8V	t_f	15pF load	-	1	2	ns
Fall time, 80% to 20% V_{DD}	t_f	15pF load	-	2	4	ns
Duty cycle	d_i	15pF load	40/60	48/52	60/40	%
Duty cycle, reference clock	d_i	15pF load	40/60	43/57	60/40	%
Duty cycle, CPU clock -06	d_i	15pF load	40/60	42/58	60/40	%
Jitter, one sigma	T_{ijs}	As compared with clock period	-	± 0.8	± 2.5	%
Jitter, absolute	T_{jab}		-	± 2	± 5	%
Jitter, absolute	T_{jab}	16-80 MHz clocks	-	-	700	ps
Input Frequency	f_i		-	14.318	-	MHz
Frequency Transition time	t_{ft}	From 16 to 80 MHz	-	15	20	ms
Power-up time	t_{pu}	From off to 50 MHz	-	15	-	ms

Note: 1 All clocks on AV9154-06 running at highest possible frequencies.



Electrical Characteristics at 3.3V

Operating $V_{DD} = +3.0V$ to $+3.7V$, $T_A = 0^{\circ}C$ to $70^{\circ}C$ unless otherwise stated

DC Characteristics						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Input Low Voltage	V_{IL}		-	-	$0.15V_{DD}$	V
Input High Voltage	V_{IH}		$0.7V_{DD}$	-	-	V
Input Low Current	I_{IL}	$V_{IN} = 0V$	-5	-	5	μA
Input High Current	I_{IH}	$V_{IN} = V_{DD}$	-5	-	5	μA
Output Low Voltage	V_{OL}	$I_{OL} = 8mA$	-	-	0.1	V
Output High Voltage	V_{OH}	$I_{OH} = -4mA$	$V_{DD} - 1V$	-	-	V
Supply Current	I_{DD}	Note 1	-	15	-	mA
Output Frequency Change over Supply and Temperature	F_d	With respect to typical frequency	-	0.002	0.01	%
Input Capacitance	C_i	Except X1, X2	-	-	10	pF
Load Capacitance	C_L	Pins X1, X2	-	20	-	pF
Supply Current, lowest	I_{DDL}	When powered-down	-	14	-	mA
Short Circuit Current	I_{SC}		-	30	-	mA

Note 1: AV9154 with no load, with 14.318 MHz crystal input, and CPUCLK running at 33 MHz. Power supply current

Electrical Characteristics at 3.3V


Operating $V_{DD} = +3.0V$ to $+3.7V$, $T_A = 0^{\circ}C$ to $70^{\circ}C$ unless otherwise stated

AC Characteristics						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Input Clock Rise Time	t_{ICr}		-	-	20	ns
Input Clock Fall Time	t_{ICf}		-	-	20	ns
Rise time	t_r	15pF load	-	-	4	ns
Fall time	t_f	15pF load	-	-	4	ns
Duty cycle, fixed clocks	d_i	15pF load	40/60	48/52	60/40	%
Duty cycle, CPU clock-06	d_i	15pF load	40/60	42/58	60/40	%
Duty cycle, reference clock	d_i	15pF load	40/60	43/57	60/40	%
Jitter, one sigma	T_{jls}	All frequencies	-	± 0.5	± 2	%
Jitter, absolute	T_{jabs}	All frequencies	-	± 3	± 5	%
Frequency Transition time	t_{ft}	from 8 to 33 MHz	-	-	20	ms
Power-up time	t_{pu}	from off to 50 MHz	-	15	-	ms
Output Frequency	f_o	(50 MHz for -06 version)	2	-	33	MHz
Input Frequency	f_i		-	14.318	-	MHz

Note 1: AV9154 with no load, with 14.318 MHz crystal input, and CPUCLK running at 33 MHz. Power supply current varies with frequency. Consult ICS for actual current at different frequencies.



AV9154-06

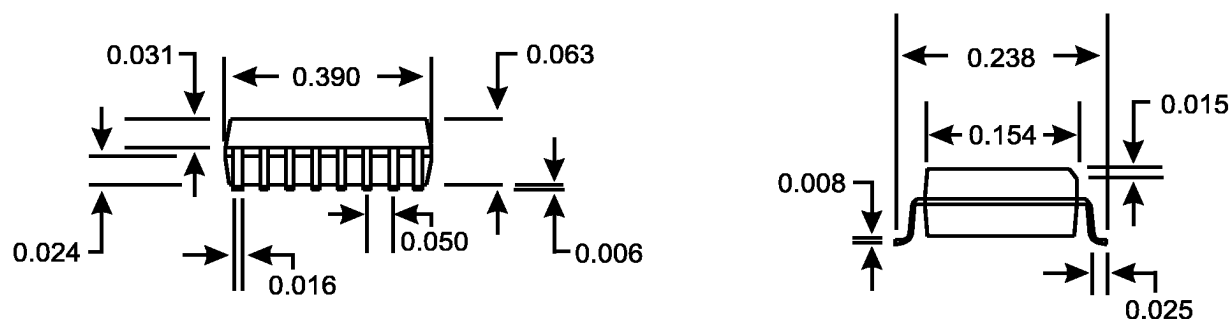

16-Pin SOIC Package

Ordering Information

AV9154-06CS16

Example:

ICS XXXX-PPP M X#W

Lead Count & Package Width

Lead Count=1, 2 or 3 digits

W=.3" SOIC or .6" DIP; None=Standard Width

Package Type

S=SOIC

Pattern Number (2 or 3 digit number for parts with ROM code patterns)

Device Type (consists of 3 or 4 digit numbers)

Prefix

ICS, AV=Standard Device; GSP=Genlock Device