




9/32 (7.2mm) PANEL MOUNT LEDs

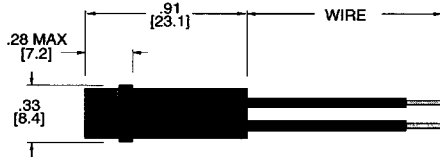


**CF290-W
CF292-W
CF296-W**




**CF290-B
CF292-B
CF296-B**




**CMF290-B
CMF292-B
CMF296-B**



**CLF290-B
CLF292-B
CLF296-B**

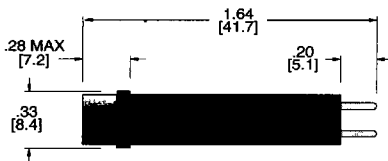


**CXF290-B
CXF292-B
CXF296-B**

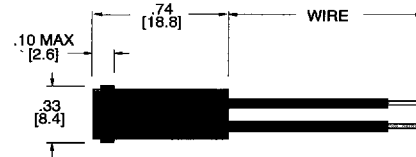


**CFS290-W
CFS292-W
CFS296-W**




**CFS290-B
CFS292-B
CFS296-B**




**CMS290-B
CMS292-B
CMS296-B**




**CLS290-B
CLS292-B
CLS296-B**

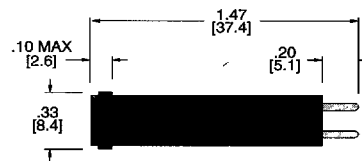


**CXS290-B
CXS292-B
CXS296-B**

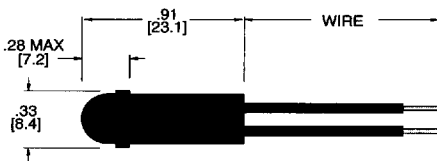


**CD290-W
CD292-W
CD296-W**




**CD290-B
CD292-B
CD296-B**




**CMD290-B
CMD292-B
CMD296-B**




**CLD290-B
CLD292-B
CLD296-B**

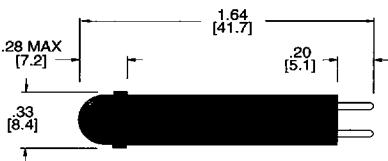


**CXD290-B
CXD292-B
CXD296-B**

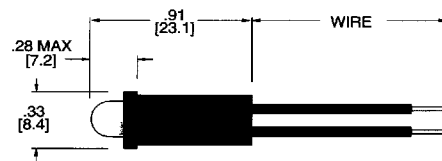


**CSD290-W
CSD292-W
CSD296-W**




**CSD290-B
CSD292-B
CSD296-B**



**CMSD290-B
CMSD292-B
CMSD296-B**



**CLSD290-B
CLSD292-B
CLSD296-B**

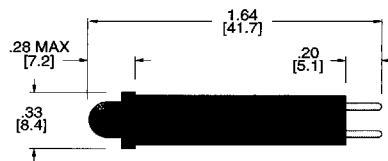


**CXSD290-B
CXSD292-B
CXSD296-B**


5423705 0000536 466

9/32 (7.2mm) PANEL MOUNT LEDs

PART NUMBER SELECTION GUIDE

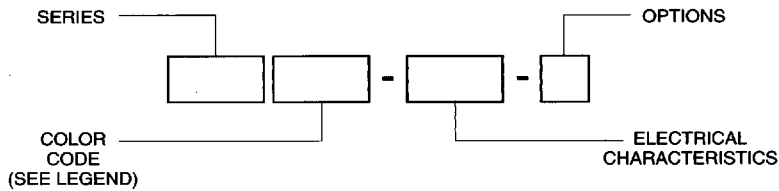

COLOR CODE LEGEND

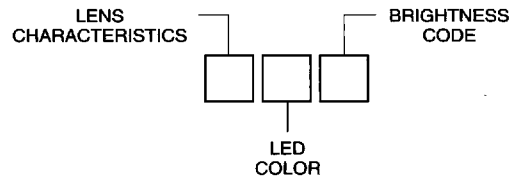

STANDARD	SERIES	COLOR CODE	ELECTRICAL CHARACTERISTICS		OPTIONS
	SINGLE CHIP CF290 CFS290 CD290	CR5 CY5 CG5	VDC 2Vf 6V 14V 28V 48V	VAC 120VAC	B - BLACK HOUSING WITH ROUND TERMINAL W6 - 6" WIRE
	6 MULTICHIP CF296 CFS296 CD296	CR6 CY6 CG6	VDC 4Vf 6V 14V 28V 48V	VAC 120VAC	


LENS CHARACTERISTICS	LED COLOR	BRIGHTNESS CODE
C-CLEAR CW-CLEAR WATER	R-RED Y-YELLOW G-GREEN B-BLUE O-ORANGE LW-LIME WHITE W-WHITE RG-RED/GREEN YG-YELLOW/GREEN	4-STANDARD 5-STANDARD 6-HIGH INTENSITY 7-HIGH INTENSITY 900-HIGH INTENSITY 3K-HIGH INTENSITY

PART SPECIFICATIONS


- PART NUMBERS CONSISTING OF OPTIONS NOT FOUND IN THE STANDARD BOX ARE CUSTOM.
- FOR COMPLETE PART NUMBER SELECT ONE OPTION FROM EACH OF THE FOUR COLUMNS FROM LEFT TO RIGHT.
- BRIGHTNESS CODES LISTED ARE SET BY THE FACTORY FOR ALL COLORS. THE ABOVE CHART IS FOR REFERENCE ONLY.
- MOUNTING DIAMETER 0.290 (7.4mm) TO 0.294 (7.5mm).
- PANEL THICKNESSES FROM 0.031 (0.8mm) TO 0.250 (6.4mm).
- HOUSING MATERIAL IS BLACK NYLON UL 94V-2 OR BLACK ANODIZED ALUMINUM.
- WIRE LEADS ARE RED FOR ANODE AND BLACK FOR CATHODE.
- TERMINALS ARE 0.040 (1.0mm) ROUND.

CUSTOM	SERIES	COLOR CODE	ELECTRICAL CHARACTERISTICS		OPTIONS
	SINGLE CHIP CF290 CFS290 CD290 CSD290	CR900 CY3K CB5 CB5 CWRG4 - BICOLOR CWYG4 - BICOLOR	VDC 5V 12V 24V 36V 60V	VAC 5VAC 6VAC 12VAC 14VAC 24VAC 28VAC 36VAC 48VAC 60VAC	W12 - 12" WIRE W18 - 18" WIRE W24 - 24" WIRE
	M, L, X VERSIONS				
	DUAL CHIP CF292 CFS292 CD292	CR3K CR5 CY3K CY5 CG6 CO5 CB5			
	M, L, X VERSIONS				
	6 MULTICHIP CF296 CFS296 CD296	CR7 CY3K CO6 CB6 CLW6 CW6			
	M, L, X VERSIONS				

OPTIONAL MOUNTING HARDWARE

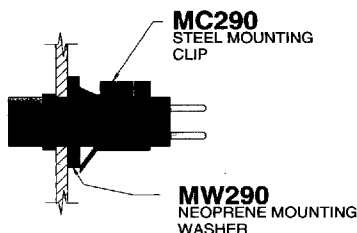

OPTIONAL CONNECTORS

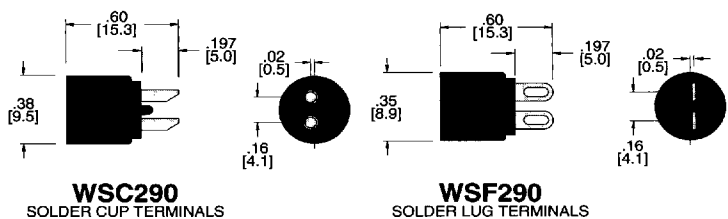

5423705 0000537 3T2